



## DISPLAY PANEL - DASHBOARD


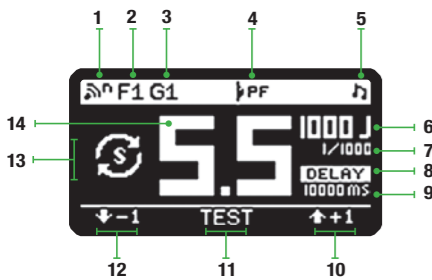


- 1 EL-Skyport synchronisation normal/ speed
- 2 EL-Skyport Frequency channel
- 3 EL-Skyport Group number
- 4 Photocell status
- 5 Ready beep
- 6 Power in J
- 7 Flash duration in s
- 8 Flash function
- 9 Flash function value
- 10 Increase 1 f-stop (R)
- 11 Open flash test (S)
- 12 Decrease 1 f-stop (L)
- 13 Recycling mode
- 14 Power in f-stop equivalent


## DISPLAY PANEL - MAIN MENU

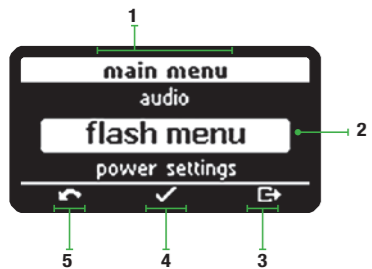


- 1 Menu title
- 2 Menu selected
- 3 Menu exit (back to dashboard) (R)
- 4 Enter (S)
- 5 Back (L)

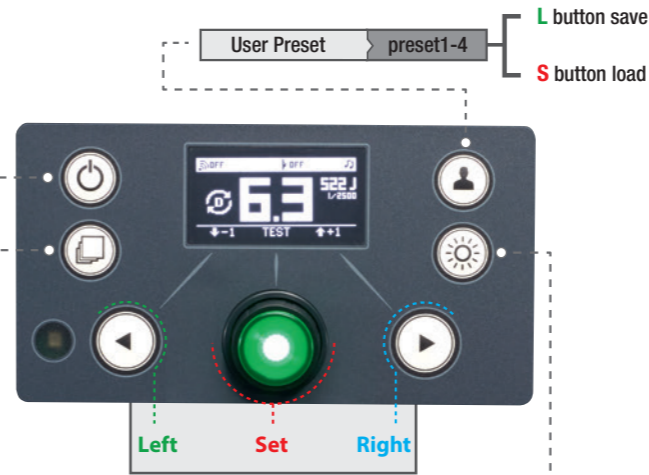

	1° level	2° level	3° level
photocell	off/on		
	preflash		
	preflash setup	auto	manual   block time   timeframe
skyport (radio)	off (r.0)		
	normal (r.1)		
	speed (r.2)		
	group	group 1 to 4	
	channel	channel 1 to 20	
audio	beep volume	off   low   min   default   high   max	
	beep tone	Tone (0 to 10)	
	key click	off   low   default   high   max	
flash mode	default		
	sequence	unit index   total units   seq. timeout	
	delayed	set delay (in ms)	
	strobo	frequency   duration	
	setting	Setup of activated mode	
power settings	recycling time	default   fast   slow	
	standby	from[off] to [60min] in steps of 5 min	
	auto off	from[off] to [10hrs] in steps of 1 hour	
statistics			

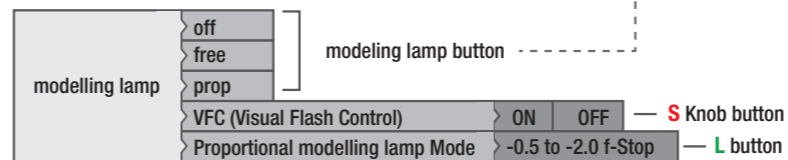

## DISPLAY PANEL - MODELING LAMP

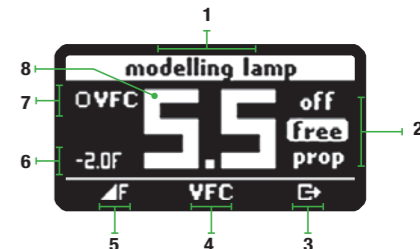


- 1 Setting title
- 2 Modelling lamp status
- 3 Back to dashboard (R)
- 4 Visual Flash Confirmation function (S)
- 5 Proportional modelling lamp setup (L)
- 6 Proportional modelling lamp value
- 7 Visual Flash Confirmation status
- 8 Modelling lamp power in f-stop

## KNOB COLOR INFO




DISPLAY	DESCRIPTION
GREEN	ready
GREEN BLINKING	discharging
ORANGE	charging
RED BLINKING	flashing before 100% ready
RED BREATHING	standby

## EL-SKYPORT TRANSMITTER SPEED

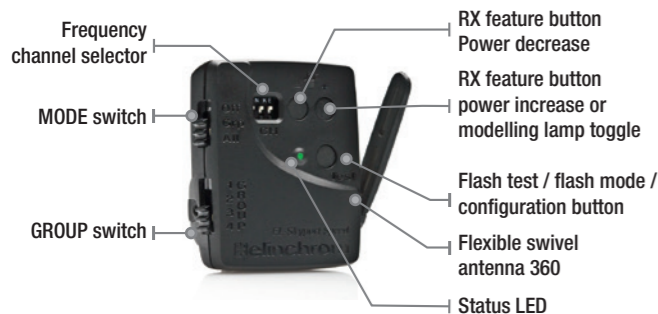

## FREQUENCY CHANNEL



## ERROR MANAGEMENT

ERROR NUMBER	DESCRIPTION	SOLUTION
1	Capacitor over voltage	Switch the unit off, <b>wait 2 minutes</b> and switch the unit on again. If the error shows up again the unit requires a check up at an authorized Elinchrom service centre.
2	Over heat	Wait until the unit has cooled down. The unit will switch back to the normal operation as soon as the temperature decreases to a normal working level.
3	Discharge error	Switch the unit off, <b>wait 2 minutes</b> and switch the unit on again. If the error shows up again the unit requires a check up at an authorized Elinchrom service centre.
4	Charge timeout error	
5	Zero detect fault	
6	Charge hold error	
8	Fan error	The unit has detected a mains supply fault. Please check the mains/battery supply. It could be not working correctly.
10	Supply input voltage too high	
11	Supply input voltage too low	
12	Supply under voltage detected until charge	Switch the unit off, <b>wait 2 minutes</b> and switch the unit on again. If the error shows up again the unit requires a check up at an authorized Elinchrom service centre.
13	Over current detection	
15	Temperatur sensor "Heat Sink" not connected	
16	Temperatur sensor "Front" not connected	
17	Temperatur sensor "Charge" not connected	Switch the unit off, <b>wait 10 minutes</b> and switch the unit on again. If the error shows up again the unit requires a check up at an authorized Elinchrom service centre.
20	Power Board not connected / found	
24	Capacitor voltage symmetry error	Switch the unit off, <b>wait 2 minutes</b> and switch the unit on again. If the error shows up again the unit requires a check up at an authorized Elinchrom service centre.
28	Flash tube after glow	
29	Auto Ignition on Charge	
30	Auto Ignition on Ready	



is a registered trademark of ELINCHROM LTD, RENENS, SWITZERLAND

## Quick Start Guide

**ELC Pro HD**

### DOWNLOAD THE ELC USER GUIDE

Please get the complete user guide at this link:

<http://bc.gs/27>



Elinchrom LTD - ELC Pro HD - Made in Switzerland  
 Av. de Longemalle 11, P. O. Box -458, CH-1020 Renens, Switzerland,  
 Tel. : + 41 21 637 26 77 Fax: +41 21 637 26 81 E-mail: elinchrom@elinchrom.ch  
[www.elinchrom.com](http://www.elinchrom.com)

Elinchrom SA - ELC Pro HD - Made in Switzerland - 01.11.2016 (73019)