



Bluetooth dimmer LD220WCM

0-200VA

Bluetooth pushbutton dimmer in junctionbox shape. Specially designed for LED lamps. The dimmer is also well suited for dimming of LED. The dimmer is also well suited for dimming of LED-drivers and incandescent light.



LD220WCM
V-4022010IB

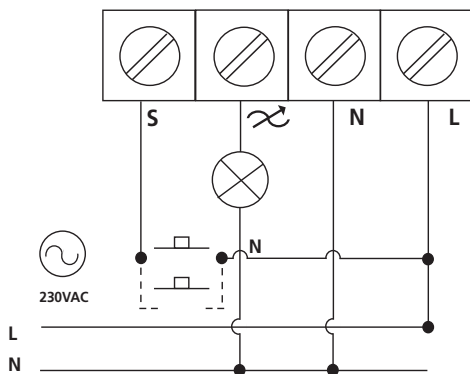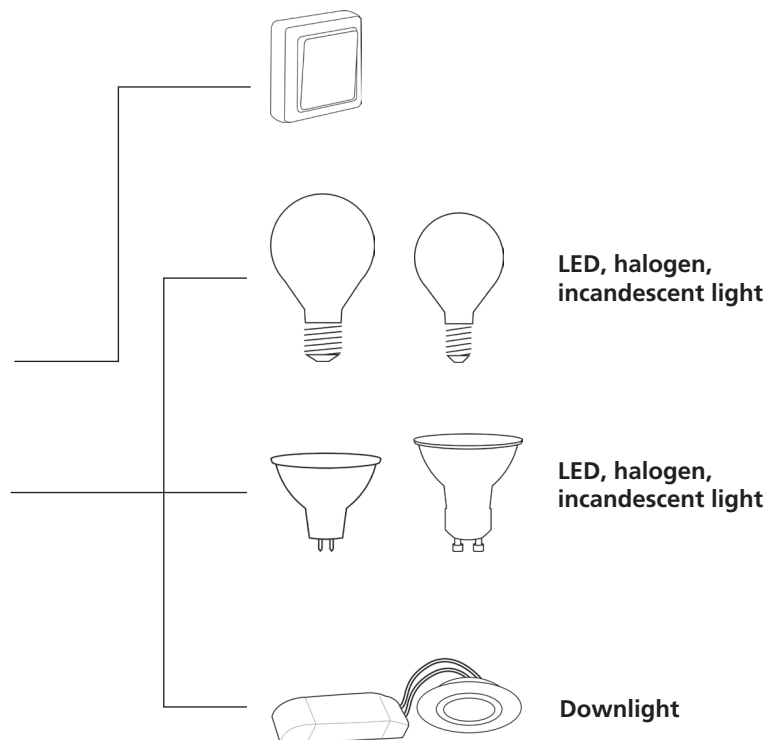

Bluetooth dimmer LD220WCM

Weight	LD220WCM
Item number	0-200VA
Load	V-4022010WCM
Input voltage	220-240V
Standby Power	0.2W
Max	0,87 A
Frequency	50/60Hz
Dimming control	One or more pushbutton switch and/or via bluetooth
Softstart	Yes
Dimming level memory	Yes
Protection agains over temperature	Yes, automatic recovery after removal of faults
Mount	Built-in mounting box or wall mounting
Working humidity	0...80%, non conductive
Working temperature	-20 ~ 50°C
Dimensions LxWxH	48,5 x 50 x 15,5 mm
Weight	31 gram
Housing	
- colour	White
- material	Polyamide plastic
- flame class	V-0
For dimming of	For dimmable low energy lamps, 230V LED, electronic transformers, LED-drivers, incandescent light and 230V halogenlamps. Do not forget to take into account the reactive power in the calculation of the load.
Dimming range	1% - 100%
Isolation class	IP20
Protection index	II
Approvals	CE/S
Manufacturing standard	EN60669