About the Guide

- This quick start guide is for reference only. Minor difference might be found in user interface.
- All the design and software here are subject to change without prior written notice.
- All trademarks and registered trademarks mentioned are the properties of their respective owners.
- Please visit our website or contact your local service engineer for more information.
- If there is any uncertainty or controversy, please refer to our final explanation.

Operating with Imou Life App

Step 1

Scan the following QR code or search "Imou Life" in Google Play or App Store to download and install the app.

Note: If you have installed the app, update it to the latest version.

Step 2

Run Imou Life App, and then register an account for the first use.

Step 3

Power up the camera, and when the booting is finished, the green light is on.
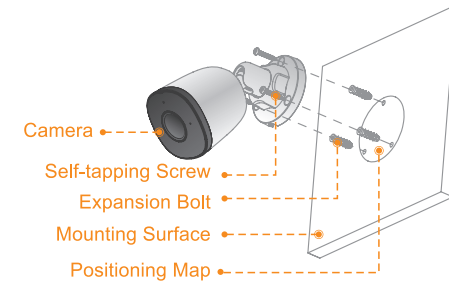
Step 4

Add a camera to Imou Life App

On the **Device** interface, tap + on the upper-right corner, scan the QR code on the bottom of the camera or enter the serial number, and do the operations as the screen instruction.

Note: If you have more than one camera, do step 4 to add them one by one.

Installing Camera

Note: Make sure that the mounting surface is strong enough to hold at least three times of the device weight.

Camera

Self-tapping Screw

Expansion Bolt

Mounting Surface

Positioning Map

Step1 Drill screw holes on the mounting surface as the positioning map shows, and then put in the expansion bolts.

Step2 Attach the pedestal to the mounting surface with the self-tapping screws.

Step3 Power up the camera, and then adjust the lens to the ideal angle.

FAQ

▶ Q: The camera cannot work normally or start?

Make sure that the network cable is connected well, and the NVR or switch supports PoE power supply.

▶ Q: Where are the recorded videos saved?

- Scene 1
  Recorded videos are saved in NVR.
- Scene 2
  When the Imou cloud is enabled, recorded videos are saved in Imou cloud.

▶ Q: The IR effect is not good?

The infrared light is reflected to the lens, so the effect is not good. Adjust the lens angle to avoid occlusions around the lens.

Quick Start Guide

Version 1.0.0

Packing List
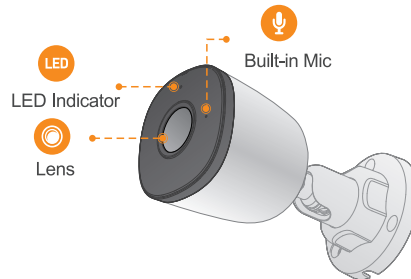

Camera ×1

Positioning Map ×1

Waterproof Connector ×1

Screw Package ×1

QSG ×1
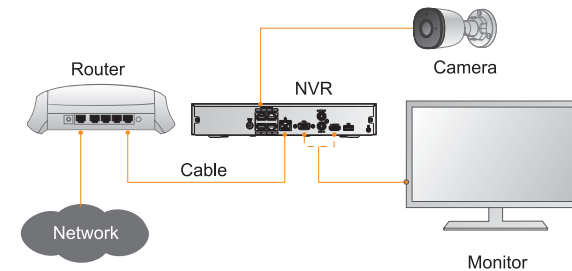
T2.00XXXXXX

Camera Introduction

Built-in Mic

LED Indicator

LED

Lens

The pattern of the LED indicator is included in the following table.

LED Indicator Status	Device Status
Off	Powered off/LED turned off
Red light on	• Booting • Device malfunction
Green light on	Operating properly
Red light flashing	Network connection failed
Green and red lights flashing alternately	Firmware updating

Application

Scene 1

Router

Network

Cable

NVR

Camera

Monitor

Scene 2

Router

PoE Switch

Cable

Network

Camera

Smart phone