



Racing Brake Discs Dimensions Table

Code	Application	Disc Ø	Inner Ø	Holes axis	Holes Ø	Holes n°	Offset mm.	Th. mm.
08670311	A	320	64	80,0	8,5	6	10,5	6
08670321	-	320	80	101,5	8,5	6	10,5	6
08670326	-	320	80	101,5	8,5	6	10,5	6,5
08670330	-	320	58	74,0	6,2	5	15,5	6
08670355	-	320	69	86	8/13	3+3	17,5	6
08670365	-	320	64	86,0	10,2	5	7,8	6
08670366	-	320	69	91	10	10	3,4	6
08715070	-	320	60	80,0	8,2	6	21,0	6
08715030	H	320	72	90,0	8,5	5	10,0	6
08715071	-	320	60	80,0	8,5	6	13,0	6
08715150	B	320	132	150,0	8,5	5	0,0	6
08755010	C	320	94	110,0	6,5	6	13,0	6
08755011	D	320	80,5	100,0	10,5	5	0,0	6
08755012	E	320	100	120,0	10,5	5	0,0	6
08755013	F	320	72	90,0	8,5	5	15,5	6
08755014	I	320	72	90,0	8,5	5	15,5	6
08715066	G	320	69	91,0	10,2	5	0,0	6
08715021	-	305	58	74,0	6,2	6	19,5	6
08715040	-	305	69	91,0	10,2	10	8,0	6
08715041	-	305	69	91,0	10,2	10	0,0	6
08715042	-	305	69	91,0	10,2	10	9,1	6
08715055	-	305	64	80,0	8,5	3	22,5	6
08715078	-	305	60	80,0	8,2	6	13,0	6
08715040	-	305	69	91,0	10,2	10	8,0	6
08670317	-	290	80	101,5	8,5	6	10,5	6
08670352	-	290	64	80,0	8,2	6	10,5	5,5
952000	-	200	==	124,0	9,0	4	0,0	3,5
800316	-	190	64	80,0	8,5	3	0,0	3,5

VENTILATED RACING DISC


XA0J420/21	-	305	80	101,5	8,5	6	11,5	8
XA0J434/35	-	305	72	90,0	8,5	5	11,5	8
08715034	-	218	69	86,0	8,2	3	12,0	8

Attention: In case the original disc has a lower diameter than Brembo 320, place some caliper spacers (see page 64) to get the correct matching (see drawing 5 chapter 6 of installation instructions). Height Brembo braking band = 30 mm., check that the original pads aren't higher than 30 mm. If it is so, remove the lower exceeding friction material in accordance with the drawing 5 chapter 6 of installation instructions. Using Brembo Racing calipers it is not necessary to modify the original pads.

Attenzione: Nel caso il disco originale sia di diametro inferiore al Brembo 320, occorre utilizzare dei distanziali per le pinze (fare riferimento a pagina 64) per ottenere il corretto lavoro delle pastiglie (vedi punto 6 figura 5 delle istruzioni di montaggio). Altezza fascia frenante Brembo = 30 mm., verificate che la pastiglia originale non superi questa misura. Se fosse d'altezza maggiore occorre asportare la parte bassa del materiale d'attrito in modo che l'appoggio al disco rispecchi lo schema indicato al punto 6 figura 5 delle istruzioni di montaggio. Utilizzando pinze Brembo Racing questa modifica non risulta necessaria.



Racing Brake Discs Dimensions Table

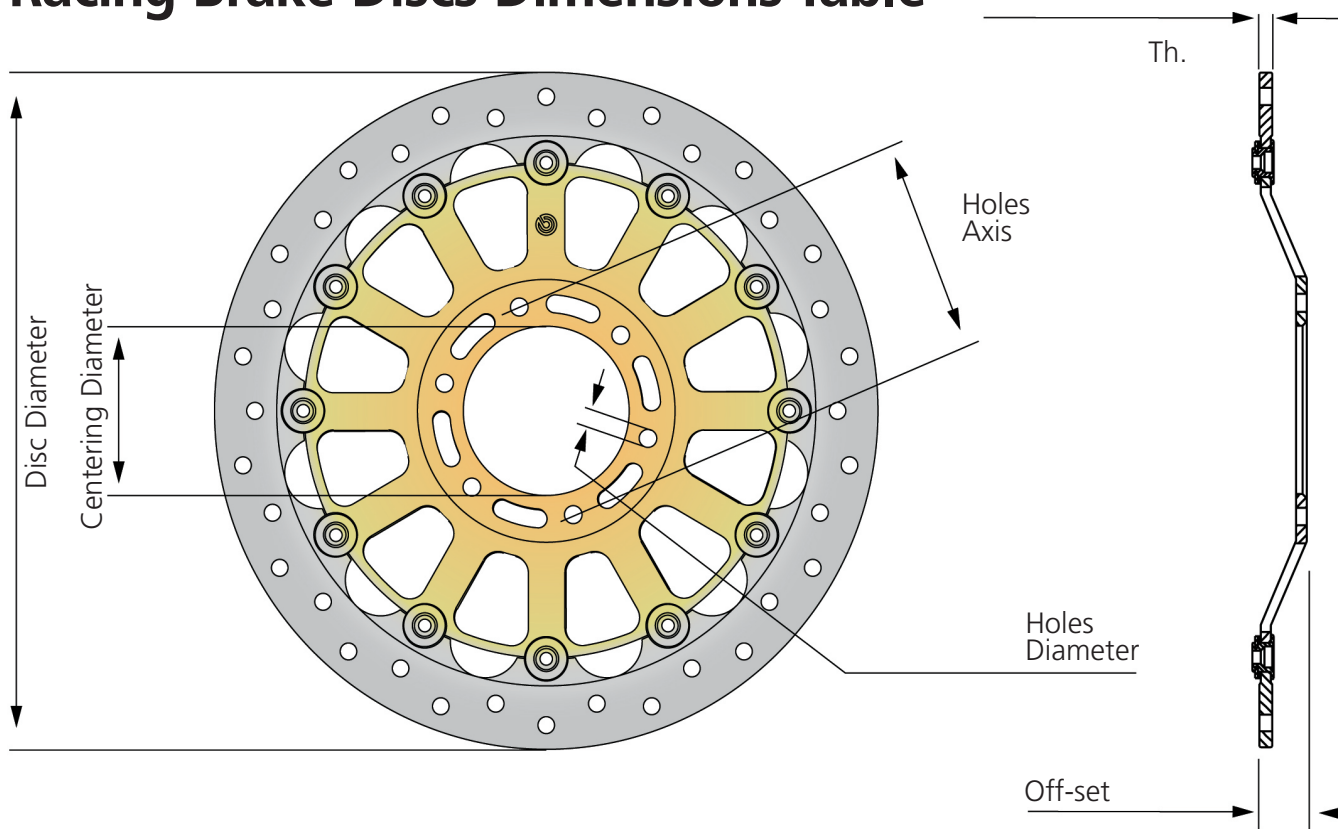

63

Applications list • Applicazioni



- A > Aprilia RSV / Ducati 748 - 916 - 996 - 998 / Mondial PIEGA**
Disc used on different version of these models, please ask
Disco per varie versioni di questi modelli, chiedere per conferma
- B > Yamaha R6 '05 > / R1 '04 >**
original disc diameter 310 / 320 mm.
- C > Honda CBR 600RR '05 > / 1000RR '04 >**
original disc diameter 310 / 320 mm.
- D > Kawasaki ZX 10R '04 > / ZX 6R '05 / '06 e ZX 6RR '05 >**
original disc diameter 300 mm.
- E > Suzuki GSX 600R '06- GSX 750R '06 - GSX 1000R '05 >**
original disc diameter 310 mm.
- F > Ducati 749 / 999**
(Original replacement / Ricambio originale)
- G > Suzuki GSX 600R '97/'03 - GSX 750R '96/'03 - GSX 1000R '01/'02**
original disc diameter 320 mm.
- G > Suzuki GSX 600R '04/'05 - GSX 750R '04/'05 - GSX 1000R '03/'04**
original disc diameter 300 mm.
- H > DUCATI 999 RS (SBK clienti)**
(Original replacement / Ricambio originale)
- I > MV Agusta F4 750 - F4 1000 - Brutale 750/910**
(Original replacement / Ricambio originale)