scheppach

Germany

TOOLS
CATALOGUE



INDEX

WOODWORKING MACHINES

Plunge saws	4 – 10
Mitre saws	11
Sliding mitre saws	12 – 24
Multipurpose workstations	25
Machine stands	26 – 27
Table mitre saws	28
Table saws	29 – 36
Scroll saws	37 – 41
Bench / Top shaper-router	42
Band saws	43 – 52
Planer thicknessers	53 – 54
Dust collectors	55 – 59
Wood turning lathes	60 – 61

SHARPENING SYSTEMS

Wet stone sharpening systems	62 – 68
Bench grinders	69 – 72
Grinder linishers	73
Belt and disc sanders	74 – 76
Spindle sanders	77 – 79
Grinder polishers	80
Multi task and drill bit sharpeners	81
Drywall and tri-angle sanders	82 – 87

FIREWOOD

Horizontal log splitters	88 – 89
Vertical log splitters	90 – 91
Log splitters for one-metre logs	92 – 99
Log saws	100 – 109
Rolling table circular saws	110 – 112

METALWORKING MACHINES


Drills	113 – 117
Professional drills	118 – 119
Cut-off saws	120
Metal band saws	121









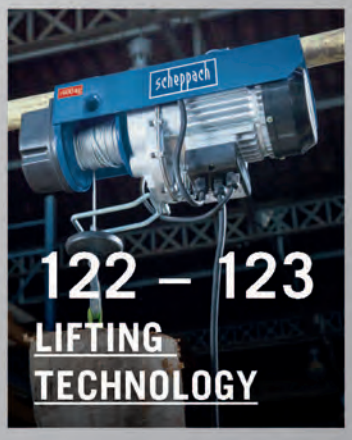









INDEX

LIFTING TECHNOLOGY

Chain hoists	122
Electric hoists	123

CONSTRUCTION MACHINES

Tile saws	124 – 125
Block splitters	126 – 129
Rotary hammers	130 – 132
Demolition hammers	133 – 134
Concrete mixers	135 – 136
Plate compactors	137 – 141
Tamper	142
Earth auger	143
Dumpers	144 – 145
Paddle mixers	146 – 148
Power generators	149 – 155

COMPRESSED AIR TECHNOLOGY

Portable compressors	156 – 158
Compressors	159 – 175
Pneumatic spade	176 – 181

WORKSHOP

Tool cabinets	182 – 185
Welding equipment	186 – 188

CLEANING TECHNOLOGY

Push sweeper	189
High-pressure cleaners	190 – 194
Wet / dry vacuum cleaners	195 – 203

INNOVATION by scheppach

selbst ist der Mann
Das Do-it-yourself-Magazin
SELBST AUSPROBIERT
RESULT: TTTTT
Rated as "GOOD"
Edition 08/2012
www.selbst.de

- Plunge saw
- Hand held circular saw
- Panel sizing saw

3 IN 1

360°

RIVING KNIFE (STANDARD)

55 mm

160 MM Ø BLADE

SPECIFICATIONS

Dimensions L x W x H	340 x 260 x 235 mm
Blade Ø	160 mm
Arbor Ø	20 mm
Blade speed	5500 rpm
Max. cut 90°	55 mm
Max. cut 45°	45 mm
Bevel capacity	0 – 45°
Close to wall cut	16 mm
Dust collection Ø inner / outer	35 / 38 mm
Motor	230 – 240 V~
Input	1200 W

LOGISTICAL DATA

Weight net / gross	7.4 / 8.2 kg
Packaging dimensions	710 x 260 x 270 mm
Order No	5901802915
Barcode	4046664025665
20 Container	830 pcs
40 Container	1660 pcs
40 HQ Container	1940 pcs





Ideal for edging up to 16 mm from the wall. Another example of PL55's diverse operations.

OPTIONAL ACCESSORIES CAN BE FOUND ON PAGE 10

PL55 | 6.3" PLUNGE SAW

THE COMBINATION OF A SCHEPPACH PL55 – PLUNGE SAW, AND A GUIDE RAIL WILL CREATE A SYSTEM THAT GENERATES PRECISION CUTS ANYWHERE THAT SHOULD NEVER BE ATTEMPTED WITH A TRADITIONAL CIRCULAR SAW.

- Powerful 1200 Watt motor
- Parallel plunge allows the user to maintain a smooth and constant hand position while cutting
- A 24 tooth blade gives a fine and accurate finish with very little breakout in laminates
- The enclosed guard gives a 90 % dust extraction capability
- 55 mm depth of cut allows the trimming and sizing of most common door sizes
- Suitable for boards and solid wood
- 16 mm – close to wall cut
- With the PL55, anyone can get great results in the workshop or on the jobsite













OPTIONAL ACCESSORIES CAN BE FOUND ON PAGE 10

36V LI-ION POWER

360°

3 IN 1

- Plunge saw
- Hand held circular saw
- Panel sizing saw

160 MM Ø BLADE

55 mm



INCLUDED 2 x 700 MM RAILS, ANTI TIP,
2 AH / 36 V BATTERY, RAIL CONNECTOR & QUICK CHARGER

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 10









PL55Li | 6.3" ACCU PLUNGE SAW

WITH THE SCHEPPACH PL55Li YOU ARE NO LONGER DEPENDENT ON A MAINS POWER SUPPLY. THE SCHEPPACH PL55Li – ACCU PLUNGE SAW COMBINED WITH A GUIDE RAIL WILL CREATE A SYSTEM THAT GENERATES PRECISION CUTS ANYWHERE THAT SHOULD NEVER BE ATTEMPTED WITH A TRADITIONAL CIRCULAR SAW.

- 36 V Accu power
- Parallel plunge allows the user to maintain a smooth and constant hand position while cutting
- A 24 tooth blade gives a fine and accurate finish
- The enclosed guard gives a 90 % dust extraction capability
- 55 mm depth of cut allows the trimming and sizing of most common door sizes
- Suitable for boards and solid wood
- 16 mm – Distance-to-wall cut
- With the PL55Li, anyone can get great results in the workshop, on the jobsite or anywhere else
- Precise cuts in wood, work plates, laminate and plastics
- Recommended from craftsmen for its handling and weight distribution

Scheppach Akku-Handkreissäge PL55Li
Fußböden und Wände
Oberklasse
Heimwerker Praxis
2018
Preis/Leistung: gut - sehr gut
1,4

selbst ist der Mann
Das Do-it-yourself-Magazin
SELBST AUSPROBIERT
RESULT: TTTTT
Rated as "VERY GOOD"
Edition 08/2018
www.selbst.de

SPECIFICATIONS

Dimensions L x W x H	310 x 240 x 255 mm
Blade Ø	160 mm
Arbor Ø	20 mm
Blade speed	4300 rpm
Max. cut 90°	55 mm
Max. cut 45°	41 mm
Bevel capacity	0 – 45°
Distance-to-wall cut	16 mm
Dust collection Ø inner / outer	35 / 38 mm
Battery	36 V DC / 2.0 Ah Lithium

LOGISTICAL DATA

Weight net / gross	5.3 / 8.5 kg
Packaging dimensions	730 x 270 x 275 mm
Order No	5901806903
Barcode	4046664064206
20 Container	594 pcs
40 Container	1188 pcs
40 HQ Container	1320 pcs

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 10

3 m

selbst ist der Mann
Das Do-it-yourself-Magazin
SELBST AUSPROBIERT
RESULT: TTTTT
Rated as "GOOD"
Edition 11/2015
www.selbst.de



3 IN 1

- Plunge saw
- Hand held circular saw
- Panel sizing saw

SPECIFICATIONS

Dimensions L x W x H	420 x 300 x 235 mm
Blade Ø	210 mm
Arbor Ø	30 mm
Blade speed	4500 rpm
Max. cut 90°	75 mm
Max. cut 45°	55 mm
Bevel capacity	0 – 45°
Distance-to-wall cut	16 mm
Dust collection Ø inner / outer	35 / 38 mm
Motor	230 – 240 V~
Input	1600 W

360°

LOGISTICAL DATA

Weight net / gross	6.9 / 7.6 kg
Packaging dimensions	430 x 240 x 315 mm
Order No	5901804901-901
Barcode	4046664042396
20 Container	810 pcs (670 pcs with 1400 mm rail)
40 Container	1680 pcs (1350 pcs with 1400 mm rail)
40 HQ Container	1920 pcs (1540 pcs with 1400 mm rail)





OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 10


PL75 | 8.3" PLUNGE SAW

WHEN USED IN CONJUNCTION WITH THE OPTIONAL 1400 MM GUIDE RAIL THE SCHEPPACH PL75 NOW BECOMES A 3 IN 1 PLUNGE SAW SYSTEM WHICH ALLOWS YOU TO COMPLETE A VARIETY OF PRECISION CUTS WHICH ARE IMPOSSIBLE WITH A TRADITIONAL ELECTRIC HANDSAW. CHOOSE A PL75 PACKAGE AND REALISE YOUR POTENTIAL.

- Powerful 1600 Watt motor
- The parallel plunge cutting system maintains constant and smooth position whilst sawing
- The standard 36 tooth TCT saw blade gives a fine and accurate finish being complemented with the spring loaded riving knife for unimpeded plunge cuts
- Enclosed guard system provides excellent dust extraction (extractor not provided)
- 75 mm depth of cut allows trimming and sizing of doors etc. plus the cutting capacity for those bigger projects when required
- Suitable for boards and solid wood
- Flush cuts to within 16 mm
- Everyone can achieve professional results with PL75
- In the workshop or on site
- 3 m rubber cable
- Tilt safety device included. Prevents the saw from tipping when in tilt mode
- Includes 1400 mm Rail, clamps, rail connector and anti tip



INCLUDED 1400 MM RAIL, CLAMPS, RAIL CONNECTOR & ANTI TIP

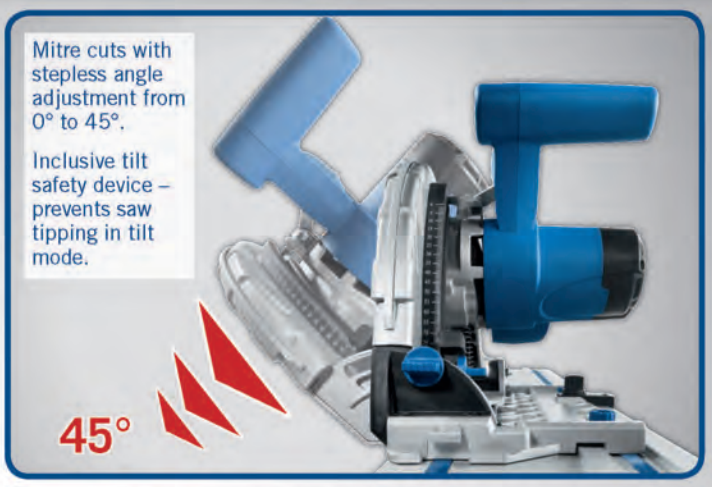

Mitre cuts with stepless angle adjustment from 0° to 45°.

Inclusive tilt safety device – prevents saw tipping in tilt mode.



Massive 75 mm depth of cut equal to cutting capacity of many circular saw benches. Perfect parallel cutting every time.



Perfect for kitchen worktops. Only possible with a plunge saw system splinter-free. Even an amateur can achieve exact parallel splinter free cuts using the PL75 with optional guide track system.



PL75 ideal whatever the material: • solid natural timbers • chipboard • plywood • even MDF and double coated boards ...



Retractable riving knife for unimpeded plunge cuts. Splinter-free edges thanks attachable splinter guard.

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 10

PL75 / PL55 / PL55Li

	Description	Order Numbers	Barcode
1 **Accessory package**	2 x clamping devices 1 x guide track connector 1 x limit stop	3901802702	4046664013990
2 **Guide rail**	1400 mm	4901802701	4014915075158
3 **Saw blades** Hard & Softwood, Laminate, Plastic	PL75: Ø 210 x 30 mm / 36 T Ø 210 x 30 mm / 72 T	7901800601 7901800602	4046664035725 4046664035732
	PL55 / PL55Li: Ø 160 x 20 x 2.4 mm / 24 T Ø 160 x 20 x 2.2 mm / 48 T	3901802704 3901802705	4046664014256 4046664014263
4 **Anti tip**		3901802703	4046664014652
5 **Accu BP2A-Li36V** for PL55Li		7901806701	4046664065777
6 **Charger BC2A-Li36V** for PL55Li		7901806702	4046664065784



PL45

	Description	Order Numbers	Barcode
1 **Accessory package**	2 x clamping devices 1 x guide track connector 1 x limit stop	3901803705	4046664023258
2 **Guide rail**	1400 mm	4901803702	4014915083016
3 **Saw blades** Hard & Softwood, Laminate, Plastic	Ø 145 x 20 x 2.4 mm / 24 T Ø 145 x 20 x 2.4 mm / 48 T	3901803703 3901803704	4046664022848 4046664022855



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 10

HM80L | 8" COMPOUND MITRE SAW

THIS MODEL IS A SMALL, ECONOMICAL MITRE SAW FOR THE DIY ENTHUSIAST DOING OCCASIONAL CUTS. WITH ITS FULLY MACHINED ALUMINIUM BASE, IT IS LIGHT AND THEREFORE EASILY TRANSPORTED. DESPITE ITS LIGHT WEIGHT, HOWEVER, THE HM80L IS VERSATILE, PERMITTING THE EXECUTION OF EXACT MITRE ALLOWING THE COMPLETION OF ACCURATE MITRES, BEVELS AND COMPOUND CUTS WITH THE HELP OF GUIDES ON THE TABLE AND ARM.

- Lightweight die cast aluminium design for easy transport
- Powerful 1.5 kW motor enables various cutting applications
- Compact bench top design fits conveniently in small workshop environments
- The 24-tooth carbide tipped blade stays sharp and makes clean cuts
- Big cross cut capacity up to 120 mm
- Fully enclosed blade guard for operator safety
- Torsion resistant design and top quality construction

360°



90° / 90°	120 x 60 mm
90° / 45°	80 x 60 mm
45° / 45°	80 x 35 mm
45° / 90°	120 x 35 mm
-22.5° / 90°	120 x 55 mm
90° / 22.5°	118 x 60 mm

LOGISTICAL DATA

Weight net / gross	7.7 / 9 kg
Packaging dimensions	490 x 330 x 340 mm
Order No	3901105915
Barcode	4046664017028
20 Container	204 pcs
40 Container	1040 pcs
40 HQ Container	1200 pcs



SPECIFICATIONS

Dimensions L x W x H	395 x 340 x 468 mm
Blade Ø	210 mm
Blade speed	5000 rpm
Bevel type	1 x 45°
Mitre capacity	45° left / -45° right
Cross cut at 90°	120 x 60 mm
Mitre cut at 45°	80 x 35 mm
Mitre slots	45-30-22.5-15-0-15-22.5-30-45°
Motor	220 – 240 V~
Input	1500 W

Issue 2019-06-18 | Changes reserved


360°

90° / 90°
340 x 58 mm

90° / 45°
240 x 58 mm

45° / 45°
240 x 32 mm

45° / 90°
340 x 32 mm

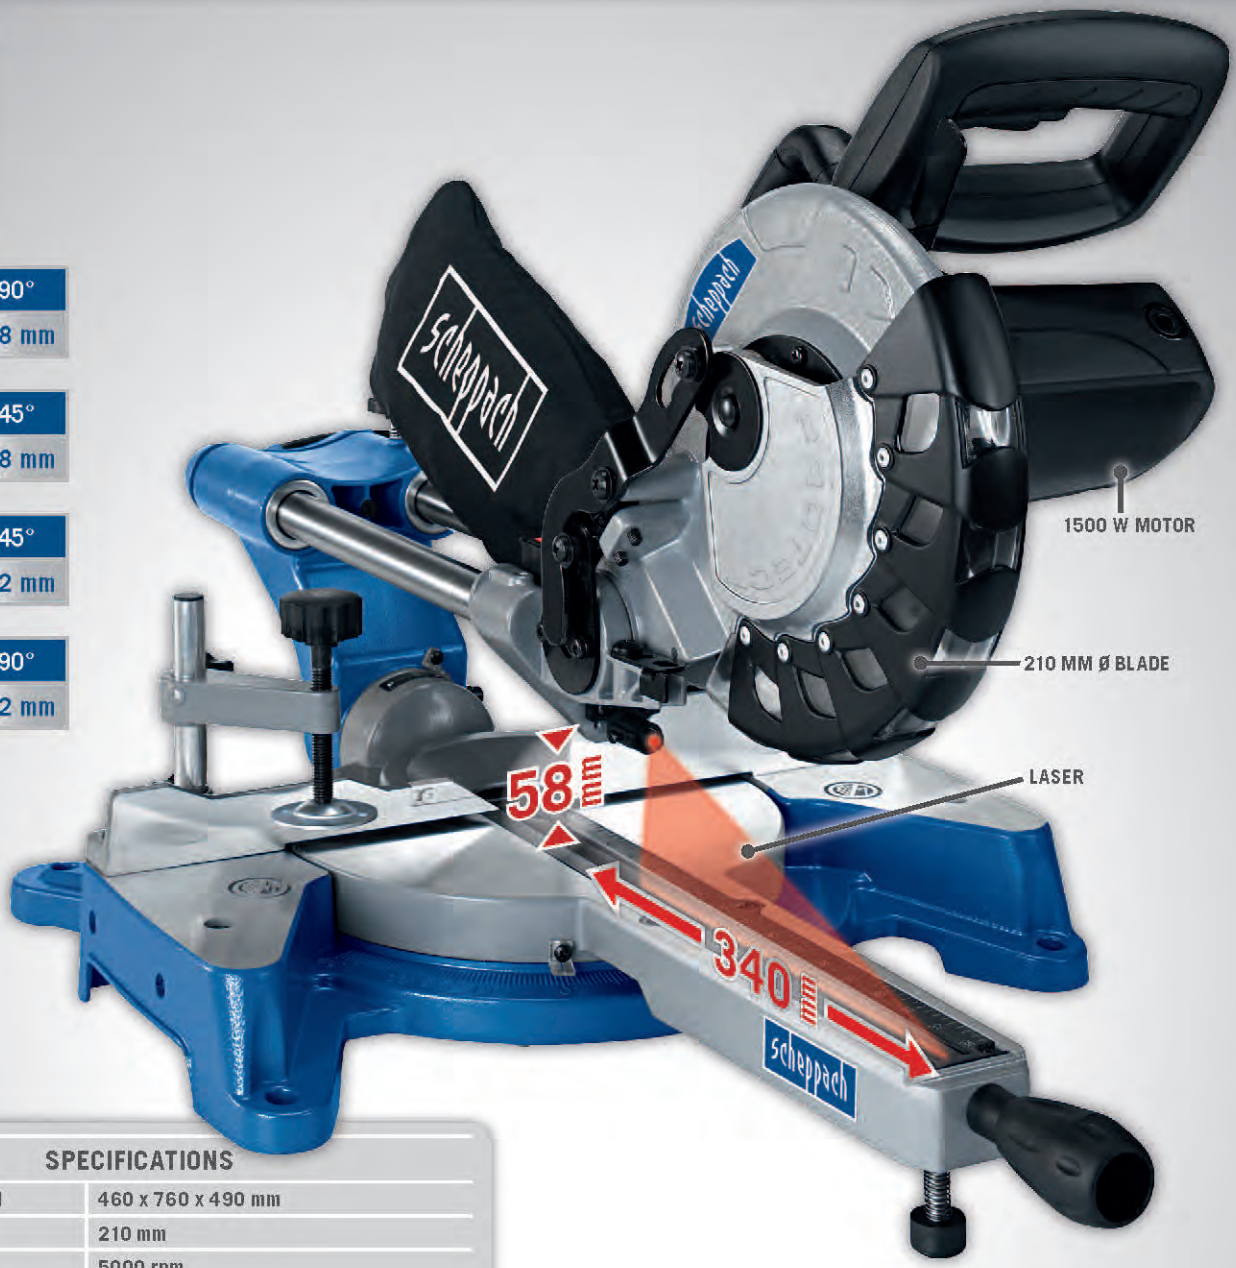

SPECIFICATIONS

Dimensions L x W x H	460 x 760 x 490 mm
Blade Ø	210 mm
Blade speed	5000 rpm
Turntable Ø	250 mm
Bevel type	1 x 45°
Mitre capacity	45° left / -45° right
Cross cut at 90°	340 x 58 mm
Mitre cut at 45°	240 x 58 mm
Bevel cut at 45°	340 x 32 mm
Compound cut at 45°	240 x 32 mm
Motor	220 – 240 V~
Input	1500 W

LOGISTICAL DATA

Weight net / gross	13 / 16 kg
Packaging dimensions	810 x 460 x 355 mm
Order No	5901201901
Barcode	4014915081487
20 Container	210 pcs
40 Container	430 pcs
40 HQ Container	500 pcs



HM80LXU | 8" SLIDING MITRE SAW

THE "SCHEPPACH HM80LXU" SLIDING COMPOUND MITRE SAW IS PERFECT FOR GENERAL DAILY DIY USE. IDEAL FOR MITRE, BEVEL AND COMPOUND ANGLE CUTS, THIS COMPOUND MITRE SAW FROM SCHEPPACH FEATURES A DUAL SLIDE RAIL. DESIGNED TO BE VERSATILE IN APPLICATION, IT ACCURATELY AND PRECISELY CUTS PROCESSED TIMBERS, PLASTIC, HARD AND SOFT WOOD.

- Lightweight die cast aluminium design for easy transport
- Powerful 1500 W motor provides various cutting applications
- Compact bench top design fits conveniently in small workshop environments
- Die cast aluminium table for long-lasting durability
- The 24 tooth carbide tipped blade stays sharp and makes clean cuts
- Standard laser provides high visibility for precision cutting
- Big cross cutting width up to 340 mm
- Fully enclosed blade guard for operator safety

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23

360°









SPECIFICATIONS

Dimensions L x W x H	735 x 593 x 505 mm
Blade Ø	216 mm
Blade speed	4700 rpm
Turntable Ø	248 mm
Bevel type	1 x 45°
Bevel type	45° left
Cross cut at 90°	340 x 65 mm
Mitre cut at 45°	240 x 65 mm
Bevel cut at 45°	340 x 38 mm
Compound cut at 45°	240 x 38 mm
Motor	220 – 240 V~
Input	2000 W

LOGISTICAL DATA

Weight net / gross	12 / 14.6 kg
Packaging dimensions	790 x 460 x 355 mm
Order No	5901215903
Barcode	4046664072560
20 Container	210 pcs
40 Container	450 pcs
40 HQ Container	524 pcs



HM216 | 8" SLIDING MITRE SAW

THE "SCHEPPACH HM216" SLIDING COMPOUND MITRE SAW IS PERFECT FOR GENERAL DAILY DIY USE. IDEAL FOR MITRE, BEVEL AND COMPOUND ANGLE CUTS, THIS COMPOUND MITRE SAW FROM SCHEPPACH FEATURES A DUAL SLIDE RAIL. DESIGNED TO BE VERSATILE IN APPLICATION, IT ACCURATELY AND PRECISELY CUTS PROCESSED TIMBERS, PLASTIC, HARD AND SOFT WOOD.

- Lightweight die cast aluminium design for easy transport
- Powerful 2000 W motor provides various cutting applications
- Compact bench top design fits conveniently in small shop environments
- Die cast aluminium table for long-lasting durability
- The 24 tooth carbide tipped blade stays sharp and makes clean cuts
- Standard laser provides high visibility for precision cutting
- Cross cutting width up to 340 mm
- Fully enclosed blade guard for operator safety

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23







90° / 90°
340 x 90 mm



90° / 45°
240 x 90 mm



45° / 45°
240 x 45 mm



45° / 90°
340 x 45 mm

SPECIFICATIONS

Dimensions L x W x H	770 x 595 x 590 mm
Blade Ø	255 mm
Blade speed	4500 rpm
Turn table Ø	248 mm
Bevel type	1 x 45°
Mitre capacity	45° left
Cross cut at 90°	340 x 90 mm
Mitre cut at 45°	240 x 90 mm
Bevel cut at 45°	340 x 45 mm
Compound cut at 45°	240 x 45 mm
Motor	220 – 240 V~ / 50 Hz
Input	2000 W

LOGISTICAL DATA

Weight net / gross	14.3 / 17.5 kg
Packaging dimensions	815 x 480 x 405 mm
Order No	5901216942
Barcode	4046664079088
20 Container	155 pcs
40 Container	330 pcs
40 HQ Container	396 pcs



HM254 | 10" SLIDING MITRE SAW

THE "SCHEPPACH HM254" SLIDING COMPOUND MITRE SAW IS PERFECT FOR GENERAL DAILY DIY USE. IDEAL FOR MITRE, BEVEL AND COMPOUND ANGLE CUTS, THIS COMPOUND MITRE SAW FROM SCHEPPACH FEATURES A DUAL SLIDE RAIL. DESIGNED TO BE VERSATILE IN APPLICATION, IT ACCURATELY AND PRECISELY CUTS PROCESSED TIMBERS, PLASTIC, HARD AND SOFT WOOD.

- Lightweight die cast aluminium design for easy transport
- Powerful 2000 W motor provides various cutting applications
- Compact bench top design fits conveniently in small shop environments
- Die cast aluminium table for long-lasting durability
- The 60 teeth carbide tipped blade stays sharp and makes clean cuts
- Standard laser provides high visibility for precision cutting
- Big cross cutting width up to 340 mm
- Fully enclosed blade guard for operator safety

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23



90° / 90°
340 x 78 mm



90° / 45°
240 x 78 mm



45° / 45°
240 x 42 mm



45° / 90°
340 x 42 mm

360°



SPECIFICATIONS

Dimensions L x W x H	810 x 460 x 395 mm
Blade Ø	254 mm
Blade speed	5000 rpm
Turntable Ø	250 mm
Bevel type	1 x 45°
Mitre capacity	45° left / -45° right
Cross cut at 90°	340 x 78 mm
Mitre cut at 45°	240 x 78 mm
Bevel cut at 45°	340 x 42 mm
Compound cut at 45°	240 x 42 mm
Motor	220 – 240 V~
Input	2000 W

LOGISTICAL DATA

Weight net / gross	15.7 / 18.8 kg
Packaging dimensions	810 x 460 x 395 mm
Order No	5901202901
Barcode	4014915081494
20 Container	180 pcs
40 Container	370 pcs
40 HQ Container	435 pcs



HM100LXU | 10" SLIDING MITRE SAW

BUILT TO EXCEPTIONALLY HIGH STANDARDS, THE SCHEPPACH HM100LXU COMPOUND MITRE SAW IS A VERSATILE MACHINE, IDEAL FOR DAILY DIY AND WORKSHOP USE. PERFECT FOR MITRE, BEVEL AND COMPOUND ANGLE CUTS, THIS COMPOUND MITRE SAW FROM SCHEPPACH FEATURES A DUAL SLIDE RAIL. DESIGNED TO BE VERSATILE IN APPLICATION, IT ACCURATELY AND PRECISELY CUTS PROCESSED TIMBERS, PLASTIC, HARD AND SOFT WOOD.

- Lightweight die cast aluminium design for easy transport
- Powerful 2000 W motor provides various cutting applications
- Compact bench top design fits conveniently in small workshop environments
- Die cast aluminium table for long-lasting durability
- The 60 tooth carbide tipped blade stays sharp and makes clean cuts
- Standard laser provides high visibility for precision cutting
- Cross cut capacity up to 340 mm

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23

DOUBLE BEVEL







90° / 90°
340 x 90 mm




45° / 45°
240 x 55 mm



90° / 45°
240 x 90 mm



45° / 90°
340 x 55 mm

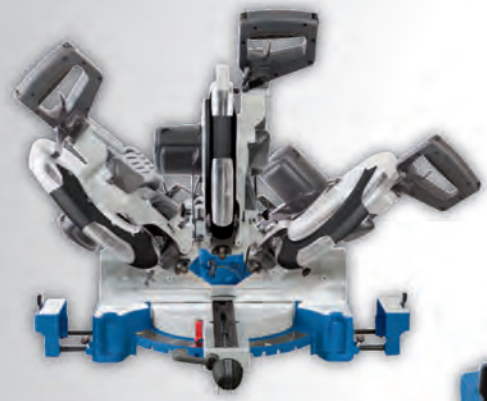

SPECIFICATIONS

Dimensions L x W x H	920 x 700 x 460 mm
Blade Ø	305 mm
Blade speed	4200 rpm
Bevel type	2 x 45°
Mitre capacity	47° left / -47° right
Mitre slots	45-31.6-22.5-0-22.5-31.6-45°
Cross cut at 90°	340 x 90 mm
Mitre cut at 45°	240 x 90 mm
Bevel cut at 45°	340 x 55 mm
Compound cut at 45°	240 x 55 mm
Motor	230 V~
Input	2000 W

LOGISTICAL DATA

Weight net / gross	23 / 25 kg
Packaging dimensions	970 x 500 x 540 mm
Order No	3901216901
Barcode	4046664036784
20 Container	90 pcs
40 Container	192 pcs
40 HQ Container	240 pcs



HM120L | 12" DOUBLE BEVEL


THE NEW SCHEPPACH 12" MITRE SAW IS PERFECT FOR A WIDE RANGE OF CUTTING JOBS. SUITABLE FOR BOTH CASUAL WOODWORKERS AND PROFESSIONALS ALIKE. THIS SAW IS IDEAL FOR CUTTING LAMINATE FLOORING, FLOOR BOARDS, DECKING AND OTHER WOODEN ITEMS. ALSO SUITABLE FOR CUTTING COATED PANELS AND PLASTICS TOO. POWERFUL, LIGHT AND EXTREMELY EASY TO USE, THIS MITRE SAW IS A GREAT SAW TO HAVE.

- Offering bevel cuts in both directions, this 12" Sliding Compound Mitre Saw helps you maximize your productivity
- 12" (305 mm) blade for great cutting capacity
- Cuts up to 340 mm in width and 90 mm height
- Dual horizontal steel rails with linear ball bearings deliver an accurate, durable and compact saw
- Mitres 47-degrees to the right and 47-degrees to the left providing increased capacity
- Precise mitre system and machined base fence support optimises durability and cutting accuracy
- Compact, lightweight design allows for easy transport and storage
- Exact line laser alignment system makes it easy to align the blade with the cut line

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23

DOUBLE BEVEL

360°

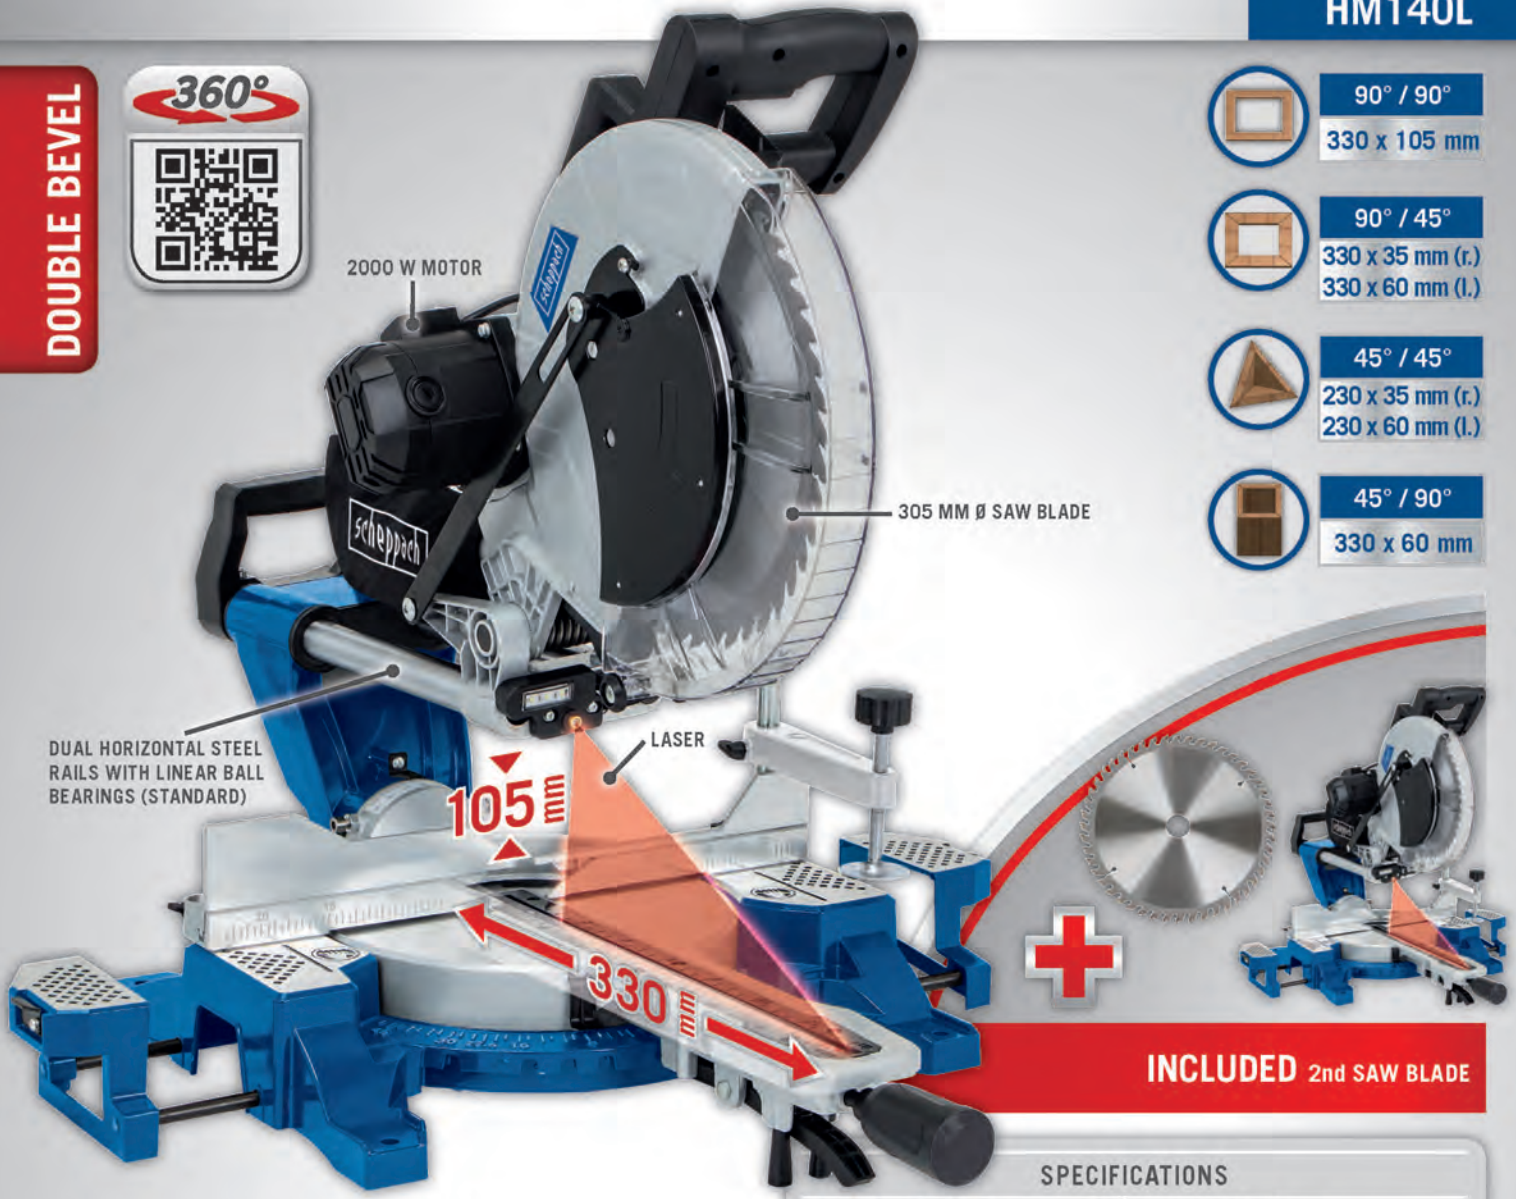

90° / 90°	330 x 105 mm
90° / 45°	330 x 35 mm (r.) 330 x 60 mm (l.)
45° / 45°	230 x 35 mm (r.) 230 x 60 mm (l.)
45° / 90°	330 x 60 mm

HM140L | 305 MM SLIDING COMPOUND MITRE SAW

THE SCHEPPACH SLIDING COMPOUND MITRE SAW HM140L COMES WITH A LARGE 305 MM HW SAW BLADE, ALLOWING A CUTTING HEIGHT OF 105 MM AND A CUTTING WIDTH OF 330 MM. THE MITRE SAW IS ALSO EQUIPPED WITH A DOUBLE-BEVEL SAWING HEAD AND A TURNTABLE FOR THE MOST DEMANDING CHALLENGES. THE HM140L ALSO FEATURES A 2000W MOTOR FOR EXCELLENT RESULTS IN BOTH SOFT AND HARDWOOD AND A BUILT-IN LASER FOR PRECISE CUTTING AT ANY TIME.

- Double bevel sawing head for great cutting results
- Turntable rotating -45° to +45°
- Dual horizontal steel rails with linear ball bearing for precise cuts
- Stop fence
- Lightweight (20.8 kg) construction for easy transportation and storage
- Built-in precision laser
- 305 mm HW saw blade for flawless cuts
- 340 mm cutting width and 105 mm cutting height
- Saw blade guard for enhanced security

SPECIFICATIONS

Dimensions L x W x H	890 x 615 x 490 mm
Blade Ø	305 mm
Blade speed	3800 rpm
Bevel type	2 x 45°
Mitre capacity	45° left / -45° right
Mitre slots	45-31.6-22.5-0-22.5-31.6-45°
Cross cut at 90° / 90°	330 x 105 mm
Mitre cut at 90° / 45°	330 x 35 mm (r.) 330 x 60 mm (l.)
Bevel cut at 45° / 90°	330 x 60 mm
Compound cut at 45° / 45°	230 x 35 mm (r.) 230 x 60 mm (l.)
Motor	230 – 240 V~ / 50 Hz
Input	2000 W

LOGISTICAL DATA

Weight net / gross	20.8 / 26.3 kg
Packaging dimensions	940 x 545 x 560 mm
Order No	5901218901
Barcode	4046664072843
20 Container	89 pcs
40 Container	220 pcs
40 HQ Container	260 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23

360°



SPECIFICATIONS

Dimensions L x W x H	568 x 574 x 535 mm
Blade Ø	216 mm
Blade speed	3800 / 5000 rpm
Turntable Ø	260 mm
Bevel type	1 x 45°
Mitre capacity	47° left / -47° right
Cross cut at 90°	305 x 65 mm
Mitre cut at 45°	215 x 65 mm
Bevel cut at 45°	305 x 36 mm
Compound cut at 45°	215 x 36 mm
Motor	230 – 240 V~
Input	1700 W

LOGISTICAL DATA

Weight net / gross	12.2 / 14.4 kg
Packaging dimensions	790 x 460 x 355 mm
Order No	5901207901
Barcode	4046664030843
20 Container	210 pcs
40 Container	450 pcs
40 HQ Container	520 pcs



HM80MP | 8" SLIDING MITRE SAW

SCHEPPACH HM80MP – 8" MULTIPURPOSE SLIDING MITRE SAW WHICH CUTS HARDWOOD, SOFTWOOD, PLASTIC, COPPER, ALUMINIUM, WOOD (EVEN WOOD WITH NAILS) AND STEEL USING JUST ONE BLADE.

- Slide compound saw with 305 x 65 mm cutting capacity
- 2 speeds for multipurpose application – 3800 / 5000 rpm
- Includes multipurpose TCT blade (Ø 216 mm / 40 teeth)
- Light weight owing to compact die-cast aluminium construction
- Dual slide rail system with linear bearings allows for accurate operation
- Hold-down clamp provides work piece stability during mitre, bevel and compound cuts
- Tall, die-cast aluminium fence gives support during setup and cutting
- Two quick release die cast alloy sliding base extensions
- The powerful 1700 W motor provides user with constant torque
- Built in laser provides user with work piece illumination
- Durable die-cast aluminium saw blade cover
- Quick Lock system. Adjust your angle cuts with precision in 2 clicks.

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23



TWO SPEEDS




ONE BLADE



ONE SAW



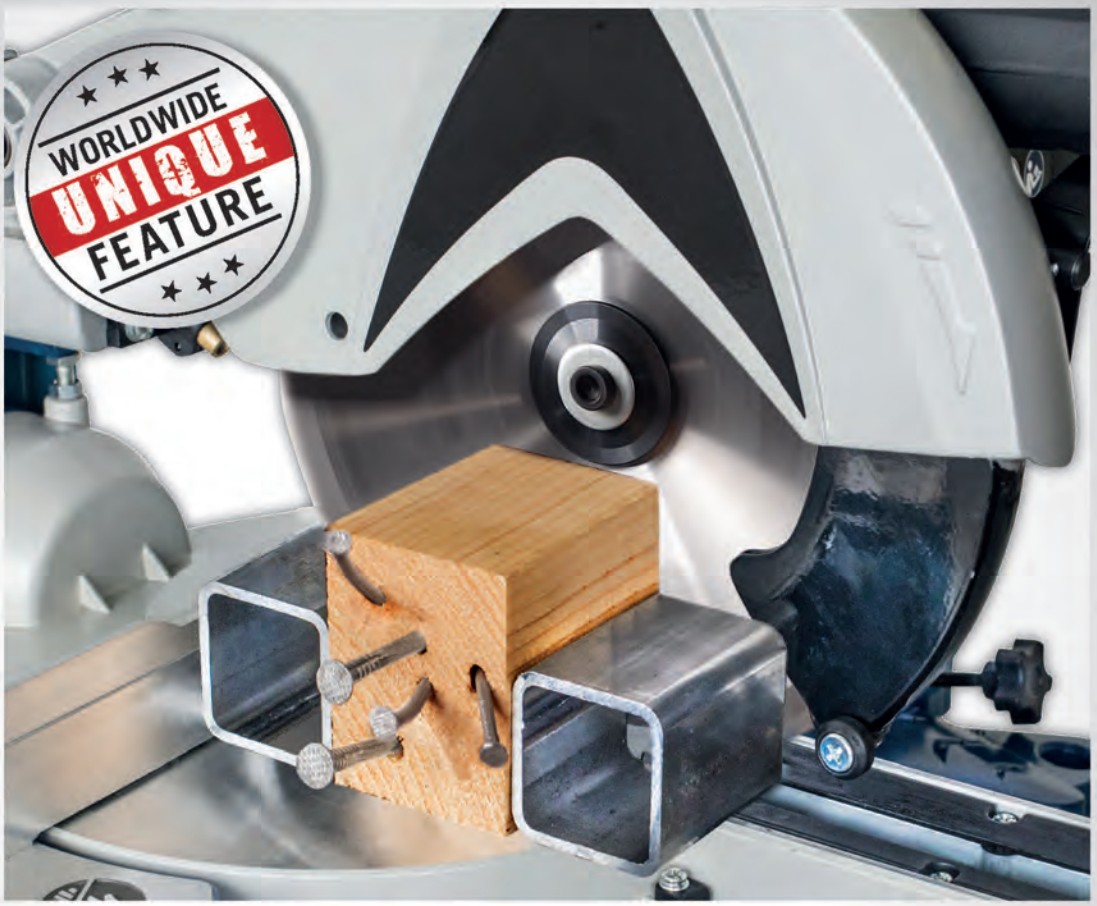

SOFTWOOD & HARDWOOD



ALUMINIUM



STEEL



EVEN WOOD WITH NAILS



PLASTIC



COPPER



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23



SPECIFICATIONS

Dimensions L x W x H	585 x 800 x 610 mm
Blade Ø	255 mm
Blade speed	3200 / 4500 rpm
Turntable Ø	260 mm
Bevel type	1 x 45°
Mitre capacity	47° left / -47° right
Cross cut at 90°	305 x 90 mm
Mitre cut at 45°	215 x 90 mm
Bevel cut at 45°	305 x 47 mm
Compound cut at 45°	215 x 47 mm
Motor	230 – 240 V~
Input	2150 W

LOGISTICAL DATA

Weight net / gross	16.5 / 17.9 kg
Packaging dimensions	810 x 495 x 380 mm
Order No	5901208901
Barcode	4046664031383
20 Container	192 pcs
40 Container	390 pcs
40 HQ Container	450 pcs



HM100MP | 10" SLIDING MITRE SAW

THE SCHEPPACH "HM100MP" IS THE MOST ADVANCED SLIDING COMPOUND MITRE SAW IN THE MARKET TODAY. CUTS HARDWOOD, SOFTWOOD, PLASTIC, COPPER, ALUMINIUM, WOOD (EVEN WOOD WITH NAILS) AND STEEL USING JUST ONE BLADE.

- Slide compound saw with 305 x 90 mm cutting capacity
- 2 speeds for multipurpose application – 3200 / 4500 rpm
- Includes multipurpose TCT blade (Ø 255 mm / 48 teeth)
- Light weight owing to compact die-cast aluminium construction
- Dual slide rail system with linear bearings allows for accurate operation
- Hold-down clamp provides work piece stability during mitre, bevel and compound cuts
- Tall, die-cast aluminium fence gives support during setup and cutting
- Two quick release die cast alloy sliding base extensions
- The powerful 2150 W motor provides user with constant torque
- Built in laser provides user with work piece illumination
- Durable die-cast aluminium saw blade cover

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23












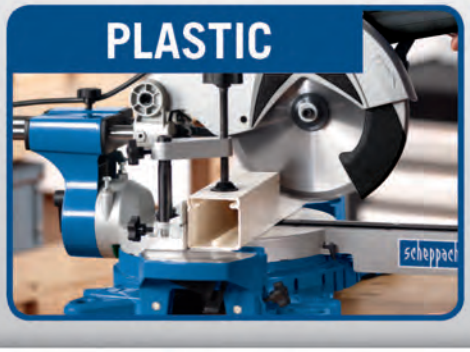



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23

HM90SL | 8.5" SLIDING MITRE SAW

THE SCHEPPACH HM90L SLIDING MITRE SAW IS THE IDEAL TOOL WHEN YOU HAVE LESS SPACE AND STILL WANT TO HAVE A HIGH CLASS AND MULTIFUNCTIONAL SLIDING MITRE SAW. THE NOVEL GUIDANCE SYSTEM ON FIXED RAILS ALLOWS POSITIONING RIGHT ALONGSIDE WALLS BECAUSE THE MACHINE DOESN'T NEED ANY SPACE BEHIND IT FOR EFFECTIVE WORKING.

- Big cross cut capacity up to 300 mm
- The high cutting speed allows precise cuts without splintering of the material
- Space-saving through fixed guiding rails
- Lightweight high quality alloy housing
- Powerful 2200W Motor
- Build in Laser for precise display of the cut edge
- Mitres from -47°to +47°for efficient working
- Build-in LED for lighting of the work area
- Extra-long, blue power cable (5 m)

LED

90° / 90°
300 x 65 mm

90° / 45°
200 x 65 mm

45° / 45°
200 x 38 mm

45° / 90°
300 x 38 mm

360°



SPECIFICATIONS

Dimensions L x W x H	680 x 520 x 350 mm
Blade Ø	Ø 216 mm / 30 mm
Blade speed	5200 rpm
Turntable Ø	225 mm
Bevel type	1 x 45°
Mitre capacity	47° left/ - 47° right
Diameter extraction connection	32 mm
Cross cut at 90° / 90°	300 x 65 mm
Cross cut at 90° / 45°	200 x 65 mm
Cross cut at 45° / 90°	300 x 38 mm
Cross cut at 45° / 45°	200 x 38 mm
Mitre slots	0-15-22.5-31.6-45°
Motor	220 – 240 V~
Input	2200 W

INCLUDED
2nd BLADE & 5 M BLUE POWER CABLE

LOGISTICAL DATA

Weight net / gross	13 / 16 kg
Packaging dimensions	605 x 400 x 395 mm
Order No	5901214901
Barcode	4046664069119
20 Container	288 pcs
40 Container	588 pcs
40 HQ Container	620 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23

HM80MP

	Description	Order Numbers	Barcode
1 **Multi-function saw blade** Hard & Softwood, Laminate, Non-Ferrous, Plastic	Ø 216 x 30 x 2.8 mm / 40 T	7901200701	4014915088806
2 **Multi-function saw blade professional** Hard & Softwood, Laminate, Non-Ferrous, Plastic, Steel	Ø 216 x 30 x 1.8 mm / 40 T	7901200703	4014915089131



HM100MP / HM100LXU

	Description	Order Numbers	Barcode
1 **Multi-function saw blade** Hard & Softwood, Laminate, Non-Ferrous, Plastic for HM100MP	Ø 255 x 30 x 2.8 mm / 48 T	7901200702	4014915088813
2 **Multi-function saw blade professional** Hard & Softwood, Laminate, Non-Ferrous, Plastic, Steel for HM100MP	Ø 255 x 30 x 2.2 mm / 48 T	7901200704	4014915089568
3 **Saw blade for wood** Hard & Softwood, Laminat	Ø 255 x 30 x 2.8 mm / 48 T	7901200706	4014915091325



HM90SL

	Description	Order Numbers	Barcode
1 **Saw blade** Hard & Softwood, Laminate	Ø 216 x 30 x 2.8 mm / 48 T	7901200705	4046664031642



HM120L

	Description	Order Numbers	Barcode
1 **Saw blade** Hard & Softwood, Laminate	Ø 305 x 30 x 3.0 mm / 60 T	7901200707	4046664037552



HM140L

	Description	Order Numbers	Barcode
1 **Saw blade** Hard & Softwood, Laminate	Ø 305 x 30 x 3.0 mm / 24 T	7901201705	4046664073277



HM216

	Description	Order Numbers	Barcode
1 **Saw blade** Hard & Softwood, Laminate	Ø 216 x 30 x 2.8 mm / 24 T	7901101602	4046664072737
2 **Saw blade** Hard & Softwood, Laminate	Ø 216 x 30 x 2.8 mm / 40 T	7901201705	4014915088806
3 **Saw blade** Hard & Softwood, Laminate	Ø 216 x 30 x 2.8 mm / 48 T	7901200705	4046664031642



3 SAW BLADE SET


210 mm

	Description	Order Number	Barcode
TCT saw blades for HM80LXU	Ø 210 x 30 / 25,4 x 2,2 mm / 24 T	7901200715	4046664041405
	Ø 210 x 30 / 25,4 x 2,2 mm / 48 T		
	Ø 210 x 30 / 25,4 x 2,2 mm / 60 T		






Ideal for cutting compounds woods, melamine or laminate. Intensive use on all wood. Universal blade for trimming and cutting of hardwoods.



Standard Works and finishing wood, chipboard, laminate and PVC.



Special for aluminium and non-ferrous metals cutting. Thin wood slicing.




2 SAW BLADE SET

254 mm

	Description	Order Number	Barcode
TCT saw blades for HM100MP, HM100LXU and HM100T	Ø 254 x 30 / 25,4 x 2,8 mm / 48 T	7901200714	4046664041399
	Ø 254 x 30 / 25,4 x 2,8 mm / 60 T		






Standard Works and finishing wood, chipboard, laminate and PVC.



Special for aluminium and non-ferrous metals cutting. Thin wood slicing.

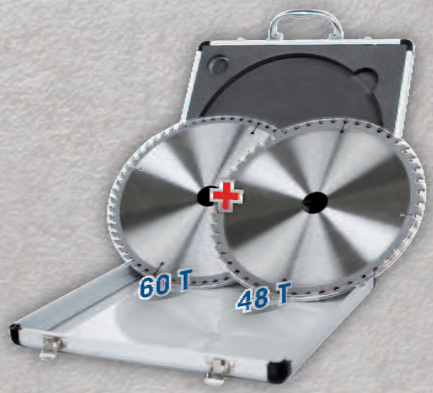


2 SAW BLADE SET

315 mm

	Description	Order Number	Barcode
TCT saw blades	Ø 315 x 30 / 25,4 x 2,8 mm / 24 T	7901200716	4046664042402
	Ø 315 x 30 / 25,4 x 2,8 mm / 48 T		





Standard Works and finishing wood, chipboard, laminate and PVC.



Special for aluminium and non-ferrous metals cutting. Thin wood slicing.



FAST AND EASY CLAMPING

300 kg









SPECIFICATIONS

Dimensions L x W x H	960 x 877 x 860 mm
Stand height	860 mm
Clamping force	1000 kg
Max. clamping range	955 mm
Max. load capacity	300 kg

LOGISTICAL DATA

Weight net / gross	14.5 / 17 kg
Packaging dimensions	840 x 340 x 370 mm
Order No	5907303900
Barcode	4046664072416
20 Container	275 pcs
40 Container	495 pcs
40 HQ Container	630 pcs

SB1000 | MULTIPURPOSE WORKSTATION

THIS PORTABLE WORKSTATION IS THE TOOL YOU CAN TAKE RIGHT TO THE JOB - INDOORS, OUTDOORS, ON CONSTRUCTION SITES OR THE FACTORY FLOOR.

- Fast and easy clamping
- 1 ton clamping force provided by the jaws
- A lock-release switch locks materials in place and easily releases with the flick of a switch
- Quickly folds down (no tools needed)
- Foot pedal lever creates a hands-free portable work station
- Hands-free operation make it easy to clamp and hold your work pieces
- Heavy duty construction can take a real hammering
- You can clamp anything from thin sheet metal to a door lying flat
- Heavy duty, all-steel construction

SUITABLE FOR MORE THAN 95% OF ALL MITRE SAWS

MULTI APP

UMF1550

150 kg









UMF1550 / UMF1600 / UMF2000 STAND

WITH THEIR LIGHTWEIGHT CONSTRUCTION,THE SCHEPPACH UMF1550, UMF1600 OR UMF2000 MITRE SAW STANDS ALLOW YOU TO SUPPORT NEARLY ALL BRANDS OF MITRE SAWS.

- Made from lightweight steel for simple transportation
- Work stops are adjustable for your convenience
- Compact design allows easy transport and storage
- Tool mounting brackets allow easy and secure mounting of mitre saw to stand
- Legs provide superior support and fold for easy storage
- Universal design works with nearly all brands of mitre saws
- They support loads of up to 150 kg
- 0.93 m beam extends to support work up to 1.94 m (UMF1550)
- 1.0 m beam extends to support work up to 1.65 m (UMF1600)
- 1.16 m beam extends to support work up to 2.0 m (UMF2000)

SPECIFICATIONS	
Dimensions L x W x H	935 – 1945 x 545 x 805 – 915 mm
Stand height	915 mm
Beam extension	935 – 1945 mm
Max. load capacity	150 kg


LOGISTICAL DATA	
Weight net / gross	9.8 / 10.8 kg
Packaging dimensions	910 x 250 x 150 mm
Order No	5907107900
Barcode	4046664040521
20 Container	850 pcs
40 Container	1750 pcs
40 HQ Container	1950 pcs



UMF1600

200 kg



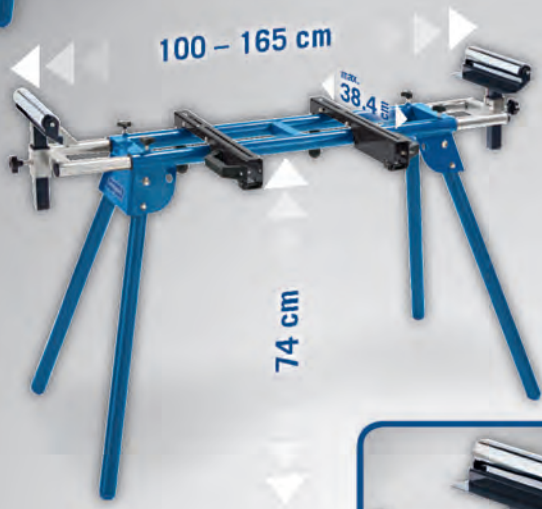



UMF2000

250 kg







SPECIFICATIONS	
Dimensions L x W x H	1000 x 580 x 810 mm
Stand height	810 mm
Beam extension	1000 – 1650 mm
Max. load capacity	200 kg

LOGISTICAL DATA	
Weight net / gross	12.3 / 14.9 kg
Packaging dimensions	1050 x 295 x 210 mm
Order No	5907103900
Barcode	4046664031888
20 Container	470 pcs
40 Container	965 pcs
40 HQ Container	1070 pcs



SPECIFICATIONS	
Dimensions L x W x H	1250 x 632 x 900 mm
Stand height	900 mm
Beam extension	1160 – 2000 mm
Max. load capacity	250 kg

LOGISTICAL DATA	
Weight net / gross	13.5 / 15 kg
Packaging dimensions	1240 x 290 x 200 mm
Order No	5907102900
Barcode	4046664031499
20 Container	410 pcs
40 Container	860 pcs
40 HQ Container	960 pcs





- Chop saw
- Table saw
- Mitre saw

3 IN 1

360°

HM100T | 10" TABLE MITRE SAW

THIS INNOVATIVE SAW FROM SCHEPPACH IS A COMBINATION OF THREE SAW TYPES IN ONE MACHINE: CHOP SAW, MITRE SAW AND TABLE SAW. IT TURNS IN A FEW SECONDS FROM CROSS CUT SAW INTO A BENCH TOP CIRCULAR SAWING MACHINE.

- Lightweight die cast aluminium design for easy transport
- Powerful 1800 W motor provides various cutting applications
- Compact bench top design fits conveniently in small workshop environments
- The 60 tooth, carbide tipped blade stays sharp and makes clean cuts
- Torsion resistant design and top quality construction
- Featuring two modes: mitre saw and table saw, making it suitable for a variety of cutting applications

SPECIFICATIONS

Dimensions L x W x H	730 x 465 x 630 mm
Blade Ø	254 mm
Blade speed	5000 rpm
Cutting width – cross cutting 90 / 90°	110 / 70 mm
Cutting depth – cross cutting 90 / 45°	70 / 70 mm
Cutting height – table mode 90°	46 mm
Table size	460 x 335 mm
Motor	220 – 240 V~
Input	1800 W

LOGISTICAL DATA

Weight net / gross	19 / 24 kg
Packaging dimensions	660 x 580 x 410 mm
Order No	5901103901
Barcode	4046664031864
20 Container	170 pcs
40 Container	360 pcs
40 HQ Container	440 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 23



SPECIFICATIONS

Dimensions L x W x H	525 x 400 x 400 mm
Saw blade Ø	210 mm
Table size	525 x 400 mm
Cutting depth at 90°	48 mm
Cutting depth at 45°	45 mm
Motor	230 – 240 V~
Input	1200 W

LOGISTICAL DATA

Weight net / gross	14 / 16 kg
Packaging dimensions	580 x 455 x 340 mm
Order No	5901302901
Barcode	4014915080077
20 Container	300 pcs
40 Container	600 pcs
40 HQ Container	700 pcs



HS80 | 8" TABLE SAW

THIS IS A RATHER NEAT TABLE SAW, DESIGNED FOR MAXIMUM MOBILITY AND MINIMUM STORAGE SPACE REQUIREMENTS. A COMPACT YET POWERFUL TABLE SAW FOR THE DIY HOME WOODWORKER, WELL ABLE TO CUT ALL TYPES OF WOOD ACCURATELY AT VARIOUS ANGLES.

- Powerful 1200 Watt motor
- Foldable extension table enables easy adjustment of the table size to suit the application and workpiece
- Max cutting depths – 48 mm
- Blade Spec: TCT blade
- Includes carbide tipped blade
- Includes safety blade guard, mitre gauge and rip fence

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 36



HS100S | 10" TABLE SAW

A TABLE SAW IS A KEY TOOL FOR ANY WOODWORKER OR CARPENTER. THE FEATURES AND EASE-OF-USE OF THE SCHEPPACH HS100S TABLE SAW MAKES IT IDEAL FOR VARIOUS SKILL LEVELS AND APPLICATIONS.

- Powerful 2000 Watt motor
- Left and right extension tables enable easy adjustment of the table size to suit the application and workpiece
- Leg stand included as standard
- Max cutting depth 85 mm
- Blade Spec: TCT blade 250 mm (10") diameter
- Includes carbide tipped blade
- Dual bevel and height adjustment control knob
- Includes safety blade guard, mitre gauge and rip fence

SPECIFICATIONS

Dimensions L x W x H	940 x 642 x 830 mm
Saw blade Ø	250 x 30 mm
Table size	642 x 485 mm
Table size with extension	642 x 940 mm
Table height	830 mm
Cutting depth at 90°	85 mm
Cutting depth at 45°	65 mm
Motor	220 – 240 V~
Input	2000 W

LOGISTICAL DATA

Weight net / gross	20 / 22.5 kg
Packaging dimensions	700 x 560 x 330 mm
Order No	5901310901
Barcode	4046664037637
20 Container	224 pcs
40 Container	462 pcs
40 HQ Container	512 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 36





360°

INCLUDED TABLE WIDTH EXTENSIONS

HS110 | 254 MM TABLE SAW

THE TABLE SAW HS110 IS A POWERFUL TOOL FOR DIY ENTHUSIASTS AND CRAFTSMEN. THE MACHINE IS SUITABLE FOR DIFFERENT APPLICATIONS.

- Powerful 2000 Watt Motor
- Table width extension on both sides for cutting large workpieces
- Base unit included
- Max. cutting height up to 83 mm
- Ø 254 mm HW saw blade
- Bevel and cutting height adjustable via handwheel
- Saw blade guard, mitre gauge and rip fence included

SPECIFICATIONS

Dimensions L x W x H	930 x 669 x 1025 mm
Saw blade Ø	254 x 30 mm
Table size	430 x 626 mm
Table size with extension	930 x 626 mm
Table Height	885 mm
Cutting depth at 90°	83 mm
Cutting depth at 45°	57 mm
Motor	230 V~ / 50 Hz
Input	2000 W

LOGISTICAL DATA

Weight net / gross	23 / 25 kg
Packaging dimensions	676 x 562 x 372 mm
Order No	5901312901
Barcode	4046664069744
20 Container	192 pcs
40 Container	408 pcs
40 HQ Container	476 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 36

PROFESSIONAL



Scheppach HS 105
Einstiegsklasse
Heimwerker Praxis 6/2018
Preis/Leistung: gut
1,7

HS105 | 10" TABLE SAW

THE SCHEPPACH 10" TABLE SAW WITH STAND IS THE TOP UNIT IN ITS CLASS. THIS SAW IS PERFECT FOR BOTH THE CONTRACTOR AND THE HOMEOWNER. THE TABLE SAW COMES FULLY EQUIPPED WITH ALL OF THE LATEST FEATURES. WHETHER YOU ARE FRAMING A NEW HOME OR BUILDING A WOOD SHED, THE SCHEPPACH 10" TABLE SAW IS THE MOST CONVENIENT TABLE SAW ON THE MARKET.

- Powerful 2000 Watt motor
- Pull-out table width extension for enhanced stability when cutting large workpieces
- Crosscutting mitre gauge
- Base unit included
- Max cutting depth: 75 mm
- Professional quality aluminium rails for increased extension stability
- 2in1 hand wheel for quick height and micro-bevel adjustments
- T-slot mitre gauge provides additional capacity for cross-cutting
- Includes safety blade guard, mitre gauge and rip fence
- On board storage for included accessories

360°





SPECIFICATIONS

Dimensions L x W x H	920 x 720 x 1080 mm
Saw blade Ø	255 mm
Table size with extension	640 x 920 mm
Cutting depth at 90°	75 mm
Cutting depth at 45°	50 mm
Motor	220 – 240 V~
Input	2000 W

LOGISTICAL DATA

Weight net / gross	32 / 35.2 kg
Packaging dimensions	760 x 760 x 370 mm
Order No	5901308901
Barcode	4046664034988
20 Container	126 pcs
40 Container	270 pcs
40 HQ Container	315 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 36

PROFESSIONAL



360°

SPECIFICATIONS

Dimensions L x W x H	1110 x 600 x 1050 mm	
Motor speed	2800 rpm	
Saw blade Ø	315 mm	
Table size	800 x 550 mm	
Table height	800 mm	
Cutting depth at 90°	83 mm	
Cutting depth at 45°	49 mm	
Motor	230 V~	400 V
Input	2200 W	2800 W

LOGISTICAL DATA

Weight net / gross	41 / 48.5 kg (230 V~)	46 / 51.5 kg (400 V)
Packaging dimensions	880 x 610 x 450 mm	
Order No	3901302915 (230 V~)	3901302920 (400 V)
Barcode	4046664004929	4046664004936
20 Container	110 pcs	
40 Container	225 pcs	
40 HQ Container	225 pcs	

HS120o | 12" TABLE SAW

IDEAL FOR SAWING SOLID TIMBERS, BOARDS AND OTHER WOODLIKE MATERIALS IN THE WORKSHOP AND ON THE CONSTRUCTION SITES. THESE TYPES OF SAW BENCHES REPRESENT AMAZING VALUE FOR MONEY. THEIR GENEROUS SPECIFICATION FULFILLS YOUR REQUIREMENTS FOR RIPPING, CROSSCUTTING, ANGLE AND COMPOUND ANGLE CUTS.

- Powerful 2800 Watt (2200 W – 230 V~) induction motor
- Sturdy, powder-coated sheet steel design and galvanized table-top
- Table length extension (could be used also as table width extension)
- Suction guard with suction hose
- Height adjustment of saw blade continuously adjustable using a hand wheel
- 83 mm cutting height
- Long life TCT blade – Ø 315 mm for precise cutting results
- For precise cutting results
- Sturdy parallel guide / ripping fence
- 2 handles and wheels for easy transport
- Soft start for smooth operation

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 36

PROFESSIONAL



360°



SPECIFICATIONS

Dimensions L x W x H	1110 x 610 x 1050 mm	
Motor speed	2800 rpm	
Saw blade Ø	315 mm	
Table size	800 x 550 mm	
Table height	800 mm	
Cutting depth at 90°	83 mm	
Cutting depth at 45°	49 mm	
Saw blade adjustable	0° – 45°	
Sliding table guide rail	960 mm	
Motor	230 V~	400 V
Input	2200 W	2800 W



LOGISTICAL DATA

Weight net / gross	53 / 58 kg (230 V~)	53.5 / 59.5 kg (400 V)
Packaging dimensions	880 x 610 x 450 mm	
Order No	3901302949 (230 V~)	3901312949 (400 V)
Barcode	4046664009351	4046664009368
20 Container	110 pcs	
40 Container	225 pcs	
40 HQ Container	225 pcs	


HS120 | 12" TABLE SAW

THIS CIRCULAR SAW BENCH IS THE MOST ECONOMICAL OPTION FOR THE PRIVATE OR PROFESSIONAL USER. RECOMMENDED FOR LIGHT DUTY AND OCCASIONAL HEAVY USE UP TO 83 MM DEPTH OF CUT.

- Powerful 2800 Watt (2200 W – 230 V~) induction motor
- Sliding table carriage standard
- Sturdy, powder-coated sheet steel design and galvanised table-top
- Table length extension (can also be used as table width extension)
- Blade guard with suction hose outlet
- Fully adjustable blade height by easy use of handwheel
- 83 mm cutting height
- Long life TCT blade – Ø 315 mm for precise cutting results
- Saw blade guard for enhanced security
- Sturdy parallel guide / ripping fence
- 2 handles and wheels for easy transport
- Soft start for smooth operation

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 36

PROFESSIONAL

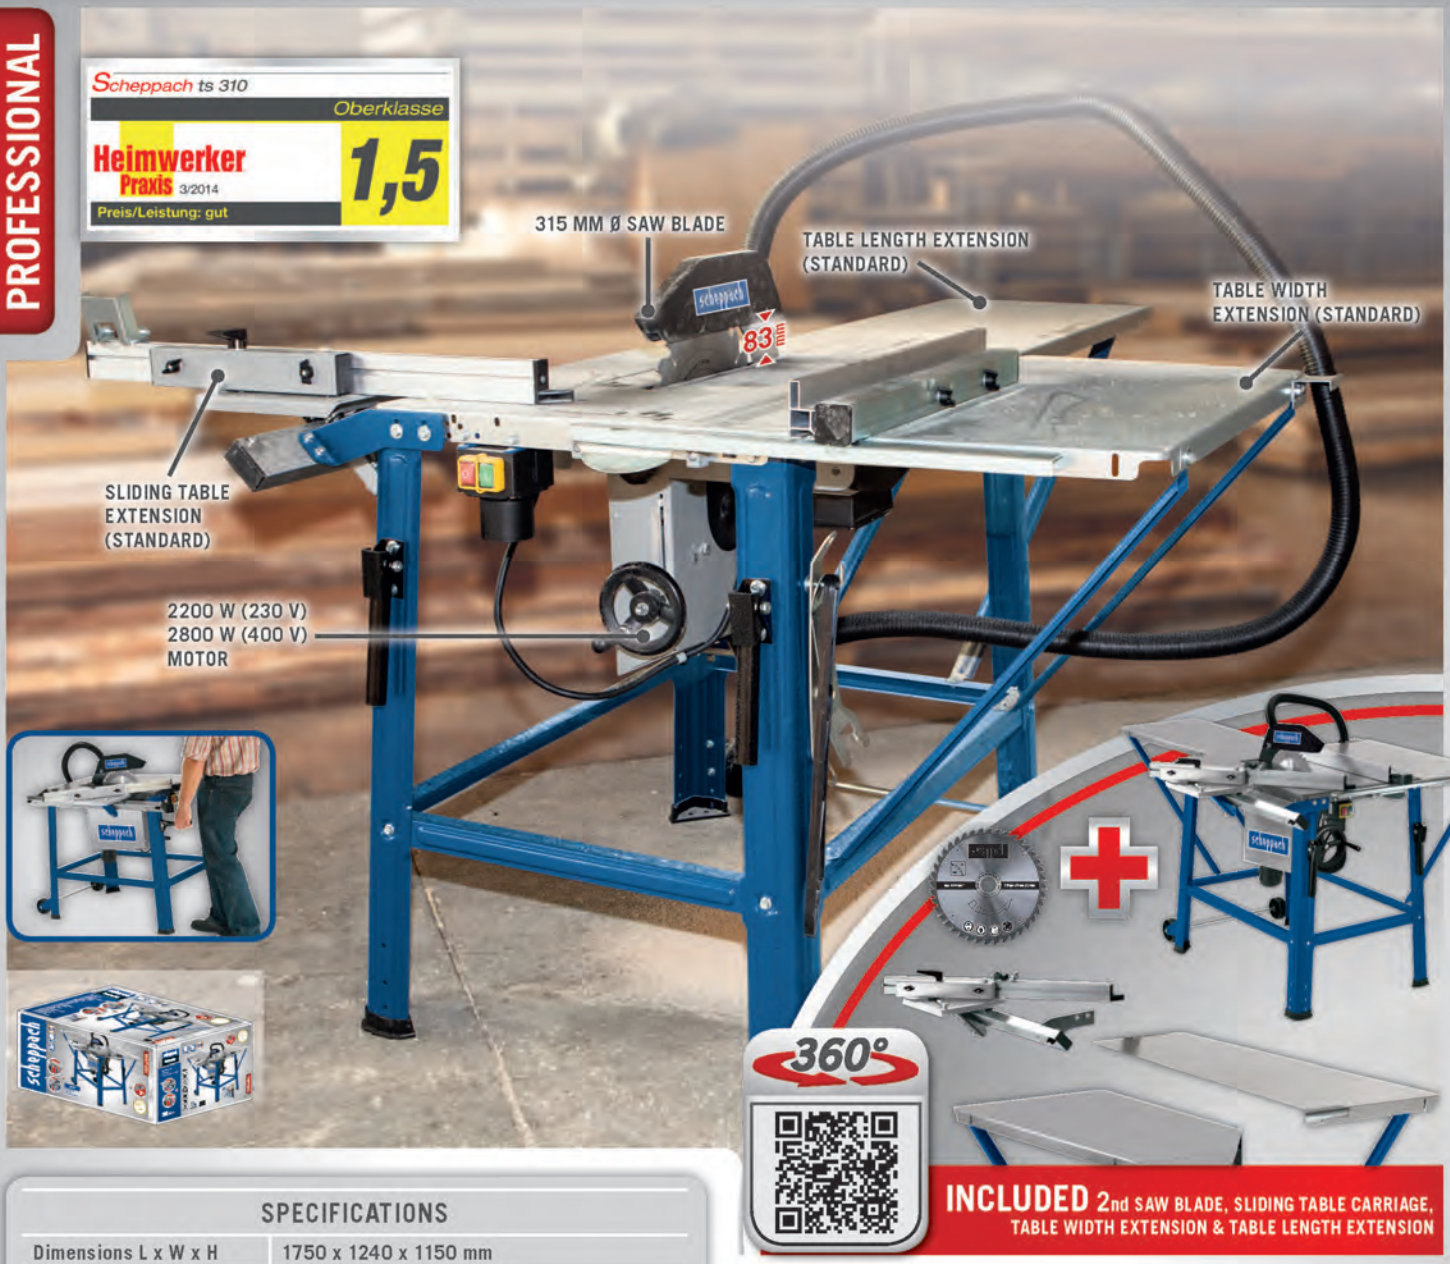

SPECIFICATIONS

Dimensions L x W x H	1750 x 1240 x 1150 mm	
Motor speed	2800 rpm	
Saw blade Ø	315 mm	
Table size	800 x 550 mm	
Table height	800 mm	
Cutting depth at 90°	83 mm	
Cutting depth at 45°	49 mm	
Saw blade adjustable	0° – 45°	
Sliding table guide rail	960 mm	
Motor	230 V~	400 V
Input	2200 W	2800 W

LOGISTICAL DATA

Weight net / gross	55 / 61 kg (230 V~)	57 / 64 kg (400 V)
Packaging dimensions	880 x 610 x 450 mm	
Order No	4901305901 (230 V~)	4901305902 (400 V)
Barcode	4014915082040	4014915082057
20 Container	110 pcs	
40 Container	225 pcs	
40 HQ Container	225 pcs	

TS310 | 12" TABLE SAW

THIS 315 MM TILT ARBOR SAW BENCH C/W SLIDING TABLE CARRIAGE, TABLE WIDTH EXTENSION, TABLE LENGTH EXTENSION, WHEEL KIT, LIFT HANDLES AND 2 X TCT SAW BLADES IS THE BEST COMPREHENSIVE SAW PACKAGE IN ITS CLASS. IDEAL FOR PRIVATE AND PROFESSIONAL USERS.

- Powerful 2800 Watt (2200 W – 230 V~) induction motor
- Sliding table carriage standard
- Sturdy, powder-coated sheet steel design and galvanised table-top
- Table length extension and table width extension
- Blade guard with suction hose outlet
- Fully adjustable blade height by easy use of handwheel
- 83 mm cutting height
- 2 long life TCT blades – Ø 315 mm for precise cutting results
- Saw blade guard for enhanced security
- Sturdy rip fence with two operating modes to correspond with blade at vertical or tilted positions.
- 2 handles and wheels for easy transport
- Soft start for smooth operation

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 36

HS80

	Description	Order Numbers	Barcode
1 Saw Blades	Ø 210 x 30 / 25.4 x 2.2 mm / 24 T	7901200715	4046664041405
	Ø 210 x 30 / 25.4 x 2.2 mm / 48 T		
	Ø 210 x 30 / 25.4 x 2.2 mm / 60 T		
2 Safety push stick		7901302701	4046664064190




HS100S

	Description	Order Numbers	Barcode
1 Saw Blade	Ø 250 x 30 x 2.8 / 1.8 mm / 24 T	3901306701	4046664009504
2 Safety push stick		7901302701	4046664064190



HS105

	Description	Order Numbers	Barcode
1 Saw Blades	Ø 254 x 30 / 25.4 x 2.8 mm / 48 T	7901200714	4046664041399
	Ø 254 x 30 / 25.4 x 2.8 mm / 60 T		
2 Saw Blade	Ø 255 x 30 x 2.8 / 48 T	3901306701	4046664009504
3 Safety push stick		7901302701	4046664064190

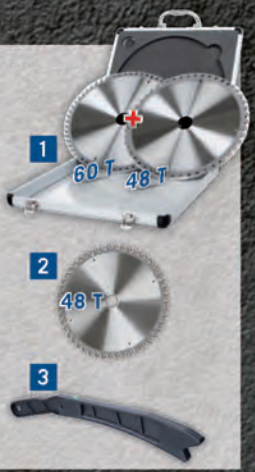

TS310

	Description	Order Numbers	Barcode
1 Saw Blades	Ø 315 x 30 / 25.4 x 2.8 mm / 24 T	7901200716	4046664042402
	Ø 315 x 30 / 25.4 x 2.8 mm / 48 T		
2 Saw Blade	Ø 315 x 30 x 3 x 2 mm / 24 T	3901302701	4046664002314
3 Saw Blade	Ø 315 x 30 x 3 x 2 mm / 48 T	3901302702	4046664008224
4 Safety push stick		7901302701	4046664064190




VARIABLE SPEED









360°

Scheppach SD1600V
Einstiegsklasse
Heimwerker Praxis 6/2016
Preis/Leistung: gut
1,7

SD1600V | 16" SCROLL SAW

AN IDEAL ADDITION TO ANY BENCH TOP WORKSHOP, THIS SCROLL SAW HAS THE RIGHT FEATURES FOR THE BEGINNER AND INTERMEDIATE WOODWORKER TO MAKE INTRICATE CUTS AND PATTERNS.

- Cutting height / depth: 50 / 406 mm
- Saw blade length 134 mm
- Table adjustment 0° – 45°
- Variable speed 500 – 1700 rpm
- LED light comes standard
- Accepts pin blades and plain end blades
- Quick release blade tension knob allows quick and easy blade change
- Nearly vibration free, allowing you to work with precision for professional looking results
- Blower keeps the working area free of dust
- Tool storage box

SPECIFICATIONS

Dimensions L x W x H	630 x 295 x 370 mm
Table size L / W	255 x 415 mm
Table adjustment	0° to 45°
Stroke speed	500 – 1700 rpm
Cutting height / depth	50 / 406 mm
Suction connector Ø	35 mm
Motor	220 – 240 V~
Input	120 W

LOGISTICAL DATA

Weight net / gross	12.7 / 14 kg
Packaging dimensions	655 x 285 x 365 mm
Order No	5901403903
Barcode	4046664037040
20 Container	402 pcs
40 Container	864 pcs
40 HQ Container	1008 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 41

VARIABLE SPEED

ACCEPTS PIN AND PLAIN END BLADES







LED



INCLUDED FOOT SWITCH

360°

SPECIFICATIONS

Dimensions L x W x H	630 x 320 x 330 mm
Table size L / W	414 x 254 mm
Table adjustment	0° to 45°
Stroke speed	550 – 1600 rpm
Cutting height / depth	50 / 406 mm
Suction connector Ø	35 mm
Motor	230 – 240 V~
Input	125 W

LOGISTICAL DATA

Weight net / gross	11.2 / 13.2 kg
Packaging dimensions	655 x 325 x 400 mm
Order No	5901404901
Barcode	4046664064176
20 Container	335 pcs
40 Container	690 pcs
40 HQ Container	720 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 41



FOOTSWITCH ENHANCES
FOOT SWITCH!
SAFETY AND CONVENIENCE

ADVANTAGES OF A FOOT SWITCH

- Easy to operate – power stays on as long as foot pressure is applied
- Keep both hands free to control your work at all times
- Turn machine on and off instantly simply by stepping on or off the pedal
- Generous 1300 mm cord length

DECO-XL | 16" SCROLL SAW

NEW STANDARDS FOR MODEL AND HOBBY. PRECISE OR COMPLICATED CUTS IN WOOD, PLASTIC, METAL, ACRYLIC GLASS OR PLASTER ARE CHALLENGES FACED BY THOSE MAKING MODELS AND HANDICRAFT WORKERS.

- Cutting height / depth: 50 / 406 mm
- Saw blade length 127 mm
- Table adjustment +45°
- Variable speed 550 – 1600 rpm
- One-step design – press once to turn on, release to turn off
- LED light and foot pedal switch are standard
- Accepts pin blades and plain end blades
- Quick release blade tension knob allows quick and easy blade change
- Nearly vibration free, allowing you to work with precision for professional looking results
- Blower keeps the working area free of dust

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 41

VARIABLE SPEED



ACCEPTS PIN AND PLAIN END BLADES

SPECIFICATIONS

Dimensions L x W x H	630 x 320 x 380 mm
Table size L / W	255 x 415 mm
Table adjustment	0° to 45°
Stroke speed	550 – 1600 rpm
Cutting height / depth	50 / 405 mm
Suction connector Ø	35 mm
Flexible shaft length	1070 mm
Speed shaft	1650 to 4800 rpm
Motor	230 – 240 V~
Input	125 W

LOGISTICAL DATA

Weight net / gross	12.4 / 15 kg
Packaging dimensions	665 x 320 x 410 mm
Order No	4901402901
Barcode	4014915082064
20 Container	335 pcs
40 Container	690 pcs
40 HQ Container	720 pcs









DECO-FLEX | 16" SCROLL SAW

THIS TRULY IS A PERFECT UNIVERSAL HOBBY CRAFTING MACHINE FOR BOTH PROFESSIONAL AND HOME USE. A HIGH PERFORMANCE, LOW-VIBRATION SCROLLSAW WITH MANY FEATURES AND BENEFITS THAT WILL BE OF INTEREST TO THE SERIOUS USER.

- Unique flexidrive for additional cutting, grinding and polishing tools all powered from the one unit.
- Cutting height / depth: 50 / 405 mm
- Saw blade length 127 mm
- Table adjustment 0° – 45°
- Variable speed 550 – 1600 rpm
- Accepts pin blades and plain end blades
- Quick release blade tension knob allows quick and easy blade change
- Adjustable lamp for illuminating the work area
- Nearly vibration free, allowing you to work with precision for professional looking results
- Adjustable blower to keep the work area free of dust

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 41

SD1600V / DECO-FLEX / DECO-XL

	Description	Order Numbers	Barcodes
1 Tool-Set (Plastic-box) for DECO-FLEX	64 pcs.	3901402701	4046664031284
2 Universal-Sawblade-Set	5 x 12 pcs.	88000010	4014915038030
3 Sawblades 6 pcs.	Ø 135 x 2 x 0.25 mm / 25 T	88000011	4014915030805
	Ø 135 x 2 x 0.25 mm / 18 T	88000012	4014915030812
	Ø 135 x 3 x 0.5 mm / 10 T	88000013	4014915030829











360°

1500 W

max. 40 mm



TABLE WIDTH EXTENSION
RIGHT AND LEFT
(STANDARD)



HF50 | BENCH / TOP SHAPER-ROUTER

THIS COMPACT MACHINE IS SUITABLE FOR ALL HOME WOODWORKERS, DIY ENTHUSIASTS AND CRAFTSMEN. FOR REAL CONVENIENCE, THE HF50 IS COMPACT AND UNOBTRUSIVE – IDEAL FOR BENCH-TOP USE IN THE HOME WORKSHOP.

- Variable speed control 11500 to 24000 rpm
- Use router cutters shanks dia. 6 mm / 8 mm / 12 mm or 1/2" / 1/4"
- Motor power 1500 Watt
- Included mitre fence, aluminium fence, infeed and outfeed tables
- Adjustable spindle height 0 to 40 mm
- This compact machine offers you all the important features of a big machine at an economic price

SPECIFICATIONS

Dimensions L x W x H	1030 x 360 x 311 mm
Table size	610 x 360 mm
Speed	11500 – 24000 rpm
Spindle height	0 – 40 mm
Table inserts	32 / 47 / 55 mm
Motor	230 – 240 V~
Input	1500 W

LOGISTICAL DATA

Weight net / gross	21.65 / 23.9 kg
Packaging dimensions	655 x 520 x 370 mm
Order No	4902105901
Barcode	4046664037798
20 Container	220 pcs
40 Container	440 pcs
40 HQ Container	500 pcs



HBS30 | BAND SAW

EVERY HOBBYIST NEEDS A PORTABLE BAND SAW. SCHEPPACH´S HBS30 IS SUITABLE FOR WORKING ON BOTH SOFT AND HARDWOOD.

- Sturdy table, tilting from 0° to 45°
- Powerful induction motor for quite and precise cutting
- Rip fence for straight cuts (with quick-release fastener for easy, precise setting up)
- Robust steel construction
- Cutting capacity up to a thickness of 80 mm
- Large working table (300 x 380 – 520 mm) for multiple applications







360°



SPECIFICATIONS

Dimensions L x W x H	420 x 530 x 690 mm
Table size	300 x 380 to 520 mm
Table adjustment	0° to 45°
Band wheel Ø	200 mm
Saw blade length	1400 mm
Cutting speed	900 m/min
Clearance height / width	80 / 200 mm
Motor	230 – 240 V~
Input	350 W

LOGISTICAL DATA

Weight net / gross	19 / 21 kg
Packaging dimensions	740 x 420 x 310 mm
Order No	5901501905
Barcode	4046664073499
20 Container	384 pcs
40 Container	768 pcs
40 HQ Container	917 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 52

2 SPEEDS

HBS261 | 10" BANDSAW

THE SCHEPPACH HBS261 BAND SAW IS THE IDEAL COMPANION FOR YOUR WORKSHOP. WITH ITS TWO CUTTING SPEEDS, THIS MACHINE ENABLES SMOOTH AND PRECISE CUTS IN BOTH HARD AND SOFT WOOD.

- Solid die-cast alloy table which is tiltable from 0° to 45°
- Powerful induction motor provides quiet, powerful cutting operation
- Long ripping fence for accurate, straight cuts
- Quick lock for fast and rigid locking
- Solid all-steel construction
- Generous cut capacity of workpieces up to 120 mm thick
- Two speeds for a variety of materials
- Incl. mitre gauge and second saw blade









LOGISTICAL DATA

Weight net / gross	20.5 / 27.5 kg
Packaging dimensions	870 x 450 x 345 mm
Order No	5901505901
Barcode	4046664068051
20 Container	210 pcs
40 Container	420 pcs
40 HQ Container	445 pcs



SPECIFICATIONS

Dimensions L x W x H	580 x 430 x 860 mm
Table size	300 x 380 – 535 mm
Table adjustment	0° – 45°
Band wheel Ø	250 mm
Saw blade length	1790 mm
Cutting speed	660 / 960 m/min
Clearance height / width	120 / 245 mm
Motor	220 – 240 V~
Input	500 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 52

scheppach Germany

2 SPEEDS

HBS400 | BANDSAW


THIS BANDSAW COMBINES RELIABLE SERVICE WITH A-1 PERFORMANCE IN JOINERY SHOPS, HOME WORKSHOPS; CUTTING PLASTICS OR WOOD; OR ANYWHERE THE CUTTING OF CURVES AND COMPOUND CURVES IS REQUIRED.

- Generous cutting capacity of 170 mm allows sawing of large work pieces
- Rigid steel stand provides a comfortable working height
- Plenty of power for all cutting operations
- Large table top provides a flat operating platform for accurate cutting
- Dust port for highly effective dust extraction
- 2 speeds for cutting various materials





Precise upper and lower roller guide with ball-bearings.

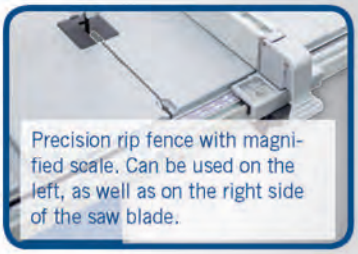

Precision rip fence with magnified scale. Can be used on the left, as well as on the right side of the saw blade.



TABLE WIDTH EXTENSION (STANDARD)

LEG STAND (STANDARD)



INCLUDED
MITRE GAUGE & 2nd SAW BLADE

LOGISTICAL DATA

Weight net / gross	70 / 74 kg
Packaging dimensions	1100 x 400 x 500 mm
Order No	5901503905
Barcode	4046664073703
20 Container	120 pcs
40 Container	240 pcs
40 HQ Container	240 pcs




SPECIFICATIONS

Dimensions L x W x H	770 x 610 x 1605 mm
Table size	500 x 400 mm
Table adjustment	0° – 45°
Band wheel Ø	315 mm
Saw blade length	2240 mm
Cutting speed	720 / 360 m/min
Clearance height / width	170 / 305 mm
Motor	220 – 240 V~
Input	750 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 52

PROFESSIONAL


360°

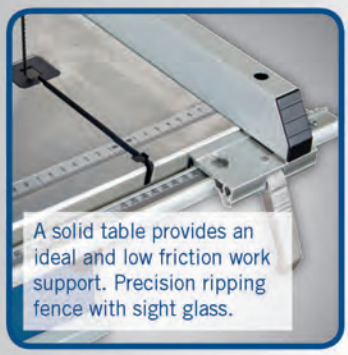

A solid table provides an ideal and low friction work support. Precision ripping fence with sight glass.



Impressive cutting height of 100 mm.

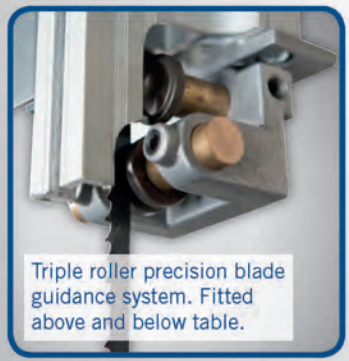

Triple roller precision blade guidance system. Fitted above and below table.



Balanced band wheels with rubber facing.



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 52



BASA1 | 8" BANDSAW

MOST INNOVATIVE DESIGN FEATURES OF THE SCHEPPACH AWARD WINNING BASA SERIES ARE FOUND IN THIS UNIQUE BENCHTOP BANDSAW. EVEN AT FIRST GLANCE IT IS EASY TO SEE IT IS IN A CLASS OF ITS OWN. IF ITS WORKING SPECIFICATION IS SUITABLE FOR YOUR REQUIREMENTS YOU WON'T FIND BETTER.

- 3-roller precision guiding above and below the table
- Upper saw blade guiding by toothed rack, height adjustable
- Balanced band wheels with rubber facing
- Sturdy table, tiltable from 0° to 45°
- Maximum cutting height: 100 mm
- Throat: 195 mm
- Precision ripping fence with magnifying glass can be used either on the left or on the right side of the saw blade





LOGISTICAL DATA

Weight net / gross	18 / 20 kg
Packaging dimensions	775 x 330 x 410 mm
Order No	1901501901
Barcode	4014915079002
20 Container	270 pcs
40 Container	550 pcs
40 HQ Container	666 pcs




SPECIFICATIONS


Dimensions L x W x H	450 x 500 x 700 mm
Table size	320 x 310 mm
Table adjustment	0° – 45°
Band wheel Ø	200 mm
Saw blade length	1490 mm
Cutting speed	880 m/min
Clearance height / width	100 / 195 mm
Motor	230 – 240 V~
Input	300 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 52

PROFESSIONAL

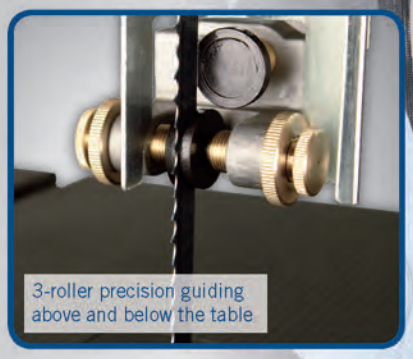

3-roller precision guiding above and below the table

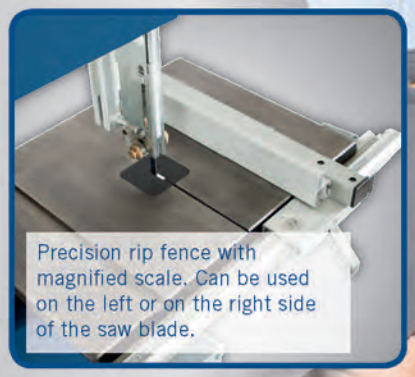

Precision rip fence with magnified scale. Can be used on the left or on the right side of the saw blade.



Unique vario drive. Adjustable speeds from 370 to 750 m/min.

VARIO DRIVE



Cutting height adjustment by hand wheel.

VARIO DRIVE

scheppach

205 mm

CAST IRON TABLE (STANDARD)

BASE UNIT (STANDARD)

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 52

BASA3 | 12" BANDSAW PROFESS.

MORE TECHNOLOGICAL INNOVATION WITH THE NEW SCHEPPACH BASA3 BANDSAW THAN ANY OTHER IN ITS CLASS. SIMPLY "CHECK THE SPEC" BELOW AND SEE HOW MUCH MORE YOU GET FOR YOUR MONEY WHEN YOU CHOOSE THE NEW BASA3. TRUST SCHEPPACH!

- Unique vario drive adjustable from 370 to 750 m/min
- Sturdy cast-iron table tiltable from -8° to +45°
- 3-roller precision guiding above and below the table
- Balanced and ground band wheels with rubber facing
- Quick-clamping lever for saw blade
- Maximum cutting height: 205 mm
- Throat 306 mm
- Precision rip fence with magnified scale which can be set both left and right of saw blade
- Leg stand with wheel kit included



360°

CAST IRON TABLE



Impressive cutting height of 205 mm.



Quick-lock clamping system for minimum down time when changing bandsaw blade.



Patented table tilting mechanism. Tilting range from -8° to +45° degrees with precise single hand setting control.


Leg stand with wheel kit included. Note the convenient pull out handle for easy manoeuvrability.

SPECIFICATIONS

Dimensions L x W x H	610 x 1030 x 1660 mm	
Table size	548 x 400 mm	
Table adjustment	-8° – +45°	
Band wheel Ø	315 mm	
Saw blade length	2360 mm	
Cutting speed	370 to 750 m/min	
Clearance height / width	205 / 306 mm	
Motor	230 – 240 V~	400 V
Input	800 W	700 W



LOGISTICAL DATA


Weight net / gross	79 / 84.5 kg	
Packaging dimensions	1150 x 620 x 430 mm	
Order No	1901503901 (230 V)	1901503902 (400 V)
Barcode	4014915079019	4014915 079026
20 Container	90 pcs	
40 Container	190 pcs	
40 HQ Container	228 pcs	

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 52

PROFESSIONAL

360°

CAST IRON TABLE

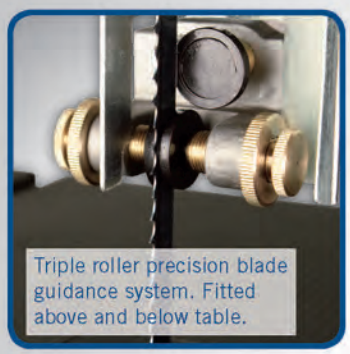


Triple roller precision blade guidance system. Fitted above and below table.

2 SPEEDS



Two speeds 700 and 1000 m/min for a variety of materials.

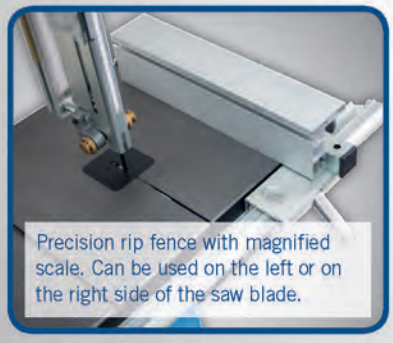

Precision rip fence with magnified scale. Can be used on the left or on the right side of the saw blade.



Cutting height adjustment using hand wheel.



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 52

BASA4 | 14" BANDSAW

THIS MACHINE IS THE PERFECT CHOICE FOR ANYONE WHO CHOOSES TO GRACE THEIR WORKSHOP FLOOR SPACE WITH AN OUTSTANDING MACHINE. THE NEW BASA4 IS AN INTERMEDIATE SIZED PROFESSIONAL BANDSAW. COMPACT, ROBUST, CAST IRON BAND WHEELS, FINELY BALANCED, QUIET RUNNING, AND AN OUTSTANDING SPECIFICATION.

- Two speeds 700 and 1000 m/min for the most varying materials
- Sturdy cast-iron table tiltable from -17° to +45°
- 3-roller precision guiding above and below the table
- Adjustable saw band guide via toothed rack
- Balanced and grinded band wheels with rubber facing
- Quick-clamping lever for saw blade
- Maximum cutting height: 250 mm
- Throat 375 mm
- Precision rip fence with magnified scale which can be set both left and right of saw blade
- Leg stand with wheel kit included



Leg stand with wheel kit included. Note the convenient pull out handle for easy manoeuvrability.







Impressive cutting height of 250 mm.



Quick-lock clamping system for minimum down time when changing bandsaw blade.



Patented table tilting mechanism. Tilting range from -17° to +45° degrees with precise single hand setting control.

SPECIFICATIONS

Dimensions L x W x H	1050 x 600 x 1940 mm	
Table size	400 x 548 mm	
Table adjustment	-17° – +45°	
Band wheel Ø	380 mm	
Saw blade length	2895 mm	
Cutting speed	700 / 1000 m/min	
Clearance height / width	250 / 375 mm	
Motor	230 – 240 V~	400 V
Input	1500 W	

LOGISTICAL DATA

Weight net / gross	107 / 114 kg	
Packaging dimensions	1390 x 700 x 465 mm	
Order No	5901504901 (230 V)	5901504902 (400 V)
Barcode	4046664064015	4046664064022
20 Container	60 pcs	
40 Container	120 pcs	
40 HQ Container	120 pcs	



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 52

HBS20

	Description	Order Numbers	Barcode
1 Bandsaw blade	6.4 x 0.4 x 1400 mm, 6 T/in	3901504037	4046664014676



HBS261

	Description	Order Numbers	Barcode
1 Bandsaw blade	13 x 0.35 x 1790 mm, 6 T/in	7901505701	4046664066149




HBS300

	Description	Order Numbers	Barcode
1 Mitre Gauge	-60° to +60°	4901501701	4046664038177
2 Bandsaw blade	13 x 0.5 x 2240 mm, 4 T/in	3901502141	4046664015246
3 Bandsaw blade	6 x 0.5 x 2240 mm, 6 T/in	3901502702	4046664024507
4 Bandsaw blade	6 x 0.36 x 2240 mm, 24 T/in	3901502703	4046664024514




BASA1

	Description	Order Numbers	Barcode
1 Mitre Gauge	-60° to +60°	7901501001	4046664042648
2 Bandsaw blade	12 x 0.36 x 1490 mm, 4 T/in	73220701	4014915039624
3 Bandsaw blade	10 x 0.36 x 1490 mm, 14 T/in	73220702	4014915039631
4 Bandsaw blade	6 x 0.36 x 1490 mm, 24 T/in	73220703	4014915039648
5 Bandsaw blade	6 x 0.36 x 1490 mm, 6 T/in	73220704	4014915039655
6 Bandsaw blade	3 x 0.45 x 1490 mm, 14 T/in	73220705	4014915039662

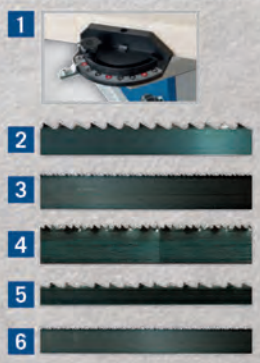

BASA3

	Description	Order Numbers	Barcode
1 Bandsaw blade	12 x 0.5 x 2360 mm, 4 T/in	73190701	4014915037408
2 Bandsaw blade	3,5 x 0.5 x 2360 mm, 14 T/in	73190706	4014915037453
3 Bandsaw blade	6 x 0.5 x 2360 mm, 6 T/in	73190702	4014915037415
4 Bandsaw blade	6 x 0.65 x 2360 mm, 22 T/in	73190707	4014915037460
5 Bandsaw blade	12 x 0.5 x 2360 mm, 6 T/in	73190705	4014915037446
5 Bandsaw blade	15 x 0.5 x 2360 mm, 4 T/in	73190704	4014915037439



BASA4

	Description	Order Numbers	Barcode
1 Bandsaw blade	12 x 0.65 x 2895 mm, 4 T/in	73230701	4014915041757
2 Bandsaw blade	6 x 0.65 x 2895 mm, 6 T/in	73230702	4014915041764
3 Bandsaw blade	15 x 0.65 x 2895 mm, 4 T/in	73230704	4014915041788



	Description	Order Numbers	Barcode
1 Safety push stick for HBS20, HBS261, HBS300, BASA1, BASA3 and BASA4		7901302701	4046664064190





OPTIONAL ACCESSORY

HSS PLANING KNIVES
Two-piece set

Order No: 3902202701
Barcode: 4046664000310



HMS850 | 8" X 5" PLANER / THICKNESSER

FOR THOSE WITH LIMITED SPACE AND THE NEED OF A COMBINATION PLANER, THIS COMPACT HMS850 IS JUST THE NUMBER. IT'S A PERFECTLY SCALED DOWN VERSION OF A FULL SIZED MACHINE.

- Combination bench top jointer and planer provides a 2in1 machine to maximize work space
- Powerful 1250 Watt motor provides various cutting applications
- Compact bench top design fits conveniently in small workshop environments
- Two high speed steel knives for precise, smooth cuts
- Precision machined table top ensures a smooth, straight cut
- Four metal wing feet ensures the machine will remain stable whilst planing longer timber sections

SPECIFICATIONS

Dimensions L x W x H	770 x 420 x 450 mm
Surfacing table size	740 x 210 mm
Thicknessing table size	250 x 204 mm
Number of blades	2
Cutter block Speed	9000 rpm
SURFACE PLANING	
Plane width	204 mm
Stock removal max.	2 mm
THICKNESSING	
Clearance height / width	120 / 204 mm
Stock removal max.	2 mm
Motor	230 – 240 V~
Input	1250 W

LOGISTICAL DATA

Weight net / gross	23 / 26.5 kg
Packaging dimensions	830 x 465 x 440 mm
Order No	5902205901
Barcode	4046664037477
20 Container	175 pcs
40 Container	350 pcs
40 HQ Container	420 pcs





OPTIONAL ACCESSORY

HSS PLANING KNIVES
Two-piece set


Order No: 3902203701
Barcode: 4046664001881

SPECIFICATIONS

Dimensions L x W x H	970 x 490 x 485 mm
Surfacing table size	920 x 264 mm
Thicknessing table size	380 x 254 mm
Number of blades	2
Cutter block Speed	8500 rpm
SURFACE PLANING	
Plane width	254 mm
Stock removal max.	2 mm
THICKNESSING	
Clearance height / width	120 – 254 mm
Stock removal max.	2 mm
Motor	230 V~
Input	1500 W

LOGISTICAL DATA

Weight net / gross	27.5 / 32 kg
Packaging dimensions	1020 x 525 x 445 mm
Order No	5902209901
Barcode	4046664073734
20 Container	110 pcs
40 Container	230 pcs
40 HQ Container	276 pcs

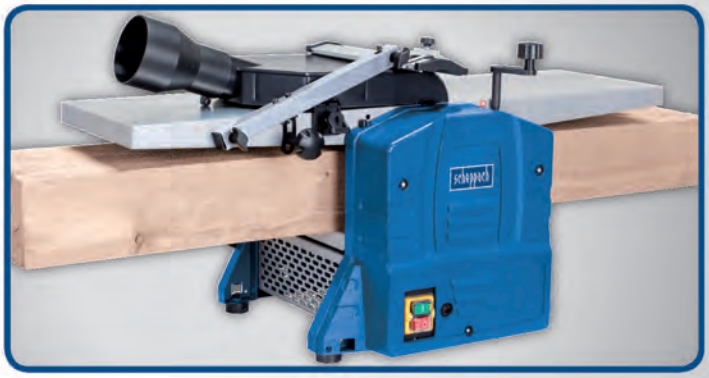

HMS1080 | 254 MM PLANER / THICKNESSER

FOR THOSE WITH LIMITED SPACE AND THE NEED OF A COMBINATION PLANER THIS COMPACT HMS850 IS JUST THE NUMBER. IT'S A PERFECTLY SCALED DOWN VERSION OF A FULL SIZED MACHINE. ADJUSTABLE PLANER FENCE INCLUDED.

- Combination bench top jointer and planer provides a 2in1 machine to maximize work space
- Powerful 1500 Watt motor provides various cutting applications
- Compact bench top design fits conveniently in small workshop environments
- Two high speed steel knives for precise, smooth cuts
- Easy height adjustment via knob



HA1000 | DUST COLLECTOR

A MAGNIFICENT LITTLE WORKHORSE AT AN INCREDIBLE PRICE. THIS DUST COLLECTOR OUT-PERFORMS ALL TYPES OF WET / DRY VACUUM CLEANERS WHEN IT COMES TO WOOD DUST EXTRACTION. USE COMMON SENSE AND BUY THE RIGHT TOOL FOR THE JOB. EXCELLENT FOR THE SMALL WORKSHOP.

- Maximum efficiency with 0.5 micron rating.
- Total mobility. Can be transported easily in pick-up truck or the boot of a car.
- Flexible hose (Ø 100 mm) with multiple adaptors, making it ideal for use with single-purpose machines such as a table saw and equally suitable for all power tools.
- Strong barrel container
- Various filters. Comes complete with four paper filters for an immediate clean work area.
- Suitable for MDF, particle board etc

183 m³/h

1100 W

50 L

360°



INCLUDED ADAPTER SET FOR VARIOUS APPLICATIONS

SPECIFICATIONS

Dimensions L x W x H	400 x 400 x 700 mm
Suction connector Ø	100 mm
Hose length	2000 mm
Airflow	183 m³/h
Vacuum max.	25 kPa
Filter surface	0.3 m²
Container	50 L
Motor	220 – 240 V~
Input	1100 W

LOGISTICAL DATA

Weight net / gross	10.5 / 13 kg
Packaging dimensions	405 x 405 x 710 mm
Order No	4906302901
Barcode	4014915084761
20 Container	210 pcs
40 Container	435 pcs
40 HQ Container	522 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 59


120 m³/h
1250 W
5 L



Scheppach ha 200s
Oberklasse
Heimwerker Praxis 1/2014
Preis/Leistung: gut - sehr gut
1,5
Is identical with HD2P

OPTIONAL ACCESSORIES

DUST BAG



Order Number: 3906307701
Barcode: 4046664026181

HD2P | VACUUM SYSTEM

THE SCHEPPACH HD2P – A PERFECT "3IN1" PORTABLE EXTRACTOR, VACUUM CLEANER AND INFLATOR FOR THE WORKSHOP, ON SITE AND AT HOME.

- Powerful 1250 Watt motor
- Extraction and inflating accessories included
- Dust free extraction – ideal for most power tools
- Air pump for inflating
- Compact and portable
- Ideal for professional and domestic use
- No loose pieces, everything stores away neatly



INCLUDED EXTRACTION AND INFLATING ACCESSORIES & DUST BAG

SPECIFICATIONS

Dimensions L x W x H	435 x 345 x 230 mm
Air capacity	120 m³/h
Filling capacity	5 L
Filter size	350 x 250 mm
Hose Ø / length	40 / 2000 mm
Filter rating	3 µm
Motor	230 – 240 V~
Input	1250 W

LOGISTICAL DATA

Weight net / gross	4.8 / 6.6 kg
Packaging dimensions	475 x 385 x 245 mm
Order No	5906301901
Barcode	4046664023616
20 Container	648 pcs
40 Container	1350 pcs
40 HQ Container	1500 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 59

3 IN 1

- **Extractor** power tools
- **Vacuum cleaner** household
- **Inflator** multi-purpose



Typical Scheppach HD2p application in the workshop. Perfect for maintaining a clean work environment.



Kiddies been snacking whilst in the car? Easily remedied with the Scheppach HD2p.



Especially useful in the home and when drilling materials where the dust is a health risk. Note how the drilling adaptor clings firmly to the wall by means of the vacuum leaving both hands free. Convenient, safe and dust free.



Having unexpected visitors? The Scheppach HD2p will inflate that airbed in minutes. Also ideal for all inflatable items such as kiddies summer paddling pool etc.



Fastidious when finishing in the workshop? The Scheppach HD2p will be your favourite environmental friend.

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 59

360°



HD12 | DUST COLLECTOR

ANYONE WORKING WOOD MACHINERY WITHOUT A DUST EXTRACTOR IS NOT ONLY CREATING A GREAT DEAL OF MESS BUT IS ALSO DAMAGING HIS HEALTH. THE SCHEPPACH HD12 IS THE SOLUTION TO BOTH THESE PROBLEMS PROVIDING SUFFICIENT AIR FLOW TO DEAL WITH ALL DUST PROBLEMS. IDEAL FOR THE SMALLER WORKSHOP.

- Powerful 0.75 HP motor provides efficient dust collection
- 100 mm inlet collects large volumes of chips, dust and debris
- Large capacity dust bag allows extended use between emptying cycles
- Carry handle allows the unit to be easily moved around the work area when required
- Flexible 2.3 m collection hose for greater versatility when connecting equipment
- Filling capacity: 75 L
- Included adapter set for various applications

1150 m³/h

550 W

75 L



INCLUDED ADAPTER SET FOR VARIOUS APPLICATIONS

SPECIFICATIONS

Dimensions L x W x H	860 x 520 x 1610 mm
Suction connector Ø	100 mm
Hose length	2.3 m
Air capacity	1150 m³/h
Filling capacity	75 L
Partial vacuum	1600 Pa
Motor	220 – 240 V~
Input	550 W

LOGISTICAL DATA

Weight net / gross	20 / 23 kg
Packaging dimensions	900 x 540 x 380 mm
Order No	3906301915
Barcode	4046664004943
20 Container	138 pcs
40 Container	285 pcs
40 HQ Container	330 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 59


HD2P

	Description	Order Numbers	Barcode
1 Dust bag		3906307701	4046664026181



HA1000

	Description	Order Numbers	Barcode
1 Paper bags	5 pcs	75100702	4014915044529
2 Sub micron filter		75100701	4014915044512
3 Automatic switch-on mechanism 230 V~	Version A, working machine single-phase, dust extractor single-phase, mains supply singlephase	79104010	4014915027690
4 Automatic switch-on mechanism 230 V~ / 400 V	Version B, working machine single/three-phase, dust extractor single/three-phase, mains supply three-phase	79104020	4014915027706
5 Adapter kit		75200703	4014915096221

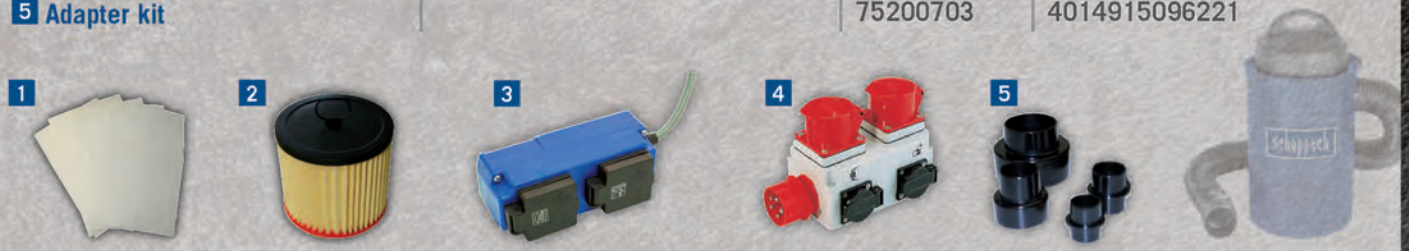

HD12

	Description	Order Numbers	Barcode
1 Flat cleaning nozzle	Flat, for cleaning the machine and the area, connector-Ø 100 mm, suction port 140 x 30 mm	75206003	4014915018230
2 Hose extension coupling	Ø 100 mm, incl. 2 hose clamps	75003300	4014915017905
3 Filter bag needle felting		3906301013	4046664003762
4 Dust bags	1000 x 550 mm, transparent, Set = 20 pcs	75001500	4014915017837
5 Adapter kit		75200703	4014915096221



550 W

HEIMWERKER-TEST.DE
Scheppach Drechselbank dmt 450
Einstiegsklasse
★★★★☆
02 / 2013
Is identical with DM460T

360°



SPECIFICATIONS

Dimensions L x W x H	930 x 375 x 400 mm
Bed height	152 mm
Speed	650, 1000, 1450, 2000, 3000 rpm
Spindle head thread	M 33
Max. Ø over bed	305 mm
Distance between centres	457 mm
Motor	220 – 240 V~
Input	550 W

LOGISTICAL DATA

Weight net / gross	34.5 / 37 kg
Packaging dimensions	840 x 300 x 460 mm
Order No	4902301901
Barcode	4014915086833
20 Container	245 pcs
40 Container	490 pcs
40 HQ Container	560 pcs



OPTIONAL ACCESSORIES

LATHE BED EXTENSION
Expands bed length to max. 1007 mm



Order No: 4902301701
Barcode:
4014915086888

HSS TOOL SET, 5-FOLD
L 250 mm



Order No: 88002716
Barcode:
4014915040026

HSS TOOL SET, 6-FOLD
L 470 mm



Order No: 88002717
Barcode:
4014915044758

DM460T | HOBBY LATHE

THE DM460T IS THE IDEAL MACHINE FOR THE WOODWORKER WHO REQUIRES A PROFESSIONAL QUALITY MACHINE DEDICATED TO SMALL OR MINIATURE WORK. THE SMALLEST MODEL WITHIN THE RANGE OF SCHEPPACH LATHES, IT RUNS TRUE AND VIBRATION FREE BENEFITING FROM SOLID CAST IRON CONSTRUCTION, POWERFUL INDUCTION MOTOR AND FIVE STEP PULLEY SPEED RANGE, THIS NEW MINI LATHE WILL GIVE TOTAL SATISFACTION.

- Solid cast iron construction
- Smooth 0.75 HP induction motor
- Light enough to transport in the boot of a car
- Cast iron lathe bed for stability and low vibration

PROFESSIONAL



DM1000T | WOOD LATHE

THE SCHEPPACH DM1000T WOOD LATHE HANDLES EVEN BIG WORK-PIECES WITHOUT ANY PROBLEM. THE BED LENGTH OF 1000 MM AND THE MAXIMUM DIAMETER OF 350 MM ALLOW YOU TO REALISE ALMOST EVERY PROJECT. DESPITE THE LONG BED LENGTH, THE MACHINE IS QUITE HANDY, FITS IN EVERY WORKSHOP AND, WITH ITS 4 SPEEDS, IT IS PERFECTLY SUITABLE FOR EVERY TASK.

- Long bed length of 1000 mm
- Fit for workpieces of up to 350 mm
- Four speeds 890 / 1260 / 1760 / 2600 rpm
- Strong 400 W motor for always sufficient power
- Comes with sliding cast-iron tailstock with replaceable tips, adjustable backrest tools, front carrier with a removable cover
- Strong and durable construction with square-type tubes

SPECIFICATIONS

Dimensions L x W x H	1460 x 210 x 360 mm
Bed height	175 mm
Speed	890 / 1260 / 1760 / 2600 rpm
Spindle head thread	M 18
Max. Ø over bed	350 mm
Distance between centres	1000 mm
Motor	230 – 240 V~ / 50 Hz
Input	400 W

LOGISTICAL DATA

Weight net / gross	22 / 24 kg
Packaging dimensions	895 x 230 x 380 mm
Order No	5902303901
Barcode	4046664069331
20 Container	378 pcs
40 Container	768 pcs
40 HQ Container	835 pcs





TIGER 2000S | 8" SHARPENING SYSTEM

IDEAL FOR HOME AND THE SMALL WORKSHOP
Correct grinding and honing is an art in itself. Without training and experience, costly mistakes can be made and expensive tooling ruined. This wetstone sharpening system offers superb, professional results and a razor sharp finish every time. With total accuracy and sharpening efficiency, this wetstone sharpening system is easy to use even for a beginner. Ideal for the home and small workshop and with a comprehensive range of accessories, it is perfect for creating sharp cutting edges on knives, scissors and tools:
The 8" wetstone sharpening system offers superior technology for professional results every time – even if you are a beginner.

- Powerful induction motor provides superior power for long-lasting smooth performance
- Includes a special stone containing aluminium oxide to achieve the perfect grinding results in less time, also ideal for HSS tools
- Includes jig for straight edges, plane irons, chisels
- Abrasive paste for polishing workpiece after sharpening
- Includes angle setting jig for measuring exact angles and settings
- Shatter-proof water tank
- Removable leather honing wheel. After sharpening, it removes all burrs and creates a smooth and sharp edge.

SPECIFICATIONS

Dimensions L x W x H	460 x 270 x 310 mm
Grinding stone size Ø / width	200 x 40 mm
Stone grit	K 220
Material	top-quality grindstone with aluminium oxide
Leather honing wheel Ø / width	220 x 30 mm
Rotation speed	120 rpm
Motor	230 – 240 V~
Input	120 W

LOGISTICAL DATA

Weight net / gross	8.5 / 10 kg
Packaging dimensions	410 x 330 x 330 mm
Order No	89490916
Barcode	4014915042006
20 Container	684 pcs
40 Container	1400 pcs
40 HQ Container	1601 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 68

360°




Angle Guide


Straight edge (jig 70)



Large grinding surface thanks to the 50 mm large grinding stone



Longlife Ø 250 mm grinding stone

TIGER 2500 | 10" SHARPENING SYSTEM

IDEAL FOR HOME TO LIGHT INDUSTRIAL AND PROFESSIONAL USE. Correct grinding and honing is an art in itself. Extensive accessories included with the standard equipment: The 10" wetstone sharpening system offers superior technology for professional results every time – even if you are a beginner.

- Ideal choice for all craftsmen and training workshops
- Solid, powder-coated casing, splash-proof motor and switch
- Powerful induction motor provides superior power for long-lasting smooth performance
- Includes a special stone containing aluminium oxide to achieve the perfect grinding results in less time, also ideal for HSS tools
- Includes jig for straight edges, plane irons, chisels
- Abrasive paste for polishing workpiece after sharpening
- Includes angle setting jig for measuring exact angles and settings
- Shatter-proof water tank
- Removable leather honing wheel. After sharpening, it removes all burrs and creates a smooth and sharp edge



INCLUDED STRAIGHT EDGE (JIG 70), ANGLE GUIDE & ABRASIVE PASTE

LOGISTICAL DATA

Weight net / gross	16.5 / 17.5 kg
Packaging dimensions	390 x 380 x 390 mm
Order No	5903202901
Barcode	4046664037491
20 Container	500 pcs
40 Container	1000 pcs
40 HQ Container	1020 pcs



SPECIFICATIONS

Dimensions L x W x H	440 x 330 x 480 mm
Grinding stone size Ø / width	250 x 50 mm
Stone grit	K 220
Material	top-quality grindstone with grinding grains of aluminium oxide
Leather honing wheel Ø / width	200 x 30 mm
Rotation speed	90 rpm
Motor	230 – 240 V~
Input	200 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 68

VARIABLE SPEED

360°

180 W MOTOR

63 mm

250 MM GRINDSTONE-Ø

ADJUSTABLE SPEED
FROM 90 – 150 RPM



INCLUDED STRAIGHT EDGE (JIG 70),
ANGLE GUIDE & ABRASIVE PASTE



STRAIGHT EDGE (JIG 70)
Ensures a quick start to sharper work – designed for many straight standard tools



ANGLE GUIDE 200/250
Makes sure that you always have the correct angle for your tools

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 68







TIGER 3000VS | VARIABLE SPEED 10" x 2½" SHARPENING SYSTEM

IDEAL FOR HOME & SMALL WORKSHOPS
Without the correct equipment, grinding and honing tools is an art form. Without proper training, at best costly mistakes can be made and at worst expensive tooling can be ruined. However, the Scheppach TIGER 3000VS sharpening system offers superb professional results and razor sharp tools with the minimum of experience even by a beginner. With the added advantage of variable speed, a desired rotation speed is guaranteed irrespective of the diameter of the grinding stone. Ideal for home and small workshops and with a wide range of optional accessories, this unique piece of equipment is perfect for knives, scissors, axes, and all manner of workshop tools. Check the TIGER 3000VS spec. Compare the price. Choose Scheppach.

- Powerful induction motor provides superior power for long-lasting smooth performance
- Variable speed 90 – 150 rpm
- Wide contact surface on the 2.5" grindstone
- Durable grindstone 10" diameter
- Includes a special stone containing aluminium oxide to achieve the perfect grinding results in less time. Also ideal for HSS tools.
- Includes jig for straight edges, plane irons, chisels
- Abrasive paste for polishing workpiece after sharpening
- Includes angle setting jig for measuring exact angles and settings
- Adjustable shatter-proof water tank
- Removable leather honing wheel. After sharpening, it removes all burrs and creates a smooth and sharp edge.

VARIO SPEED

IN ORDER TO MAINTAIN AN EVEN GRINDING SPEED WITH A DECREASING GRINDSTONE DIAMETER, THE SPEED CAN BE ADJUSTED STEPLESSLY WITH THE SPEED CONTROLLER.





Ø 250 mm (10")	Ø 230 mm (9")	Ø 200 mm (8")	Ø 180 mm (7")
Speed	Speed	Speed	Speed
90 – 100 rpm	100 – 110 rpm	110 – 125 rpm	125 – 150 rpm

LOGISTICAL DATA

Weight net / gross	11 / 13 kg
Packaging dimensions	420 x 325 x 365 mm
Order No	5903203901
Barcode	4046664063667
20 Container	580 pcs
40 Container	1150 pcs
40 HQ Container	1370 pcs



SPECIFICATIONS

Dimensions L x W x H	450 x 270 x 340 mm
Grinding stone size Ø / width	250 x 63 mm
Stone grit	K 220
Material	top-quality grindstone with grinding grains of aluminium oxide
Leather honing wheel Ø / width	225 x 30 mm
Rotation speed	90 – 150 rpm
Motor	230 – 240 V~
Input	180 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 68

ACCESSORIES FOR WET SHARPENING SYSTEMS

	Description	Order Numbers
1 Jig 40	For grinding axes with a blade of up to 170 mm	89490712
2 Jig 55	Grinds oblique edges, hollow chisels, and planer blades	89490706
3 Jig 60	Suitable for knives from a minimum blade length of 40 mm to 100 mm, and for drawing knives	89490708
4 Jig 120	Suitable for knives with a blade length from 100 to 200 mm	89490709
5 Jig 160	For all straight scissors and hedge shears	89490710
6 Jig 320	Can be used for a variety of blade widths. Precise, smooth-running and maintenance-free friction bearing guide, hard anodized, fine-adjustment for grinding angles, maximum grinding length 320 mm	89490723
7 Jig 380	Can be used for a variety of blade widths. Precise, smooth-running and maintenance-free friction bearing guide, hard anodized, fine-adjustment for grinding angles, maximum grinding length 400 mm	89490724
8 Stone grader	Changes the grains for particularly fine abrasion, the other side making it rough again	89490707



















	Description	Order Numbers
9 Universal jig 70	Ensures a quick start to sharper work – designed for many straight standard tools	89490716
10 Grinding rest 110	The ideal extension of universal jig 70 – for tools that are difficult to clamp	89490718
11 Angle guide 200/250	Makes sure that you always have the correct angle for your tools	200: 89490717 250: 89490704
12 Calibration device	Ensures that the grinding wheel is always round and sharp through ultrahard stripping diamond	89490713
13 Leather honing wheel 100	For polishing hollow chisels and V-tool surfaces	89490705
14 Honing paste	For polishing your work piece after grinding	89490703
15 Wetgrind 200 For TIGER 2000S	Aluminium oxide grinding wheel Ø 200 x 40 x 12 mm, grit 220	89490715
16 Wetgrind 250 For TIGER 2500	Aluminium oxide grinding wheel Ø 250 x 50 x 12 mm, grit 220	89490701
17 Wetgrind 250XL For TIGER 3000VS	Aluminium oxide grinding wheel Ø 250 x 50 x 12 mm, grit 220	7903200701

9



10



11



12



13



14



15
16
17



KIT 1 / KIT 2 | ACCESSORY PACKAGE

HOUSEHOLD SHARPENING KIT



INCLUDED:

Jig 40:
For grinding axes with a blade of up to 170 mm

Jig 160:
For all straight scissors and hedge shears

Jig 120:
Suitable for knives with a blade length from 100 to 200 mm

Order No	7903200002

WOODTURNER'S SHARPENING KIT



INCLUDED:

Jig 55:
Grinds oblique edges, hollow chisels and planer blades

Grinding rest 110:
Ideal for tools that are difficult to clamp

Stone grader:
Changes the grains for particularly fine abrasion, the other side making it rough again

Order No	7903200001

PROMOTION KIT (SHARPENER & ACCESSORY KIT)



INDUCTION MOTOR

BG150



360°





BG200W



360°





BG150 | 6" BENCH GRINDER

WHETHER YOU'RE A DO-IT-YOURSELFER AT HOME OR A PROFESSIONAL ON THE JOB, YOUR TOOLS ARE IMPORTANT TO YOU. SHARPEN THEM WITH THIS POWERFUL BENCH GRINDER.

- Powerful 0.5 HP induction motor delivers smooth, accurate results
- Eye shields protect you from flying debris without obstructing your view
- Adjustable tool-rests extend the life of the grinding wheels
- Large, flexible work light with independent switch lets you choose when you need to illuminate your workspace
- Rough and smooth 150 mm discs

BG200W | 8" x 6" WET / DRY GRINDER

FINELY SHARPENED CUTTING TOOLS IMPROVE WORK STANDARDS, REQUIRE LESS EFFORT AND ARE OFTEN SAFER TO USE. THIS HEAVY DUTY WETSTONE GRINDER HELPS TO KEEP DRILL BITS, CHISELS AND SHEARS ETC IN TIP TOP CONDITION OFFERING BOTH DRY AND WET TREATMENTS TO OBTAIN THE SMOOTHEST OF FINISHES.

- Powerful 0.34 HP induction motor delivers smooth, accurate results
- Eye shield protects you from flying debris without obstructing your view
- Coolant tray for cooling heated material
- Adjustable tool-rests
- Coolant tray for cooling heated material
- 200 mm wheel for wetstone application

SPECIFICATIONS

	BG150	BG200W
Dimensions L x W x H	355 x 185 x 245 mm	435 x 260 x 288 mm
Disc size Ø / bore Ø	150 / 25 / 12.7 mm	150 / 20 / 12.7 mm
Wetstone Ø / bore Ø	–	200 / 40 / 20 mm
Sanding disc grit	K36 / K60	K60 / K80
Motor	230 – 240 V~	230 – 240 V~
Input	370 W	250 W

LOGISTICAL DATA

	BG150	BG200W
Weight net / gross	10 / 11 kg	11.5 / 13 kg
Packaging dimensions	440 x 255 x 280 mm	485 x 330 x 360 mm
Order No	4903104901	5903105903
Barcode	4014915082125	4046664037507
20 Container	560 pcs	500 pcs
40 Container	1127 pcs	1000 pcs
40 HQ Container	1288 pcs	1100 pcs

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 79

INDUCTION MOTOR

SM150LB

13 MM WIRE WHEEL

LED

PREFECT GRINDING RESULTS



Can be used for: rust removal, cleaning of metal and non-ferrous metal, preparation of soldering and welding work



SM150L



360°





SM150LB





360°



The **Scheppach SM150LB** has a grinding wheel and a **13 mm wire wheel brush.**

SPECIFICATIONS

	SM150L	SM150LB
Dimensions L x W x H	345 x 190 x 200 mm	345 x 190 x 200 mm
Disc size Ø / bore Ø	150 / 12.7 mm	150 / 12.7 mm
Sanding disc grit	K36 / K60	K36
Speed	2850 rpm	2850 rpm
Motor	230 – 240 V~	230 – 240 V~
Input	400 W	400 W

LOGISTICAL DATA

	SM150L	SM150LB
Weight net / gross	7 / 8.5 kg	7 / 8.5 kg
Packaging dimensions	390 x 251 x 238 mm	390 x 251 x 238 mm
Order No	5903107901	5903108901
Barcode	4046664064589	4046664064596
20 Container	1250 pcs	1250 pcs
40 Container	2500 pcs	2500 pcs
40 HQ Container	2860 pcs	2860 pcs

SM150L / SM150LB 6" BENCH GRINDER

THESE SCHEPPACH GRINDERS ARE IDEAL FOR ALL GRINDING, SHARPENING AND BUFFING TASKS. STANDARD EQUIPMENT INCLUDES A K36 AND K60 GRIT GRINDING DISCS AND WIRE WHEEL FOR MAXIMUM VERSATILITY. IDEAL FOR CLEANING AND PREPARATION FOR ALL SOLDERING AND WELDING PROJECTS IN ADDITION TO A VARIETY OF WORKSHOP JOBS WHERE A BENCH GRINDER PROVES INVALUABLE. INCORPORATING A CAST IRON BASE AND LED LIGHTS, THESE BENCH TOP GRINDER/POLISHERS ARE THE PERFECT WORKSHOP PARTNER FOR THE DISCERNING USER.

- Powerful 0.5 HP motor delivers smooth, accurate results
- Grinding / wire brush wheel diameter 150 mm
- Supplied with one coarse disc and one wire brush wheel (SM150LB) for general workshop grinding and sharpening of metals
- Eye shields protect you from flying debris without obstructing your view
- Built-in LED worklights over wheels keep work piece lit
- Cast-iron base with pre-drilled holes for quick and easy mounting to a benchtop
- Adjustable tool-rests extend the life of the grinding wheels
- Rubber feet for increased stability

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 79

INDUCTION MOTOR

SM200AL

40 MM WHITES-TONE

PERFECT GRINDING RESULTS

LED

CAST ALLOY BASE



SM200L



SM200AL



The **Scheppach SM200AL** has a coarse grinding wheel and a **40 mm wide whitestone with a fine grit.**

SPECIFICATIONS

	SM200L	SM200AL
Dimensions L x W x H	360 x 220 x 255 mm	410 x 260 x 290 mm
Disc size Ø / bore Ø	200 / 15.9 mm	200 / 20 mm
Sanding disc grit	K36 / K60	K36 / K100
Speed	2850 rpm	2850 rpm
Motor	230 – 240 V~	230 – 240 V~
Input	500 W	500 W

LOGISTICAL DATA

	SM200L	SM200AL
Weight net / gross	12 / 13.5 kg	13.5 / 14.5 kg
Packaging dimensions	423 x 320 x 292 mm	443 x 320 x 292 mm
Order No	5903109901	5903110901
Barcode	4046664064602	4046664064619
20 Container	632 pcs	616 pcs
40 Container	1302 pcs	1200 pcs
40 HQ Container	1450 pcs	1440 pcs

SM200L / SM200AL 8" BENCH GRINDER

THESE NEW SM200L AND SM200AL DOUBLE END BENCH GRINDERS ARE THE IDEAL TOOL FOR HOME AND LIGHT INDUSTRIAL WORKSHOPS. INCORPORATING A CAST ALLOY BASE AND LED LIGHTING, THEY ARE THE PERFECT CHOICE FOR THE DISCERNING USER. K36, K60 AND K100 GRINDING DISCS SATISFY VIRTUALLY ALL WORKSHOP REQUIREMENTS.

- Powerful 0.5 HP motor delivers smooth, accurate results
- Grinding / polishing wheel diameter 200 mm
- Eye shields protect you from flying debris without obstructing your view
- Medium and coarse wheels for a variety of materials
- Built-in LED worklights over wheels keep work piece lit
- Cast alloy base with pre-drilled holes for quick and easy mounting to a benchtop
- Adjustable tool-rests extend the life of the grinding wheels
- Rubber feet for increased stability

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 79

INDUCTION MOTOR



BG200AL

40 MM WHITE-STONE

BG200





360°

BG200AL



360°

The **Scheppach BG200AL** has a coarse grinding wheel and **40 mm wide whitestone with a fine grit.**







SPECIFICATIONS

	BG200	BG200AL
Dimensions L x W x H	440 x 280 x 340 mm	440 x 300 x 340 mm
Disc size Ø / bore Ø	200 / 15.88 mm	200 / 15.88 mm
Sanding disc grit	K36 / K60	K60 / K100
Motor	230 – 240 V~	230 – 240 V~
Input	550 W	550 W

LOGISTICAL DATA

	BG200	BG200AL
Weight net / gross	15.2 / 16.5 kg	16.5 / 18 kg
Packaging dimensions	430 x 285 x 350 mm	480 x 340 x 320 mm
Order No	4903105901	4903106901
Barcode	4014915082132	4014915082583
20 Container	560 pcs	560 pcs
40 Container	1127 pcs	1127 pcs
40 HQ Container	1288 pcs	1288 pcs

BG200 / BG200AL | 8" BENCH GRINDER

THE SCHEPPACH BENCH GRINDERS ARE PERFECT FOR A VARIETY OF PROJECTS, INCLUDING DEBURRING, RUST REMOVAL, SHAPING, POLISHING, GRADING AND SHARPENING OF YOUR CUTTING TOOLS. ITS POWERFUL MOTOR, THE ROBUST COMPACT METAL CONSTRUCTION AND THE PRECISE BALL BEARINGS CARE FOR THE SAFE AND DURABLE USE OF THIS DEVICE. IT FEATURES INTEGRATED RUBBER BUMPERS, ADJUSTABLE TOOL RESTS AND MAGNIFYING GLASS EYE SHIELDS.

- Powerful 0.75 HP induction motor provides superior power for almost all grinding applications
- Eye shields with magnifyer and adjustable spark reflectors for safe operation
- Adjustable work rests for wheel longevity and maximum grinding control
- Large, flexible work light with a separate switch allows you to illuminate your working area if you need it
- Coolant tray for cooling heated material
- Rough and smooth 200 mm wheels for coarse and fine grinding

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 79

INDUCTION MOTOR



OPTIONAL ACCESSORIES

SANDING BELT-SET

Order number: 7903303701
Barcode: 4014915098218

SPECIFICATIONS

Dimensions L x W x H	405 x 305 x 355 mm
Sanding belt length / width	686 / 50 mm
Belt speed	15 m/s
Motor	230 – 240 V~
Input	370 W

LOGISTICAL DATA

Weight net / gross	10 / 11.5 kg
Packaging dimensions	445 x 255 x 395 mm
Order No	4903303901
Barcode	4014915082149
20 Container	760 pcs
40 Container	1400 pcs
40 HQ Container	1500 pcs









BGS700 | 6" GRINDER / LINISHER

METAL GRINDING, DEBURRING, MOST PLASTICS AND NON-FERROUS METALS SANDING AND BUFFING JUST GOT A WHOLE LOT EASIER WITH THIS GRINDER / LINISHER.

- Powerful 0.5 HP induction motor
- Grinder Ø 150 mm
- Sanding belt size 50 x 686 mm
- Eye shields protect you from flying debris without obstructing your view
- Adjustable tool-rests extend the life of the grinding wheels
- Coolant tray for cooling heated material
- Adjustable eye protection shield, spark deflector, wheel guard and tool-rests

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 79

INDUCTION MOTOR



SPECIFICATIONS

Dimensions L x W x H	380 x 300 x 370 mm
Sanding belt length / width	762 / 25.4 mm
Belt speed	816 m/min
Sanding disc Ø	125 mm
Table size	150 mm (Linisher) 184 x 98 mm (Disc)
Table tilt	90 – 45° (Disc)
Motor	230 – 240 V~
Input	250 W

LOGISTICAL DATA

Weight net / gross	7.2 / 8.5 kg
Packaging dimensions	385 x 275 x 395 mm
Order No	4903304901
Barcode	4046664037712
20 Container	637 pcs
40 Container	1295 pcs
40 HQ Container	1480 pcs





BTS700 | 5" BELT AND DISC SANDER

COMPACT BENCH TOP BELT AND DISC SANDER INTENDED FOR THE SERIOUS MODEL MAKER, CRAFTSMEN, AND FOR GENERAL HOBBY WORK; THIS VERSATILE, COMBINED BELT AND DISC SANDER MAKES EASY WORK OF ACHIEVING A FINE AND SMOOTH FINISH ON COMPONENT PIECES MADE FROM WOOD, PLASTIC AND NON-FERROUS METAL.

- Induction motor delivers powerful, quiet, dependable performance
- The cast-iron base keeps the sander stable during use, so you can apply the desired amount of pressure and achieve consistent results
- The sanding discs are easily attached with the Velcro fastening system
- Variable transverse stop
- Sanding disc Ø 125 mm

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 79

INDUCTION MOTOR

Sieger Preis-Leistung
GUT (1,6)
Scheppach Bandschleifer und Tellerschleifer bts 800
Im Test: Tellerschleifer
Vergleich.org



360°

SPECIFICATIONS


Dimensions L x W x H	470 x 360 x 330 mm
Sanding belt length / width	915 / 100 mm
Sanding disc	150 mm
Table adjustment	90° – 45°
Belt speed	7.5 m/sec.
Sanding disc speed	2850 rpm
Suction connector Ø	63 mm
Motor	230 – 240 V~
Input	370 W

LOGISTICAL DATA

Weight net / gross	21.5 / 24.5 kg
Packaging dimensions	560 x 315 x 335 mm
Order No	4903302901
Barcode	4014915082095
20 Container	517 pcs
40 Container	1008 pcs
40 HQ Container	1008 pcs









BTS800 | 6" BELT AND DISC SANDER

MULTIFUNCTIONAL AND HANDY, THIS COMBINATION BELT AND DISC SANDER DELIVERS POWER TO MAKE ALMOST ANY SANDING PROJECTS MEET YOUR EXPECTATIONS.

- Induction motor delivers powerful, quiet, dependable performance
- The belt sander unit can be adjusted by 90° from vertical to horizontal position
- The sanding table, swinging through 45°, can variably be used for belt and disc sanding
- The cast-iron base keeps the sander stable during use, so you can apply the desired amounts of pressure and achieve consistent results
- The sanding discs are easily attached with the Velcro fastening system

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 79

INDUCTION MOTOR

360°



INCLUDED
3X SANDING DISCS AND 3X SANDING BELT



SPECIFICATIONS

Dimensions L x W x H	460 x 360 x 280 mm
Sanding belt length / width	915 / 100 mm
Sanding disc	150 mm
Table adjustment	0° – 45°
Belt speed	7.3 m/sec.
Sanding disc speed	2850 rpm
Suction connector Ø	63 mm
Motor	230 – 240 V~
Input	370 W

LOGISTICAL DATA

Weight net / gross	16.5 / 17.5 kg
Packaging dimensions	570 x 280 x 330 mm
Order No	5903306901
Barcode	4046664068396
20 Container	560 pcs
40 Container	1120 pcs
40 HQ Container	1270 pcs



BTS900 | 6" BELT AND DISC SANDER

THE COMBINED BELT- AND DISC SANDER SCHEPPACH BTS900 IS THE IDEAL TOOL TO MAKE ALMOST ANY SANDING PROJECTS MEET YOUR EXPECTATIONS. ITS POWERFUL, AND QUIET 370 WATT INDUCTION MOTOR PROVIDES A SMOOTH OPERATION. THE ADJUSTABLE SANDING TABLE AND THE 90° ADJUSTABLE BELT SANDER PROVIDE A MULTIPLICITY OF APPLICATIONS.

- Induction motor delivers powerful, quiet, dependable performance
- The belt sander unit can be adjusted by 90° from vertical to horizontal position
- The sanding table, swinging through 45°, can be used for belt and disc sanding
- The solid base keeps the sander stable during use, so you can apply the desired amounts of pressure and achieve consistent results
- The sanding discs are easily attached with the Velcro fastening system

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 79

selbst ist der Mann
Das Do-It-yourself-Magazin
SELBST AUSPROBIERT
RESULT: TTTTT
Rated as "VERY GOOD"
Edition 04/2013
www.selbst.de

360°







INCLUDED SANDING SLEEVES & RUBBER SANDING DRUMS

OSM100 | SPINDLE SANDER

SANDING DEEP AND WIDE WORK PIECES, FRONT EDGES, NARROW INNER CURVES, HORIZONTAL, VERTICAL, DIAGONAL, WITH OR ACROSS THE GRAIN: IT'S ALL PART OF THE DAILY WORK WITH THE SCHEPPACH OSM100.

- Lightweight for easy transport to the job site
- Powerful 450 W motor provides sufficient power in all applications.
- Rotating and oscillating action ensures exceptional finishing results.
- Heavy duty cast iron table for greater stability, accuracy and durability.
- Large table size provides greater material support.
- Dust collection port allows connection to dust collection equipment for a cleaner and safer working environment.
- Fully enclosed guarding provides maximum protection from the cut zone.

SPECIFICATIONS

Dimensions L x W x H	400 x 365 x 440 mm
Table size	370 x 290 mm
Speed	2000 rpm
Oscillation stroke	16 mm
Spindle Ø	12.7 mm
Motor	230 – 240 V~
Input	450 W

LOGISTICAL DATA

Weight net / gross	13.5 / 15 kg
Packaging dimensions	460 x 410 x 530 mm
Order No	4903401901
Barcode	4014915082101
20 Container	280 pcs
40 Container	560 pcs
40 HQ Container	660 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 79

selbst ist der Mann
Das Do-it-yourself-Magazin
SELBST AUSPROBIERT
RESULT: TTTTT
Rated as "VERY GOOD"
Edition 04/2019
www.selbst.de

360°



INCLUDED 5 x SANDING SLEEVES & 4 x RUBBER SANDING DRUMS

SPECIFICATIONS

Dimensions L x W x H	465 x 420 x 500 mm
Table size	410 x 425 mm
Speed	2000 rpm
Oscillation stroke	16 mm
Spindle Ø	13 / 19 / 26 / 38 / 51 mm
Motor	220 – 240 V~
Input	450 W

LOGISTICAL DATA

Weight net / gross	12.9 / 14.9 kg
Packaging dimensions	530 x 450 x 470 mm
Order No	5903405901
Barcode	4046664069447
20 Container	268 pcs
40 Container	550 pcs
40 HQ Container	675 pcs



OSM600 | SPINDLE SANDER

THE OSCILLATING BELT AND SPINDLE SANDER OSM600 FROM SCHEPPACH IS A PROFESSIONAL TOOL FOR A REASONABLE PRICE. NO MATTER IF YOU NEED IT FOR YOUR HOME WORKSHOP OR AS A PROFESSIONAL USER, THE SANDER WILL ALWAYS BE THE RIGHT DECISION. THE OSM600 IS THE BEST CHOICE FOR MODEL, FURNITURE OR INSTRUMENT BUILDING. THE OSCILLATION ENABLES ESPECIALLY SMOOTH SURFACES ON ALL WOOD WORK PIECES.


- Powerful 450 W engine with adequate load for all work pieces
- Rotating and oscillating belt and spindle for smooth surfaces
- Big alloy worktable for highest precision and stability at working with large work pieces
- Included five different size spindle sander and one belt sander
- 45° adjustable worktable for precise working

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 79

OSM100 / OSM600

	Description	Order Numbers	Barcode
Sanding sleeves 	Grit 80 Ø 13 / 19 / 26 / 38 / 51 / 76 mm (á 3 pcs)	7903400701	4014915098164
	Grit 120 Ø 13 / 19 / 26 / 38 / 51 / 76 mm (á 3 pcs)	7903400702	4014915098171
	Grit 240 Ø 13 / 19 / 26 / 38 / 51 / 76 mm (á 3 pcs)	7903400703	4014915098188
Sanding belt for OSM600	Grit 100 x 600 mm 80 / 100 / 120 mm (á 6 pcs)	7903400705	4046664071716

BTS800 / BTS900

	Description	Order Numbers	Barcode
Sanding belt / paper set – 12 pcs 	3 x sanding paper – grit 80	7903302601	4014915086642
	3 x sanding paper – grit 120		
	3 x sanding paper – grit 180		
	1 x sanding belt – grit 80		
	1 x sanding belt – grit 120		
	1 x sanding belt – grit 180		
Sanding paper-set 	Ø 150 mm – grit 80 (10 pcs)	88000208	4014915032472
	Ø 150 mm – grit 120 (10 pcs)	88000209	4014915032489
	Ø 150 mm – grit 180 (10 pcs)	88000220	4014915039976
Sanding belt-set 	914 x 100 mm – grit 80 (3 pcs)	88000211	4014915032502
	914 x 100 mm – grit 120 (3 pcs)	88000212	4014915032519
	914 x 100 mm – grit 180 (3 pcs)	88000221	4014915039983

BTS700

	Description	Order Numbers	Barcode
Sanding belt / paper set – 12 pcs 	3 x sanding paper – grit 80	3903301707	4046664026600
	3 x sanding paper – grit 120		
	3 x sanding paper – grit 180		
	1 x sanding belt – grit 60		
	1 x sanding belt – grit 100		
	1 x sanding belt – grit 180		
Sanding paper-set (Velcro) 	Ø 125 mm – grit 80 / grit 120 / grit 180 (á 3 pcs)	7903301701	4014915098195
Sanding belt-set 	762 x 25 mm – grit 60 / grit 100 / grit 180 (á 3 pcs)	7903301702	4014915098201

BGS700

	Description	Order Numbers	Barcode
Sanding belt-set 	686 x 50 mm – grit 60 (3 pcs)	7903303701	4014915098218
	686 x 50 mm – grit 120 (3 pcs)		
	686 x 50 mm – grit 180 (3 pcs)		

VARIABLE SPEED

VARIABLE SPEED 2000 – 9900 RPM











HG34 | 3" GRINDER-POLISHER

THIS COMPACT, YET POWERFUL VARIABLE SPEED BENCH GRINDER & POLISHER IS IDEAL FOR DIY AND SMALL WORKSHOP USE. INCLUDED WITH THE GRINDER IS A FLEXI DRIVE COMPLETE WITH A 100 PIECE TOOL KIT SUITABLE FOR CONVERTING THIS BENCH TOP TOOL INTO A UNIQUE MULTI-PURPOSE GRINDER, POLISHER AND SANDING TOOL.

- Variable speed 2000 – 9900 rpm
- Includes 100 pcs grinding kit containing flexible drive accessories for grinding, polishing and sanding
- Flexible drive kit for additional cutting, grinding & polishing away from the unit
- Eye shields protect you from flying debris without obstructing your view
- Grinding / polishing wheel diameter Ø 75 mm

SPECIFICATIONS

Dimensions L x W x H	245 x 190 x 180 mm
Disc size	75 mm
Speed	2000 – 9900 rpm
Motor	230 – 240 V~
Input	150 W

LOGISTICAL DATA

Weight net / gross	2.5 / 3.3 kg
Packaging dimensions	280 x 218 x 220 mm
Order No	5903106901
Barcode	4046664036555
20 Container	2000 pcs
40 Container	4200 pcs
40 HQ Container	4700 pcs



GS650

DRILL, CHISEL, KNIFE & SCISSOR SHARPENING

MULTI APP



360°



GS650 | MULTI TASK SHARPENER

A MULTI-SHARPENER CAN BE USED TO SHARPEN DRILL BITS, CHISELS, PLANES, KNIVES AND A VARIETY OF OTHER CUTTING TOOLS SO THAT THIS NIGHTMARE NEED NEVER BE LIVED AGAIN.

- Comes with 4 attachments (drilling, sharpening chisels, sharpening knives and scissors)
- This sharpener can be used to bring new life to any drill bit, chisel, planer or knife so that precision tool feeling can be felt once again
- 65 Watt motor gives ample power for all applications
- High speed grinding wheel ensures a fine, razor sharp finish on a range of implements
- Extremely effective on high-speed drill bits (3 – 10 mm)

DBS800

360°

FOR METAL DRILL BITS



DIAMOND DISC



DBS800 | DRILL BIT SHARPENER

THIS DRILL BIT SHARPENER GIVES BLUNT DRILL BITS A RAZOR SHARP CUTTING EDGE. IT WORKS ON BITS CONSTRUCTED OF STEEL, CARBIDE, COBALT AND MASONRY MATERIALS.

- Makes dull drill bits like new, in just 3 easy steps
- Diamond sharpening wheel provides hundreds of sharpenings
- Sharpens most popular metal drill bit types and sizes
- 80 Watt motor gives ample power for all applications
- Diamond grinding wheel ensures a fine, razor sharp finish on a range of implements
- Extremely effective on high-speed drill bits (3 – 13 mm)

SPECIFICATIONS

	GS650	DBS800
Dimensions L x W x H max.	200 x 154 x 130 mm	220 x 180 x 160 mm
Drill Ø	3 – 10 mm	3 – 13 mm
Grinding disc Ø	48 mm	79 mm
Knife / chisel width	6 – 51 mm	–
Speed	6700 rpm	4200 rpm
Motor	230 – 240 V~	230 V~
Input	65 W	80 W

LOGISTICAL DATA

	GS650	DBS800
Weight net / gross	1.9 / 2.2 kg	2.7 / 3.1 kg
Packaging dimensions	218 x 172 x 200 mm	230 x 190 x 165 mm
Order No	5903403901	5903404901
Barcode	4046664041467	4046664063957
20 Container	3100 pcs	2880 pcs
40 Container	6200 pcs	6320 pcs
40 HQ Container	7160 pcs	7232 pcs

VARIABLE SPEED



INCLUDED CONNECTION ADAPTER,
6 SANDING PAPERS, DUST BAG & HOSE

DS200 | DRYWALL SANDER

UPGRADE TO THE SCHEPPACH DRYWALL SANDING SOLUTION.
STOP SANDING DRYWALL BY HAND OR WITH SOME OTHER POORLY DESIGNED SOLUTION.

- Variable speed control for optimum sanding on various surfaces.
- The 215 mm sanding surface covers large areas in one pass
- The sanding discs are easily attached with the Velcro fastening system
- Powerful 1200 Watt motor
- Built-in dust collection bag
- Ergonomic design with many different holding options for fatigue-proof working
- Extensive accessories included: 1.5 m hose, 6 pcs sanding paper, connection adapter and dust bag

SPECIFICATIONS

Dimensions L x W x H	355 x 285 x 280 mm
Sanding paper Ø	215 mm
Speed	1500 – 3000 rpm
Dust collection Ø inner / outer	28 mm / 31 mm
Motor	230 – 240 V~
Input	1200 W

LOGISTICAL DATA

Weight net / gross	3.4 / 4.3 kg
Packaging dimensions	355 x 285 x 280 mm
Order No	5903802901
Barcode	4046664031529
20 Container	792 pcs
40 Container	1540 pcs
40 HQ Container	1856 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 87

VARIABLE SPEED

360°



2 IN 1






WOODEN FLOOR


WALL SURFACER


FLOOR WITH GLUE





SPECIFICATIONS

Dimensions L x W x H	450 x 270 x 210 mm
Round sanding paper Ø	215 mm
Delta sanding paper	280 x 280 x 280 mm
Round disc speed	1000 – 2000 rpm
Delta disc speed	3000 – 6000 rpm
Sanding motion	gear driven
Dust collection Ø inner / outer	30 mm / 40 mm
Motor	230 V~
Input	750 W

LOGISTICAL DATA

Weight net / gross	3.8 / 8.4 kg
Packaging dimensions	450 x 450 x 185 mm
Order No	5903803901
Barcode	4046664035565
20 Container	700 pcs
40 Container	1250 pcs
40 HQ Container	1600 pcs



DS210 | DRYWALL / TRI-ANGLE SANDER

WHETHER YOU ARE SANDING JOINTS IN PLASTERBOARD OR REMOVING OLD FINISHES, THIS PURPOSE-MADE, SCHEPPACH PLASTER-SANDER TACKLES THE JOB UP TO FOUR TIMES FASTER THAN CONVENTIONAL METHODS.

- Supplied with round sanding and triangular sanding heads in a moulded plastic case
- Variable speed control for optimum sanding on various surfaces
- The round Ø 215 mm sanding surface and 280 x 280 x 280 mm delta pad covers large areas in one pass
- The sanding discs are easily attached with the Velcro fastening system
- Powerful 750 Watt motor
- Ergonomic design with many different holding options for fatigue-proof working
- Extensive accessories included: 4 m soft tube, 6 pcs round sanding paper, 6 pcs delta sanding paper and box

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 87


VARIABLE SPEED

360°




DRYWALL


WALL SURFACER


FLOOR WITH GLUE

SPECIFICATIONS

Dimensions L x W x H L x B x H	1400 – 1650 x 270 x 300 mm
Round sanding paper Ø	215 mm
Delta sanding paper	282 x 282 x 282 mm
Round disc speed	1200 – 2500 rpm
Delta disc speed	3500 – 7500 rpm
Dust collection Ø inner / outer	45 mm / 50 mm
Motor	230 – 240 V~
Input	710 W



INCLUDED 12 DELTA AND 12 ROUND SANDING PAPERS, CONNECTION ADAPTER, HOSE & BAG

LOGISTICAL DATA

Weight net / gross	4.5 / 8.9 kg
Packaging dimensions	735 x 286 x 265 mm
Order No	5903805901
Barcode	4046664044550
20 Container	415 pcs
40 Container	890 pcs
40 HQ Container	1050 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 87

2 IN 1

DS930 | DRYWALL / TRI-ANGLE SANDER

THE NEW SCHEPPACH DS930 DRYWALL / TRI-ANGLE SANDER IS THE PERFECT TOOL FOR SANDING WALLS AND CEILINGS. THE TILTING SANDING HEADS MAKE EVERY PROJECT MUCH EASIER WHETHER ON WALLS OR CEILINGS. WHEN EQUIPPED WITH THE STANDARD TRI-ANGLE SANDING HEAD EVEN THOSE SEEMINGLY AWKWARD AND INACCESSIBLE CORNERS AND EDGES BECOME EASY TO SAND TO PERFECTION. EQUIPPED WITH A TELESCOPIC HANDLE THE DS930 IS EASY TO TRANSPORT AND STORE WHEN NOT IN USE.


- Supplied with round sanding and triangular sanding heads
- Variable speed control for optimum sanding on various surfaces
- The round Ø 215 mm sanding surface and 282 x 282 x 282 mm delta pad covers large areas in one pass
- The sanding discs are easily attached with the Velcro fastening system
- Powerful 710 Watt motor
- Thanks to the telescopic function, corners which are difficult to access can also be easily processed
- Ergonomic design with many different holding options for fatigue-proof working
- Sanding of ceilings and removing wallpaper residues, paint, loose plaster, etc.
- Extensive accessories included: LED-light, 4 m hose with 2 connection adapters, bag, 12 pcs round sanding papers and 12 pcs delta sanding papers



LED











OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 87

VARIABLE SPEED

360°

LED

DS920 | DRYWALL SANDER

SCHEPPACH ELECTRIC VARIABLE SPEED DRYWALL SANDER IS DESIGNED TO HELP SAND LARGER AND HARD TO REACH AREAS THAT WOULD BE TOO CUMBERSOME, TIME CONSUMING AND DIFFICULT TO SAND USING A TRADITIONAL HAND SANDER.

- Variable speed control for optimum sanding on various surfaces.
- The 225 mm sanding surface covers large areas in one pass
- The sanding discs are easily attached with the Velcro fastening system
- Powerful 710 Watt motor
- Thanks to the telescopic function, corners which are difficult to access can also be easily processed
- Ergonomic design with many different holding options for fatigue-proof working
- Extensive accessories included: 4 m hose, 6 pcs sanding paper and 2 connection adapters
- The tiltable sanding head makes your work easier and allows you to work overhead











INCLUDED 6 SANDING PAPERS, CONNECTION ADAPTER & HOSE

SPECIFICATIONS

Dimensions L x W x H	1450 – 1700 x 245 x 260 mm
Sanding paper	225 mm
Speed	700 – 1700 rpm
Sanding motion	gear driven
Dust collection Ø inner / outer	45 mm / 50 mm
Motor	230 – 240 V~
Input	710 W


LOGISTICAL DATA

Weight net / gross	4.5 / 6.5 kg
Packaging dimensions	720 x 290 x 265 mm
Order No	5903804901
Barcode	4046664037514
20 Container	490 pcs
40 Container	1000 pcs
40 HQ Container	1260 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 87

DS210 / DS930

	Description	Order Numbers	Barcode
Round sanding paper Ø 215 mm 	Grit 80 (10 pcs)	5903802701	4046664031574
	Grit 100 (10 pcs)	5903802702	4046664031581
	Grit 120 (10 pcs)	5903802703	4046664031598
	Grit 150 (10 pcs)	5903802704	4046664031635
	Grit 180 (10 pcs)	5903802705	4046664031611
	Grit 240 (10 pcs)	5903802706	4046664031628
Triangle sanding paper 280 x 280 x 280 mm 	Grit 80 (10 pcs)	7903800601	4046664035749
	Grit 100 (10 pcs)	7903800602	4046664035756
	Grit 120 (10 pcs)	7903800603	4046664035763
	Grit 150 (10 pcs)	7903800604	4046664035770
	Grit 180 (10 pcs)	7903800605	4046664035787
	Grit 240 (10 pcs)	7903800606	4046664035794





DS200 / DS920

	Description	Order Numbers	Barcode
Round sanding paper Ø 215 mm 	Grit 80 (10 pcs)	5903802701	4046664031574
	Grit 100 (10 pcs)	5903802702	4046664031581
	Grit 120 (10 pcs)	5903802703	4046664031598
	Grit 150 (10 pcs)	5903802704	4046664031635
	Grit 180 (10 pcs)	5903802705	4046664031611
	Grit 240 (10 pcs)	5903802706	4046664031628





SPLITTNG LENGTH UP TO 370 MM

4 T



360°

Safety cage against splintering wood

OPTIONAL ACCESSORIES

HYDRAULIC OIL
1 litre

Order number: 16020280
Barcode: 4014915037583

HYDRAULIC OIL
5 litre



Order number: 16020281
Barcode: 4014915037590

VARIABLE STROKE ADJUSTMENT

HL460 | 4 T LOG SPLITTER

THE SCHEPPACH HL460 – 4 TON ELECTRIC LOG SPLITTER IS A GREAT ADDITION TO ANY HOME. IDEAL FOR THE FIREPLACE, WOOD BURNING STOVE AND OUTDOOR FIRE PIT.

- Splitting up to 100 logs per hour, its safe, silent operation will split green wood logs or seasoned timbers effortlessly
- 4 tons of splitting ram power
- Log splitter capacity 370 mm x Ø 250 mm
- Powerful 2.0 HP motor
- Hydraulic cylinder with auto return
- Manufactured to the highest European quality and safety standards the Scheppach log splitter will give years of trouble-free use
- Two handed operation keeps hands clear of action while operating
- This machine requires minimal storage
- Safety cover in the splitting zone
- Storage table for split wood

SPECIFICATIONS

Splitting power max.	4 t
Wood Ø min – max.	55 – 250 mm
Wood length max.	370 mm
Hydraulic fluid capacity	2.4 L
Operating pressure	160 bar
Motor	230 V~ / 50 Hz
Input	1500 W

LOGISTICAL DATA

Weight net / gross	45 / 48.5 kg
Packaging dimensions	790 x 325 x 510 mm
Order number	5905209901
Barcode	4046664071440
20 Container	208 pcs
40 Container	420 pcs
40 HQ Container	525 pcs



SPLITTNG LENGTH UP TO 520 MM

Safety cage against splintering wood

VARIABLE STROKE ADJUSTMENT

6.5 T



OPTIONAL ACCESSORIES

HYDRAULIC OIL
1 litre



Order number: 16020280
Barcode: 4014915037583

HYDRAULIC OIL
5 litre



Order number: 16020281
Barcode: 4014915037590

360°





INCLUDED STAND WITH TRANSPORT WHEELS (HL660)

SPECIFICATIONS

	HL660	HL660o
Dimensions L x W x H	1160 x 425 x 610 mm	1160 x 425 x 610 mm
Splitting power max.	6.5 t	6.5 t
Wood-Ø min. – max.	50 – 250 mm	55 – 250 mm
Wood length max.	520 mm	520 mm
Hydraulic fluid capacity	3.5 L	2.4 L
Operating pressure	208 bar	160 bar
Motor	230 V~ / 50 Hz	230 V~ / 50 Hz
Input	2200 W	2200 W

LOGISTICAL DATA

	HL660	HL660o
Weight net / gross	64 / 68.6 kg	59 / 63 kg
Packaging dimensions	950 x 320 x 500 mm	950 x 325 x 510 mm
Order number	5905211901	5905213901
Barcode	4046664071464	4046664072119
20 Container	168 pcs	168 pcs
40 Container	344 pcs	352 pcs
40 HQ Container	430 pcs	440 pcs

HL660 / HL660o | 6.5 T SPLITTER

CUT FIREWOOD FOR THE WINTER WITH LITTLE EFFORT AND IN LESS THAN NO TIME WITH THESE NEW SCHEPPACH-BRANDED LOG SPLITTERS. THANKS TO THEIR 6.5 T SPLITTING FORCE, THESE MACHINES ARE SUITABLE FOR SPLITTING LARGE LOGS TOO.

- Splitting up to 100 logs per hour, its safe, silent operation will split green wood logs or seasoned timbers effortlessly
- 6.5 tons of splitting ram power
- Wood length up to 52 cm (HL660o), Ø 25 cm
- Hydraulic cylinder with auto return
- Stable torsion – resistant steel construction
- Robust splitting knife
- Powerful 3.0 HP motor
- Variable stroke adjustment
- Two handed operation keeps hands clear of action while operating
- This machine requires minimal storage
- Safety cover in the splitting zone
- Storage table for split wood
- Included stand with wheels

MAX. SPLITTING LENGTH 550 MM

HL730 | 7 T LOG SPLITTER

THE TIME-SAVING WAY TO SPLIT FIREWOOD. SCHEPPACH´S LOG SPLITTER HL730 FEATURES 7 TONS SPLITTING POWER FOR EASY AND FAST OPERATION.

- Powerful 7 tons splitting power
- Suitable for soft- and hardwood
- Stroke 495 mm
- Wheels for easy transportation
- Two handed operation for enhanced safety
- Torsion-resistant powder-coated steel construction
- Split wood catcher on both sides
- Split wood tray on both sides



7 T

Mutual wood catcher





OPTIONAL ACCESSORIES

HYDRAULIC OIL
1 litre

Order No: 16020280
Barcode: 4014915037583

HYDRAULIC OIL
5 litre

Order No: 16020281
Barcode: 4014915037590

SPECIFICATIONS

Splitting power max.	7 t	
Splitting length min. – max.	100 – 550 mm	
Stroke	495 mm	
Motor	230 V~ / 50 Hz	400 V / 50 Hz
Input	3000 W	2100 W

LOGISTICAL DATA

Weight net / gross	98.2 / 103.5 kg	97.5 / 102.5 kg
Packaging dimensions	550 x 345 x 1035 mm 550 x 345 x 1150 mm (with palette)	
Order No	5905309901 (230 V~)	5905309902 (400 V)
Barcode	4046664071471	4046664071501
20 Container	124 pcs	
40 Container	252 pcs	
40 HQ Container	252 pcs	

SPLITTNG LENGTH UP TO 550 MM

Mutual wood catcher

HL810 | 8 T LOG SPLITTER

A LARGE, VERTICAL, ELECTRIC LOG SPLITTER WITH 8 TONS OF SPLITTING PRESSURE.

- Generates up to 8 tons of splitting pressure
- Splits all kinds of wood, hard or soft
- Cylinder stroke 550 mm
- Large wheels and a carriage device provides mobility
- An exceptionally high safety standard by virtue of the two handed operating system
- Stable torsion – resistant steel construction
- Mutual wood catcher

8 T



OPTIONAL ACCESSORIES

HYDRAULIC OIL
1 litre



Order number: 16020280
Barcode: 4014915037583

HYDRAULIC OIL
5 litre



Order number: 16020281
Barcode: 4014915037590





SPECIFICATIONS

Dimensions L x W x H	845 x 935 x 1500 mm	
Splitting power max.	8 t	
Splitting length min. – max.	100 – 550 mm	
Stroke	550 mm	
Motor	230 V~ / 50 Hz	400 V / 50 Hz
Input	3000 W	3500 W

LOGISTICAL DATA

Weight net / gross	109.9 / 117 kg	108.8 / 115.9 kg
Packaging dimensions	560 x 400 x 1040 mm 560 x 400 x 1150 mm (with palette)	
Order No	5905310901	5905310902
Barcode	4046664071488	4046664071495
20 Container	112 pcs	
40 Container	224 pcs	

SPLITTNG LENGTH UP TO 1060 MM

HL1020 | 10 T LOG SPLITTER

THE SAFE, EASY AND QUICK WAY TO SPLIT LOGS. BIGGER CYLINDER, BIGGER MOTOR! USE FOR CONSISTENT AND ACCURATE SIZING OF LOGS.

- Generates up to 10 tons of splitting pressure
- Splits all kinds of wood, hard and soft
- An exceptionally high safety standard by virtue of the two handed operating system
- Stable torsion – resistant steel construction
- Powerful 3.3 kW motor
- The lower ground plate is positioned purposely for easy loading
- Safety gear on each side
- Included log lifter

10 T



OPTIONAL ACCESSORIES

HYDRAULIC OIL
1 litre



Order No: 16020280
Barcode: 4014915037583

HYDRAULIC OIL
5 litre



Order No: 16020281
Barcode: 4014915037590

SPECIFICATIONS

Dimensions L x W x H	1030 x 990 x 2370 mm	
Splitting power max.	10 t	
Wood length max.	1060 mm	
Wood diameter max.	70 – 400 mm	
Oil capacity	9 L	
Motor	230 V~ / 50 Hz	400 V / 50 Hz
Input	3700 W	3700 W

LOGISTICAL DATA

Weight net / gross	168 / 175 kg	173 / 181 kg
Packaging dimensions	735 x 380 x 1770 mm (without pallet) 735 x 380 x 1870 mm (with pallet)	
Order	5905313901	5905313902
Barcode	4046664073093	4046664071969
40 HQ Container	99 pcs	

SPLITTNG LENGTH UP TO 1060 MM

HL1300 | 12 T LOG SPLITTER

THE HL1300 IS A RELIABLE 12 TON LOG SPLITTER, ALLOWING YOU TO SUCCESSFULLY SPLIT LONG PIECES OF HARDWOOD IN NO TIME. THIS STURDY 178 KG WARP-RESISTANT STEEL MACHINE IS ALSO EQUIPPED WITH A LOWER GROUND PLATE FOR EASY LOADING.

- Generates up to 12 tons of splitting pressure
- Suitable for cutting soft and hardwood up to 1060 mm in a fast and safe way
- Variably adjustable splitting length
- An exceptionally high safety standard by virtue of the two handed operating system
- Stable torsion – resistant steel construction
- Powerful 4000 W motor
- The lower ground plate is positioned purposely for easy loading
- Both sided safety gear
- Including log lifter

12 T



OPTIONAL ACCESSORIES

HYDRAULIC OIL
1 litre



Order No: 16020280
Barcode: 4014915037583

HYDRAULIC OIL
5 litre



Order No: 16020281
Barcode: 4014915037590

SPECIFICATIONS

Dimensions L x W x H	1040 x 1000 x 2400 mm
Splitting power max.	12 t
Wood length max.	1060 mm
Wood diameter max.	70 – 400 mm
Oil capacity	10 L
Motor	400 V / 50 Hz
Input	4000 W

LOGISTICAL DATA

Weight net / gross	188 / 198 kg
Packaging dimensions	770 x 380 x 1800 mm 770 x 380 x 1900 mm (with pallet)
Order	5905414902
Barcode	4046664071570
40 HQ Container	99 pcs

SPLITTNG LENGTH UP TO 1060 MM

HL1450 | 14 T LOG SPLITTER

THE SAFE, EASY AND QUICK WAY TO SPLIT LOGS. BIGGER CYLINDER, BIGGER MOTOR! USE FOR CONSISTENT AND ACCURATE SIZING OF LOGS. IDEAL FOR TRADE USE.

- Generates up to 14 tons of splitting pressure
- Splits effortlessly through timbers up to 1060 mm long in limitless quantities
- Variably adjustable splitting length
- The two handed operation offers an exceptionally high safety standard
- Stable torsion – resistant, powder coated steel construction
- Powerful 4.3 kW motor
- The lower ground plate is positioned purposely for easy loading
- Safety gear both sides
- Included log lifter

14 T



OPTIONAL ACCESSORIES

HYDRAULIC OIL
1 litre



Order No: 16020280
Barcode: 4014915037583

HYDRAULIC OIL
5 litre



Order No: 16020281
Barcode: 4014915037590

SPECIFICATIONS

Dimensions L x W x H	1040 x 1000 x 2400 mm
Splitting power max.	14 t
Wood length max.	1060 mm
Wood diameter max.	70 – 400 mm
Oil capacity	10 L
Motor	400 V / 50 Hz
Input	4300 W

LOGISTICAL DATA

Weight net / gross	210 / 218 kg
Packaging dimensions	770 x 380 x 1800 mm (without pallet) 770 x 380 x 1900 mm (with pallet)
Order	5905314902
Barcode	4046664071976
40 HQ Container	99 pcs

SPLITTNG LENGTH UP TO 1100 MM

HL1600M / HL1600G / HL1600GM
16 T LOG SPLITTERS

THE 16 T SCHEPPACH LOG SPLITTER IS THE IDEAL TOOL FOR ALL THOSE WHO WANT TO HANDLE LARGE QUANTITIES OF WOOD. THE MACHINE COMES EITHER WITH A 400V MOTOR OR WITH A COMBINATION OF THIS MOTOR AND PTO. SO EVEN USE IN A FOREST IS NOT A PROBLEM. THE INCLUDED LOG LIFTER LIFTS EVEN HEAVY LOGS WITHOUT ANY PROBLEM AND THE UNIT WILL EASILY COPE WITH 1100MM LOGS.

- **Available as a combination of drive shaft and electric motor or as drive shaft only**
- Generates up to 16 tons of splitting pressure
- Splits wood in any length up to 1100 mm
- The lower ground plate is positioned purposely for easy loading
- Variably adjustable splitting length
- Large wheels and a carriage device provide mobility
- Owing to the lowered cylinder and the foldable supporting arms, the log splitters are easy to transport and store away neatly
- Exceptionally high safety standard by virtue of the two handed operating system
- Three-point linkage mounting for easy transport by tractor
- Stable torsion – resistant, powder coated steel construction
- Safety gear both sides
- Included log lifter

16 T



SPECIFICATIONS

	HL1600M (Motor)
Splitting power max.	16 t
Wood length max.	1100 mm
Cylinder rise	948 mm
Forward speed 1 / 2	14.2 / 4.6 cm/s
Return speed	6.4 cm/s
Motor	400 V
Input	4500 W

LOGISTICAL DATA

	HL1600M (Motor)	
Weight net / gross	256 / 267 kg	
Packaging dimensions	780 x 570 x 2000	
Order No	5905315902	
Barcode	4046664071983	
20 Container	20 pcs	
40 Container	43 pcs	
40 HQ Container	43 pcs	
	HL1600G (PTO)	**HL1600GM (Motor & PTO)**
Order No	5905508903	5905508902
Barcode	4046664071990	4046664072003

SPLITTNG LENGTH UP TO 1100 MM

18 T



HL1900M / HL1900G / HL1900GM 18 T LOG SPLITTERS

THIS 18 T LOG SPLITTER FROM SCHEPPACH IS THE RIGHT CHOICE IF YOU NEED TO SPLIT LARGE QUANTITIES OF WOOD BEYOND PRIVATE CONSUMPTION. WITH THE TWO SPEED SYSTEM, LOGS UP TO A LENGTH OF 1100 MM ARE PROCESSED FAST AND SAFELY. IT CAN BE DRIVEN BY THE ELECTRIC MOTOR OR BY A TRACTOR VIA DRIVE SHAFT. THE LOG LIFTER SUPPORTS YOU WITH RAISING LARGE AND HEAVY TRUNKS.

- **Available as a combination of drive shaft and electric motor or as drive shaft only**
- Generates up to 18 tons of splitting pressure
- Splits wood in any length up to 1100 mm
- The lower ground plate is positioned purposely for easy loading
- Variably adjustable splitting length
- Large wheels and a carriage device provide mobility
- Owing to the lowered cylinder and the foldable supporting arms, the log splitters are easy to transport and stored away neatly
- Exceptionally high safety standard by virtue of the two handed operating system
- Three-point linkage mounting for easy transport by tractor
- Stable torsion – resistant, powder coated steel construction
- Safety gear both sides
- Included log lifter

SPECIFICATIONS

	HL1900GM (Motor & PTO)
Dimensions L x W x H	1540 x 1140 x 2520 mm
Splitting power max.	18 t
Wood length max.	560 – 1100 mm
Cylinder rise	94.5 cm
Forward speed 1 / 2	Motor: 10 / 4.8 cm/s PTO: 13.5 / 5.9 cm/s
Return speed	Motor: 7.8 cm/s PTO: 10.6 cm/s
Motor	400 V + PTO
Input	5100 W

LOGISTICAL DATA

	HL1900GM (Motor & PTO)	
Weight net / gross	323.8 / 333.8 kg	
Packaging dimensions	940 x 680 x 2000 mm	
Order No	5905506902	
Barcode	4046664071617	
20 Container	20 pcs	
40 Container	42 pcs	
40 HQ Container	42 pcs	
	HL1900M (Motor)	HL1900G (PTO)
Order No	5905506904	5905506903
Barcode	4046664072010	4046664071600

SPLITTNG LENGTH UP TO 1100 MM

22 T



HL2200G / HL2200GM
22 T LOG SPLITTERS

THE POWERFUL 22 T SCHEPPACH LOG SPLITTER HANDLES EVEN THE HARDEST WOOD. DEPENDING ON THE MODEL, THE LOG SPLITTER COMES EITHER WITH A 400V MOTOR OR A COMBINATION OF THE 400V MOTOR AND PTO. WITH THIS COMBINATION, THE LOG SPLITTER IS VERY ADAPTABLE AND CAN EVEN BE USED IN A FOREST, WITHOUT ANY ELECTRICAL POWER SUPPLY. BECAUSE OF THE MAXIMUM SPLITTING LENGTH OF 1100MM, EVEN LARGE LOGS CAN BE LIFTED USING THE LOG LIFTER AND SPLIT WITHOUT EFFORT.

- **Available as a combination of drive shaft and electric motor or as drive shaft only**
- Generates up to 22 tons of splitting pressure
- Splits wood in any length up to 1100 mm
- The lower ground plate is positioned purposely for easy loading
- Variably adjustable splitting length
- Large wheels and a carriage device provide mobility
- Owing to the lowered cylinder and the foldable supporting arms, the log splitters are easy to transport and stored away neatly
- Exceptionally high safety standard by virtue of the two handed operating system
- Three-point linkage mounting for easy transport by tractor
- Stable torsion – resistant, powder coated steel construction
- Safety gear both sides
- Included log lifter

SPECIFICATIONS

	HL2200GM (Motor & PTO)
Splitting power max.	22 t
Wood length max.	1100 mm
Cylinder rise	948 mm
Forward speed 1 / 2	Motor: 10,5 / 4,3 cm/s PTO:13,1 / 5,3 cm/s
Return speed	Motor: 7,5 cm/s PTO: 9,3 cm/s
Motor	400 V + PTO
Input	5100 W

LOGISTICAL DATA

	HL2200GM (Motor & PTO)
Weight net / gross	319 / 320 kg
Packaging dimensions	940 x 680 x 1900 940 x 680 x 2000 (with pallet)
Order No	5905509902
Barcode	4046664072034
20 Container	20 pcs
40 Container	42 pcs
40 HQ Container	42 pcs
	HL2200G (PTO)
Order No	5905509903
Barcode	4046664072027

SPLITTNG LENGTH UP TO 1100 MM

HL2600G / HL2600GM
25 T LOG SPLITTERS

MEET THE ULTIMATE LOG-SPLITTING MACHINE. WITH AN INTIMIDATING 25 TONS OF CRUSHING FORCE, EVEN THE HARDEST WOODS COME APART WITH EASE - AND FAST - WHEN OPERATING SCHEPPACH HL2500G (HL2500GM).

- **Available as a combination of drive shaft and electric motor or as drive shaft only**
- Generates up to 25 tons of splitting pressure
- Splits wood in any length up to 1100 mm
- The lower ground plate is positioned purposely for easy loading
- Variably adjustable splitting length
- Large wheels and a carriage device provide mobility
- Owing to the lowered cylinder and the foldable supporting arms, the log splitters are easy to transport and stored away neatly
- Exceptionally high safety standard by virtue of the two handed operating system
- Three-point linkage mounting for easy transport by tractor
- Stable torsion – resistant, powder coated steel construction
- Safety gear both sides
- Included log lifter

25 T



SPECIFICATIONS

	HL2600GM (Motor & PTO)
Splitting power max.	25 t
Wood length max.	1100 mm
Cylinder rise	94.8 cm
Forward speed 1 / 2	Motor: 13.5 / 4.9 cm/s PTO: 15 / 5.5 cm/s
Return speed	Motor: 7.6 cm/s PTO: 7.8 cm/s
Motor	400 V + PTO
Input	5500 W

LOGISTICAL DATA

	HL2600GM (Motor & PTO)
Weight net / gross	362 / 386 kg
Packaging dimensions	940 x 680 x 2000 mm
Order No	5905507902
Barcode	4046664071631
20 Container	20 pcs
40 Container	41 pcs
40 HQ Container	41 pcs
	HL2600G (PTO)
Order No	5905507903
Barcode	4046664071624

SPLITTNG LENGTH UP TO 1100 MM

30 T

HL3000G / HL3000GM
30 T LOG SPLITTERS

THIS POWERFUL WOOD SPLITTER IS THE IDEAL SOLUTION FOR HEAVY-DUTY TASKS. INDEED, THE MACHINE FEATURES A 30 TON SPLITTING FORCE AND A 1100 MM SPLITTING LENGTH TO DELIVER GREAT RESULTS, EVEN ON DRY HARDWOOD. THIS IS AVAILABLE AS A SHAFT-DRIVEN OR AS A COMBINATION OF A 400V ELECTRIC MOTOR AND SHAFT-DRIVEN SPLITTER.THE LOG SPLITTER COMES WITH A LOG LIFTER FOR EFFORTLESS WORK.

- Available as a combination of shaft-driven and electric motor splitter or as a shaft-driven splitter only
- 30 ton splitting power
- Splitting length up to 1100 mm
- Lower ground plate for simple log loading
- Large wheels, lowered cylinder and foldable supporting arms for easy transportation
- Variably adjustable splitting length
- Two-handed operating system for enhanced safety
- Three-point linkage for transportation by tractor
- Torsion-resistant, power-coated steel construction
- Safety gear and log lifter included



SPECIFICATIONS

	HL3000GM (Motor & PTO)
Splitting power max.	30 t
Wood length max.	1100 mm
Cylinder rise	948 mm
Forward speed 1 / 2	Motor: 12.5 / 3.,7 cm/s PTO: 21.5 / 5.7 cm/s
Return speed	Motor: 6.7 cm/s PTO: 10.4 cm/s
Motor	400 V + PTO
Input	5500 W

LOGISTICAL DATA

	HL3000GM (Motor & PTO)
Weight net / gross	373.1 / 386.1 kg
Packaging dimensions	970 x 680 x 2000 mm
Order No	5905510902
Barcode	4046664072058
20 Container	20 pcs
40 Container	41 pcs
40 HQ Container	41 pcs
	HL3000G (PTO)
Order No	5905510903
Barcode	4046664072041

2200 W



With patented PROTECTIVE COVER according to latest regulation

CUTTING HEIGHT UP TO



SPECIFICATIONS

Dimensions L x W x H	1002 x 737 x 1046 mm
Saw blade Ø	405 mm
Cutting Ø max.	140 mm
Cutting length min. / max.	300 – 1000 mm
Cutting speed	2800 rpm
Motor	230 V~
Input	2200 W

LOGISTICAL DATA

Weight net / gross	39 / 43 kg
Packaging dimensions	1075 x 776 x 247 mm
Order No	5905101901
Barcode	4046664071662
20 Container	150 pcs
40 Container	330 pcs
40 HQ Container	363 pcs

HS410 | 405 MM LOG SAW

THE WINTER WILL LOSE ALL ITS SEVERITY IN YOUR EYES, IF YOU PROVIDE YOUR HOUSEHOLD WITH THIS NEW ROCKER CIRCULAR CUT LOG SAW. DESIGNED TO TAKE THE STRAIN AND EFFORT OUT OF CUTTING LOGS AND FIREWOOD. THIS LOG SAW ALLOWS THE OPERATOR TO WORK MORE SAFELY AND AT A COMFORTABLE HEIGHT. IT IS COMPACT AND EXTREMELY RIGID.

- Rugged welded steel construction for long service life
- Huge cutting capacity
- Including length stop
- With its 405 mm TCT saw blade it is optimally capable of sawing branches and trunks
- Stable, torsion free steel frame and swivel
- By using the protective cover, the risk of injury is virtually impossible. When the protective cover is opened, the safeguard makes accidental sawing impossible.

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

HS510 | 505 MM LOG SAW

THE SCHEPPACH HS510 IS AN EXTREMELY STURDY, POWERFUL AND COMFORTABLE FIREWOOD ROCKER CIRCULAR CUT LOG SAW, WITH MANY SAFETY FEATURES. DESIGNED TO TAKE THE STRAIN AND EFFORT OUT OF CUTTING LOGS AND FIREWOOD. THIS LOG SAW ALLOWS THE OPERATOR TO WORK MORE SAFELY AND AT A COMFORTABLE HEIGHT. IT IS COMPACT AND EXTREMELY RIGID.

- Rugged welded steel construction for long service life
- Huge cutting capacity
- Includes extension
- With its 505 mm TCT saw blade it is capable fof sawing branches and trunks
- Stable, torsion free steel frame and swivel
- All-steel construction ensures long lifetime
- Pre-assembled
- By using the protective cover, the risk of injury is virtually impossible. When the protective cover is opened, the safeguard makes accidental sawing impossible.
- Cuts multiple logs at one stroke

3000 W









LOGISTICAL DATA	
Weight net / gross	65 / 83 kg
Packaging dimensions	790 x 780 x 1135 mm
Order No	5905113901
Barcode	4046664071655
20 Container	42 pcs
40 Container	90 pcs
40 HQ Container	90 pcs

SPECIFICATIONS	
Dimensions L x W x H	1025 x 809 x 1015 mm
Saw blade Ø	505 mm
Cutting Ø max.	170 mm
Cutting length min. / max.	200 – 1000 mm
Cutting speed	2800 rpm
Motor	230 V~
Input	3000 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

PROFESSIONAL

4500 W

HS730 | 700 MM LOG SAW

WITH THIS SCHEPPACH CIRCULAR LOG SAW YOU CAN HANDLE LARGE QUANTITIES OF LOGS IN A FAST, SAFE AND ENERGY EFFICIENT MANNER.

- High performance 700 mm HW Sawblade for fast and efficient cutting of all types of wood
- Rugged welded steel construction for long service life
- Extremely sturdy, powerful and comfortable
- Huge cutting capacity
- Fast and ergonomic handling with the protective cover
- Pre-assembled
- Enclosed and safe sawing area



With SAFETY GUARD according to latest regulation



LOGISTICAL DATA

Weight net / gross	90 / 155 kg
Packaging dimensions	1115 x 745 x 1100 mm
Order No	5905112902
Barcode	4046664069492
20 Container	28 pcs
40 Container	60 pcs
40 HQ Container	64 pcs



SPECIFICATIONS

Dimensions L x W x H	1090 / 1300 x 700 x 1060 mm
Saw blade Ø	700 mm
Cutting Ø max.	240 mm
Cutting length min. / max.	250 – 1500 mm
Cutting speed	1400 rpm
Motor	400 V
Input	4500 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

PROFESSIONAL

HS520 | 505 MM LOG SAW

WITH THE NEW SCHEPPACH HS520 SAWING FIREWOOD HAS NEVER BEEN EASIER. WHETHER YOU ARE CUTTING LOGS FOR HOME USE, OPEN FIRES IN CATERING ESTABLISHMENTS OR HOTELS: THIS NEW SAW IS THE END PRODUCT OF YEARS OF KNOW-HOW AND SCHEPPACH INNOVATION.

- High performance 505 mm HW Sawblade for fast and efficient cutting of all types of wood
- Rugged welded steel construction for long service life
- Huge cutting capacity
- Fast and ergonomic handling with the patented protective cover
- Enclosed and safe sawing area
- Extremely sturdy, powerful and comfortable
- Cuts multiple logs at one stroke
- Pre-assembled

MADE IN GERMANY

PZ.LSV GS geprüfte Sicherheit

max. 3000 W







SPECIFICATIONS

Dimensions L x W x H	860 x 775 x 990 mm	
Saw blade Ø	505 mm	
Cutting Ø max.	170 mm	
Cutting length min. / max.	200 – 1200 mm	
Cutting speed	2800 rpm	
Motor	230 V~	400 V
Input	2600 W	3000 W

LOGISTICAL DATA

Weight net / gross	75 / 80.5 kg	
Packaging dimensions	940 x 765 x 620 mm	
Order No	5905108901 (230 V~)	5905108902 (400 V)
Barcode	4014915194057	4014915194088
1 Truck	99 pcs	

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

PROFESSIONAL

max. 4500 W

MADE IN GERMANY

PZ.LSV GS geprüfte Sicherheit



With patented PROTECTIVE COVER according to latest regulation

SPECIFICATIONS

Dimensions L x W x H	1270 x 730 x 1130 mm	
Saw blade Ø	700 mm	
Cutting Ø max.	250 mm	
Cutting length min. / max.	250 – 1500 mm	
Cutting speed	1400 rpm	
Motor	230 V~ / 50 Hz	380 – 420 V / 50 Hz
Input	3000 W	4500 W

LOGISTICAL DATA

Weight net / gross	95 / 117 kg	89.5 / 111 kg
Packaging dimensions	1200 x 800 x 1274 mm	
Order No	5905109901 (230 V~)	5905109902 (380 – 420 V)
Barcode	4014915194163	4014915194064
1 Truck	34 pcs	

HS720 | 700 MM LOG SAW

THIS HEAVY DUTY LOG CUTTING SAW WILL APPEAL TO COUNTRY HOME USERS WHERE THERE IS AN ABUNDANT SUPPLY OF LOGS AS WELL AS COMMERCIAL OPERATORS, ESPECIALLY TREE SURGEONS, LANDSCAPERS AND FORESTRY CONCERNS.

- High performance 700 mm HW Sawblade for fast and efficient cutting of all types of wood
- Rugged welded steel construction for long service life
- Huge cutting capacity
- Fast and ergonomic handling with the patented protective cover
- Enclosed and safe sawing area
- Extremely sturdy, powerful and comfortable
- Fully assembled
- Cuts multiple logs at one stroke

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

PROFESSIONAL

max. 7500 W

PZ.LSV GS geprüfte Sicherheit

MADE IN GERMANY



SPECIFICATIONS

Dimensions L x W x H	1270 x 730 x 1130 mm	
Saw blade Ø	700 mm	
Cutting Ø max.	250 mm	
Cutting length min. / max.	250 – 1500 mm	
Cutting speed	1400 rpm	
Motor	400 V / 50 Hz	
Input	5200 W	7500 W

LOGISTICAL DATA

Weight net / gross	117 / 139 kg	121.5 / 143.,5 kg
Packaging dimensions	1200 x 800 x 1270 mm	
Order No	1905114902 (5200 W)	1905114903 (7500 W)
Barcode	4014915194071	4014915194095
1 Truck	34 pcs	

wox d700 | 700 MM LOG SAW

WITH ITS POWERFUL 7.5 KW MOTOR, THIS LOG SAW EASILY COPES WITH EVERYTHING THAT IS REQUIRED OF IT. WHETHER CUTTING 250 MM DIA LOGS OR UP TO 38 CM BILLET WOOD, THE wox d700 MAKES EASY WORK OF EVERY JOB.

- High performance 700 mm HW sawblade for fast and efficient cutting of all types of wood
- Rugged welded steel construction for long service life
- Huge cutting capacity
- Fast and ergonomic handling with the patented protective cover
- Extremely sturdy, powerful and comfortable
- Stable, torsion free steel frame and swivel
- All-steel construction ensures long lifetime
- Fully assembled
- Cuts multiple logs at one stroke

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

PROFESSIONAL

HS720B
700 MM PETROL LOG SAW

PZ.LSV GS geprüfte Sicherheit

MADE IN GERMANY

9000 W

WHETHER YOU ARE A HOME USER IN NEED OF AN ABUNDANT SUPPLY OF LOGS OR A COMMERCIAL OPERATOR IN LANDSCAPING OR FORESTRY, THIS HEAVY DUTY LOG CUTTING SAW WILL SERVE YOU WELL. DRIVEN BY A POWERFUL 4-STROKE PETROL ENGINE IT WILL PROCESS TRUNKS AND BRANCHES FAST AND EASILY WHILE BEING INDEPENDENT OF AN ELECTRIC POWER SOURCE.

- High performance 700 mm HW sawblade for fast and efficient cutting of all types of wood
- Rugged welded steel construction for long service life
- Powerful petrol motor for great cutting performance
- Energy-saving work thanks to optimised rocker fulcrum
- A power supply is no longer needed, since the log saw can be used everywhere
- Enclosed and safe sawing area
- Fast and ergonomic handling with the patented protective cover
- Fully assembled
- Cuts multiple logs at one stroke









SPECIFICATIONS

Dimensions L x W x H	1270 x 730 x 1130 mm
Saw blade Ø	700 mm
Cutting Ø max.	240 mm
Cutting length min. / max.	250 – 1500 mm
Cutting speed	1400 rpm
Motor	9000 W (12.2 HP)

LOGISTICAL DATA

Weight net / gross	121 / 142 kg
Packaging dimensions	1200 x 800 x 1274 mm
Order No	5905109903
Barcode	4014915194392
1 Truck	34 pcs

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

PROFESSIONAL

MADE IN GERMANY

7500 W

PZ.LSV GS geprüfte Sicherheit



With patented PROTECTIVE COVER according to latest regulation

CUTTING HEIGHT UP TO



wox d700sl | 700 MM LOG SAW

THE FUTURE BEGINS TODAY WITH THE NEW LOG SAWS. THANKS TO THE INNOVATIVE ENCLOSED SAWING AREA WORKING SAFETY HAS SIGNIFICANTLY INCREASED.

- High performance 700 mm TCT Sawblade for fast and efficient cutting of all types of wood
- Energy-saving work thanks to optimised rocker fulcrum
- Security line for comfortable, efficient and safe work
- Huge cutting capacity
- Fast and ergonomic handling by the patented protective cap
- Extremely sturdy, powerful and comfortable
- Enclosed and safe sawing area
- Safe work by means of a mobile handle to clamp timber in the rocker
- Rugged welded steel construction for long service life
- Fully assembled
- Protective cap according to the latest regulations
- Cut multiple logs in one step

SPECIFICATIONS

Dimensions L x W x H	1270 x 730 x 1130 mm	
Saw blade Ø	700 mm	
Cutting Ø max.	250 mm	
Cutting length min. / max.	250 – 1500 mm	
Cutting speed	1400 rpm	
Motor	380 – 420 V / 50 Hz	
Input	5200 W	7500 W

LOGISTICAL DATA

Weight net / gross	123.5 / 149 kg	128 / 153.5 kg
Packaging dimensions	1200 x 800 x 1270 mm	
Order No	1905102902	1905102905
Barcode	4014915094210	4014915195436
1 Truck	34 pcs	

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

PROFESSIONAL


MADE IN GERMANY

PZ.LSV GS geprüfte Sicherheit

max. 7500 W





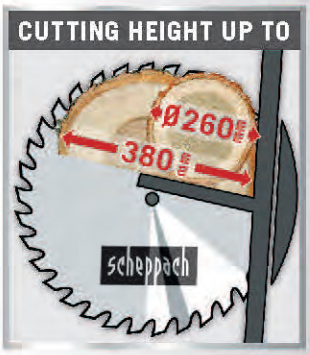

SPECIFICATIONS

	kw 7.0 (Motor)		kwz 7.0 (PTO)	kw-ze 7.0 (Motor & PTO)
Dimensions L x W x H	820 x 1060 x 1150 mm		960 x 1410 x 1150 mm	900 x 1500 x 1150 mm
Saw blade Ø	700 mm		700 mm	700 mm
Cutting Ø max.	260 mm		270 mm	260 mm
Cutting length min. / max.	250 – 1500 mm		250 – 1500 mm	250 – 1500 mm
Cutting speed	1400 rpm		–	1400 rpm
PTO speed	–		540 rpm	540 rpm
Motor	380 – 420 V / 50 Hz		PTO	380 – 420 V / 50 Hz + PTO
Input	5200 W	7500 W	–	5200 W
Drive mode	–		Telescopic joint	Telescopic joint
Tractor power min.	–		20 PS	20 PS

LOGISTICAL DATA

	kw 7.0 (Motor)		kwz 7.0 (PTO)	kw-ze 7.0 (Motor & PTO)
Weight net / gross	152 / 166 kg	156 / 171 kg	171 / 186 kg	217 / 229 kg
Packaging dimensions	1130 x 970 x 1350 mm		1500 x 1130 x 1350 mm	1500 x 1130 x 1350 mm
Order No	1905115902	1905115903	1905115904	1905115905
Barcode	4014915194101	4014915194118	4014915194125	4014915194132

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

kw-ze 7.0

PTO
POWER TAKE-OFF



With patented PROTECTIVE COVER according to latest regulation

kw 7.0 / kwz 7.0 / kw-ze 7.0
700 MM LOG SAW

WITH THE ROCKER CIRCULAR CUT SAWS, YOU CAN QUICKLY, SAFELY AND EFFICIENTLY CUT LARGE QUANTITIES OF ROUNDWOOD. THE BELT ENGINE WITH BELT DRIVE ALLOWS YOU THE MAXIMUM CUTTING DEPTH. IF YOU ARE INDEPENDENT, THEN THE KWZ 7.0 AND THE KW-ZE 7.0 ARE EXACTLY THE RIGHT COMPANIONS FOR YOU. THANKS TO THE PULLEY DRIVE AND THREE POINT MOUNTING, YOU ARE INDEPENDENT AND MOBILE.

- High performance 700 mm HW Sawblade for fast and efficient cutting of all types of wood
- Huge cutting capacity
- Fast and ergonomic handling with the patented protective cover
- Extremely sturdy, powerful and comfortable
- Vee-belt drive
- Stable, torsion free steel frame and swivel
- Power saving working due to ideal swivel centre
- Rugged welded steel construction for long service life
- Enclosed and safe sawing area
- Fully assembled
- Cuts multiple logs at one stroke



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

PROFESSIONAL

5200 W

PZ.LSV GS geprüfte Sicherheit

MADE IN GERMANY



With SAFETY GUARD according to latest regulation

BELT DRIVE SYSTEM

DEPTH OF CUT



CUTTING HEIGHT UP TO



ke 70m | ROLLING TABLE CIRCULAR SAW

THE ROLLING TABLE CIRCULAR SAWS ARE DESIGNED FOR RIPPING AS WELL AS CROSS CUTTING.

- High performance 700 mm TCT Sawblade for fast and efficient cutting of all types of wood
- Powerful 5200 Watt motor
- V-belt drive
- Enclosed and safe sawing area
- Table top made of metal, size 1400 x 860 mm
- Max cutting depths – 250 mm
- Fast and ergonomic handling with the protective cover
- Enclosed and safe sawing area
- Extremely sturdy, powerful and comfortable
- Safety folding and hold device
- Solid, welded angular steel frame
- Fully assembled
- Cuts multiple logs at one stroke

SPECIFICATIONS	
Dimensions L x W x H	860 x 1460 x 1210 mm
Saw blade Ø	700 mm
Table size	1400 x 860 mm
Cutting depth	250 mm
Motor	380 – 420 V / 50 Hz
Input	5200 W

LOGISTICAL DATA	
Weight net / gross	172 / 185 kg
Packaging dimensions	1130 x 1500 x 1400 mm
Order No	1905117902
Barcode	4014915194156

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

PROFESSIONAL

5200 W

MADE IN GERMANY

PZ.LSV GS geprüfte Sicherheit

With SAFETY GUARD according to latest regulation





ke d700 | ROLLING TABLE CIRCULAR SAW

THIS ROLLING TABLE CIRCULAR SAW BENCH TACKLES YOUR WORK LOAD QUICKLY AND TO YOUR SATISFACTION. THE FUNCTION OF THE SLIDING TABLE MADE OF SHEET STEEL, RUNNING ON BALL BEARINGS, IS EXTRAORDINARILY SMOOTH.

- High performance 700 mm TCT Sawblade for fast and efficient cutting of all types of wood
- Powerful 5200 Watt motor
- Blade Spec: CV blade
- Table top made of metal, size 1400 x 860 mm
- Max cutting depths – 230 mm
- Extremely sturdy, powerful and comfortable
- Safe work by means of a mobile handle to clamp timber
- Solid, welded angular steel frame
- Fast and ergonomic handling with the protective cover
- Enclosed and safe sawing area
- The solid, torsion-resistant steel construction protected by extremely robust powder-coating will be stable even after many years of service
- Fully assembled
- Cuts multiple logs at one stroke

SPECIFICATIONS

Dimensions L x W x H	1420 x 855 x 1250 mm
Saw blade Ø	700 mm
Table size	1400 x 860 mm
Cutting depth	230 mm
Motor	380 – 420 V / 50 Hz
Input	5200 W

LOGISTICAL DATA

Weight net / gross	149 / 165 kg
Packaging dimensions	1500 x 1130 x 1400 mm
Order No	1905116902
Barcode	4014915194149
1 Truck	12 pcs

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 112

HS520

	Description	Order Numbers	Barcode
1 **TCT sawblade**	Ø 505 x 30 mm / 40 T	3905111701	4046664029601
2 **Circular sawblade CV**	Ø 500 x 30 mm, AT* / 56 T	10023205	4014915010234
3 **Circular sawblade TCT**	Ø 500 x 30 mm, AT* / 44 T	15270704	4014915038696
4 **Circular sawblade TCT**	Ø 500 x 30 mm, AT* / 36 T	56000702	4014915038771

HS720 / HS720B / wox d700 / wox d700sl / wox z700sl

	Description	Order Numbers	Barcode
1 **TCT sawblade**	Ø 700 x 30 mm / 56 T	10023207	4014915020981
2 **Circular sawblade TCT**	Ø 700 x 30 mm, WZ* / 42 T	13108001	4014915031963
3 **Circular sawblade TCT**	Ø 700 x 30 mm, WZ* / 84 T	13110701	4014915036838
4 **Dust extractor unit**	Connection Ø 100 mm	1905109700	4014915201847
5 **Dust extractor unit** for kwz 7.0, kw-ze 7.0 and wox d700sl	Connection Ø 100 mm	15300707	4014915071815
6 **Swivel extension**	With cutting length up to 330 mm	15300706	4014915070146

kw 7.0 / kwz 7.0 / kw-ze 7.0

	Description	Order Numbers	Barcode
1 **TCT sawblade**	Ø 700 x 30 mm / 56 T	10023207	4014915020981
2 **Circular sawblade TCT**	Ø 700 x 30 mm, LF* / 42 T	13108001	4014915031963
3 **Circular sawblade TCT**	Ø 700 x 30 mm, AT* / 84 T	13110701	4014915036838
4 **Three point linkage**	For 400 V variant	15360702	4014915081302
5 **Swivel extension**	With cutting length up to 330 mm	15300706	4014915070146
6 **Folding device** for kwz 7.0 and kw-ze 7.0	Easy transport	10011300	4014915041474
7 **Telescopic joint w** for kwz 7.0 and kw-ze 7.0	575 – 875 mm	05018101	4014915020875
8 **Dust extractor unit** for kwz 7.0 and kw-ze 7.0	Connection Ø 100 mm	15300707	4014915071815

HS730 / ke 70m / ke d700

	Description	Order Numbers	Barcode
1 **TCT sawblade**	Ø 700 x 30 mm / 56 T	10023207	4014915020981
2 **Circular sawblade TCT**	Ø 700 x 30 mm, LF* / 42 T	13108001	4014915031963
3 **Circular sawblade TCT**	Ø 700 x 30 mm, AT* / 84 T	13110701	4014915036838

	Description	Order Numbers	Barcode
1 **Protective cover** for HS520, HS720, HS720B, wox d700, wox d700sl, wox z700sl, kw 7.0, kwz 7.0, kw-ze 7.0	1500 x 1000 x 1300 mm	7905301702	4014915087984

*AT = alternating teeth  | LF = flat teeth 



13 mm

CAST IRON BODY





DP13 | DRILL PRESS

THE SCHEPPACH "DP13" BENCH DRILL PRESS IS THE PERFECT TOOL FOR THE SMALL DOMESTIC AND LIGHT DUTY WORKSHOP. COMPLYING WITH ALL THE LATEST H&S LEGISLATION THIS DRILL MUST BE THE ECONOMIC CHOICE FOR A PREMIER BRAND AT LOW COST WITHOUT COMPROMISING THE SPECIFICATION. METAL, PLASTICS, IDEAL FOR HARD & SOFT WOODS.


- Quick-lock chuck comes as standard
- 5 speeds from 600 to 2600 rpm to suit wood, metal & plastic
- Chuck capacity 13 mm
- Sturdy cast iron construction
- Excellent, value for money bench mounted workshop tool
- Powerful 350 W motor

SPECIFICATIONS

Dimensions L x W x H	430 x 200 x 580 mm
Table size	165 x 165 mm
Table tilt	45° – 0° – 45°
Speed range	600 – 2600 rpm (5 speeds)
Chuck cap / type	13 mm / keyless
Max. chuck to table	138 mm
Max. chuck to base	215 mm
Motor	230 V~
Input	350 W

OPTIONAL ACCESSORY

BENCH VICE

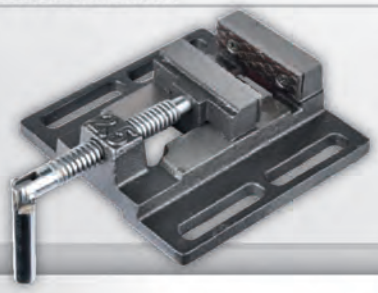

Order No: 7906800701
Barcode: 4046664037606

LOGISTICAL DATA

Weight net / gross	14.5 / 15.5 kg
Packaging dimensions	460 x 415 x 230 mm
Order No	5906805901
Barcode	4046664037392
20 Container	630 pcs
40 Container	1260 pcs
40 HQ Container	1400 pcs



DP16VL | DRILL PRESS

SCHEPPACH'S DRILL PRESS WITH LASER CENTERING DEVICE IS A POWERHOUSE FOR YOUR WORKSHOP. PACKED WITH FEATURES THAT YOU'LL FIND IN LARGER, MORE INDUSTRIAL TYPE DRILL PRESSES, YOU CAN POWER THROUGH METAL, WOOD AND OTHER MATERIALS WITH EASE.

- 5 speed selections for various drilling applications
- Chuck capacity max. 16 mm
- Sturdy steel construction
- Excellent value for money bench mounted workshop tool
- Powerful 500 W motor for long-lasting performance
- Exact laser alignment system for precision works


16 mm





MULTI APP



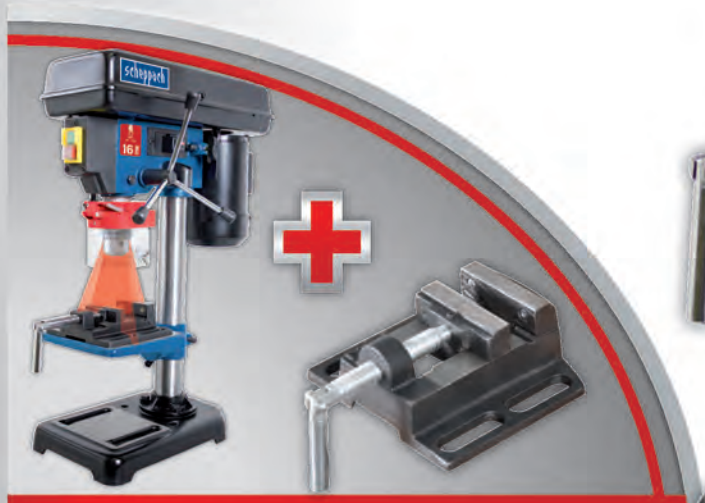

INCLUDED VICE

360°

SPECIFICATIONS

Dimensions L x W x H	445 x 225 x 590 mm
Table size	164 x 162 mm
Table tilt	45° – 0 – 45°
Speed range	550 / 950 / 1450 / 1950 / 2500 rpm
Chuck cap	1.5 – 16 mm
Max. chuck to table	175 mm
Max. chuck to base	260 mm
Motor	230 V~
Input	500 W

LOGISTICAL DATA

Weight net / gross	15.5 / 17 kg
Packaging dimensions	480 x 460 x 240 mm
Order No	5906808901
Barcode	4046664045335
20 Container	540 pcs
40 Container	1080 pcs
40 HQ Container	1342 pcs



16 mm

360°

DP16VLS | DRILL PRESS

SCHEPPACH'S DRILL PRESS WITH LASER CENTERING DEVICE IS A POWERHOUSE FOR YOUR WORKSHOP. PACKED WITH FEATURES THAT YOU'LL FIND IN LARGER, MORE INDUSTRIAL TYPE DRILL PRESSES, YOU CAN POWER THROUGH METAL, WOOD AND OTHER MATERIALS WITH EASE.

- 5 speed selections for various drilling applications
- Chuck capacity max. 16 mm
- Sturdy steel construction
- Powerful 500 W motor for long-lasting performance
- Exact laser alignment system for precision works



INCLUDED VICE

SPECIFICATIONS

Dimensions L x W x H	460 x 255 x 630 mm
Table size	160 x 168 mm
Table tilt	45° – 0 – 45°
Speed range	600 – 2600 rpm
Chuck cap	3 – 16 mm
Max. chuck to table	170 mm
Max. chuck to base	250 mm
Motor	230 V~
Input	500 W

LOGISTICAL DATA

Weight net / gross	13.5 / 14 kg
Packaging dimensions	456 x 376 x 246 mm
Order No	5906810901
Barcode	4046664068808
20 Container	680 pcs
40 Container	1350 pcs
40 HQ Container	1440 pcs



16 mm

CAST IRON BODY

360°



INCLUDED VICE







DP16SL | DRILL PRESS

THE SCHEPPACH DRILL PRESS – DP16SL WITH LASER CENTERING DEVICE, ALLOWS YOU TO DRILL TRUE AND PRECISE HOLES MORE CONVENIENTLY AND ACCURATELY. ACHIEVE PROFESSIONAL RESULTS WITH THIS ECONOMICAL BENCH DRILL PRESS.

- 5 speed selections for various drilling applications
- Chuck capacity 16 mm
- Sturdy cast iron construction
- Excellent value for money bench mounted workshop tool
- Powerful 550 W motor for long-lasting performance
- Exact laser alignment system for precision works

SPECIFICATIONS

Dimensions L x W x H	732 x 235 x 482 mm
Table size	194 x 165 mm
Table tilt	45° – 0° – 45°
Speed range	510 – 2430 rpm (5 speeds)
Chuck cap	16 mm
Max. chuck to table	305 mm
Max. chuck to base	405 mm
Motor	230 V~
Input	550 W

LOGISTICAL DATA

Weight net / gross	23.5 / 25 kg
Packaging dimensions	605 x 375 x 285 mm
Order No	4906807901
Barcode	4046664036432
20 Container	378 pcs
40 Container	763 pcs
40 HQ Container	872 pcs



9 SPEED SELECTION

16 mm

DP16PRO | DRILL PRESS

THE SCHEPPACH DP16PRO DRILL PRESS WILL ALWAYS BE THE RIGHT CHOICE WITH ITS 500 W MOTOR AND 9 SPEEDS. REGARDLESS OF WHETHER YOU DRILL WOOD, METAL OR PLASTIC, WITH THE DP16PRO YOU CAN ALWAYS CHOOSE THE RIGHT SPEED SETTING FOR IT AND THE INTEGRATED LASER WILL LET YOU WORK WITH PRECISION.

- 9 speed selction
- Chuck capacity max. 16 mm
- Light and durable plastic steel combination
- Powerful 500 W motor for long-lasting performance
- Exact laser alignment system for precision works

360°





SPECIFICATIONS

Dimensions L x W x H	420 x 238 x 600 mm
Table size	160 x 160 mm
Table tilt	45° – 0 – 45°
Speed range	9 speeds
Chuck cap	1.5 – 16 mm
Max. chuck to table	218 mm
Max. chuck to base	301 mm
Motor	230 V~
Input	500 W

LOGISTICAL DATA

Weight net / gross	13.5 / 15 kg
Packaging dimensions	456 x 405 x 246 mm
Order No	5906811901
Barcode	4046664069782
20 Container	640 pcs
40 Container	1290 pcs
40 HQ Container	1440 pcs




VARIABLE SPEED

CAST IRON BODY

16 mm

360°



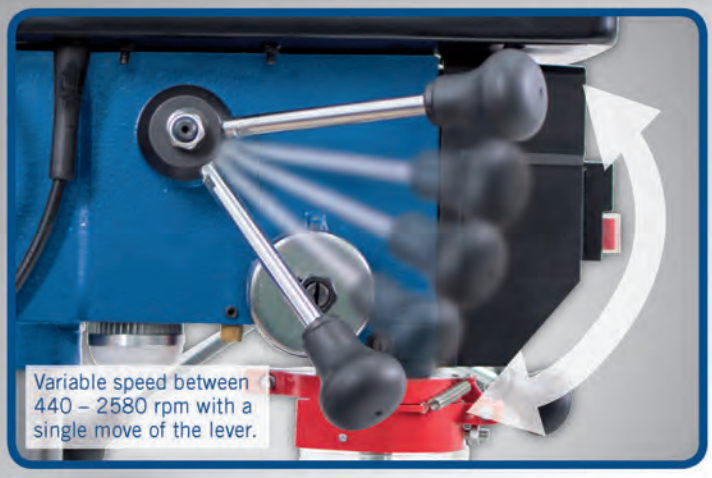

DP18VARIO | DRILL PRESS PROFESS.

THE SCHEPPACH "DP18VARIO" VARIABLE SPEED DRILL PRESS IS IDEAL FOR THOSE WHO NEED INDUSTRIAL-LEVEL PERFORMANCE IN THEIR DRILLING WORK. THIS BENCH-TOP, CAST IRON DRILL PRESS HAS THE POWER TO DRILL THROUGH METAL, PLASTICS, HARD & SOFT WOODS. VARIABLE SPEED SETTINGS WITH A SINGLE MOVE OF THE LEVER, PERMIT OPTIMUM ADJUSTMENT TO THE REQUIREMENTS IMPOSED BY THE MATERIAL AND THE BIT USED.

- Quick-lock chuck comes as standard
- Variable speed from 440 to 2580 rpm to suit wood, metal & plastic
- Chuck capacity 1 – 16 mm
- Sturdy cast iron construction
- Excellent, value for money bench mounted workshop tool
- Powerful 550 W motor
- Including table roller extension, cross laser and working light





INCLUDED




INCLUDED



OPTIONAL ACCESSORY

BENCH VICE

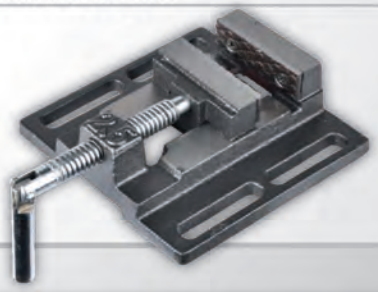

Order No: 7906800701
Barcode: 4046664037606

SPECIFICATIONS

Dimensions L x W x H	540 x 390 x 950 mm
Table size	240 x 240 mm
Table tilt	45° – 0 – 45°
Speed range	440 – 2580 rpm (variable speed)
Chuck cap / type	1 – 16 mm / quick-lock chuck
Max. chuck to table	325 mm
Max. chuck to base	495 mm
Motor	230 – 240 V~
Input	550 W

LOGISTICAL DATA

Weight net / gross	38.5 / 41 kg
Packaging dimensions	750 x 500 x 290 mm
Order No	5906807901
Barcode	4046664045328
20 Container	230 pcs
40 Container	483 pcs
40 HQ Container	550 pcs




PROFESSIONAL

MT140 | 355 MM CUT OFF SAW

THIS COMPACT AND HEAVY-DUTY ABRASIVE CUT OFF SAW IS IDEAL FOR BOTH SITE AND WORKSHOP USE

- Ideal for clean and accurate cuts in ferrous metals
- Complete disc guard ensures that the operator is given the highest degree of safety and protection possible
- Spindle lock for easy disc changes
- Lightweight and portable
- Including vise





Spindle lock for easy disc changes

OPTIONAL ACCESSORY

CUTTING DISC
Ø 355 x 25.4 mm

Order No: 5903702701
Barcode: 4046664038085

SPECIFICATIONS

Dimensions L x W x H	580 x 310 x 400 mm
Disc Ø	355 x 25.4 mm
Cutting capacity at 90°	50 x 230 mm / Ø 100 mm
Swivel range	30° – 0° – 45°
No load speed	3000 rpm
Motor	220 – 240 V~
Input	2000 W

LOGISTICAL DATA

Weight net / gross	16.9 / 18.6 kg
Packaging dimensions	600 x 340 x 430 mm
Order No	5903702901
Barcode	4046664037569
20 Container	330 pcs
40 Container	670 pcs
40 HQ Container	730 pcs





OPTIONAL ACCESSORIES

SAW BLADE
1140 x 12.7 x 0.65 mm
10 / 14 T

Order number: 7901506701
Barcode: 4046664070993

MBS1100 | METAL CUTTING BAND SAW

CUTTING PIPES AND METAL PROFILES HAS NEVER BEEN SO EASY. THE SCHEPPACH MBS1100 IS A PROFESSIONAL METAL BAND SAW WITH EXCELLENT VALUE FOR MONEY. THE SAW CAN BE USED ON THE INCLUDED STAND OR FREEHAND. THUS, CUTTING IN-SITU PIPEWORK IS . IDEAL FOR USE ON STEEL, IRON, ALLOY, COPER, STAINLESS STEEL, PVC OR TEFLON.

- Powerful 1100 Watt
- Removable from the working table for in-situ operation
- Max. material thickness up to 127 x 127 mm
- Incl. 2nd saw band, work table and LED for optimal lighting of the working area
- Saw band length 45"
- Adjustable handle
- Electronically adjustable working speed
- Light and handy. Ideal for universal use on the job site or garage, for DIY applications or farming

SPECIFICATIONS	
Dimensions L x W x H	635 x 205 x 549 mm
Swivel range	0° – 45°
Saw blade length	1140 mm
Cutting speed	0.7 – 2.4 m/s
Clearance height / width: 90° / 90°	127 / 127 mm
Clearance height / width: 45° / 45°	40 / 127 mm
Motor	220 – 240 V~ / 50 Hz
Input	1100 W

LOGISTICAL DATA	
Weight net / gross	13.6 / 15 kg
Packaging dimensions	380 x 360 x 563 mm
Order No	5901507901
Barcode	4046664068433
20 Container	355 pcs
40 Container	745 pcs
40 HQ Container	875 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 52

CB01











SPECIFICATIONS

	CB01	CB02
Dimensions L x W x H	3100 x 140 x 130 mm	3100 x 140 x 130 mm
Lift capacity	1000 kg	2000 kg
Lifting range	3000 mm	3000 mm

LOGISTICAL DATA

	CB01	CB02
Weight net / gross	9.5 / 10 kg	13.5 / 14 kg
Packaging dimensions	250 x 180 x 170 mm	270 x 180 x 170 mm
Order No	4907401000	4907402000
Barcode	4046664015307	4046664015314
20 Container	2500 pcs	1900 pcs
40 Container	2800 pcs	2150 pcs
40 HQ Container	2800 pcs	2150 pcs

CB02











CB01 / CB02 | CHAIN HOIST

THE **CB01** OR **CB02** CHAIN HOIST IS PERFECT FOR THE GARAGE OR WORKSHOP AND DESIGNED TO MEET THE SPECIFICATIONS OF THE PRO AND SERIOUS DO-IT-YOURSELFER. HEAVY DUTY CONSTRUCTION FOR YEARS OF RELIABILITY.

- **1000 kg maximum lift capacity (CB01)**
- **2000 kg maximum lift capacity (CB02)**
- 3000 mm lifting range
- Ideal for lifting, pulling, stretching, positioning and securing
- Controlled lifting and lowering facility
- Freewheel chain to remove slack by hand
- Perfect for use in confined spaces
- Hook with safety latch



HRS250 / HRS400 / HRS600 / HRS800 / HRS1000 | ELECTRIC HOIST

THESE ELECTRIC POWER HOISTS ARE IDEAL FOR ALL MANNER OF LIFTING WORK IN GARAGES OR WORKSHOPS. LIFT HEAVY LOADS EASY AND SAFE.

- **Max load capacity – 125 kg single cable and 250 kg double cable (HRS250)**
- **Max load capacity – 200 kg single cable and 400 kg double cable (HRS400)**
- **Max load capacity – 300 kg single cable and 600 kg double cable (HRS600)**
- **Max load capacity – 400 kg single cable and 800 kg double cable (HRS800)**
- **Max load capacity – 500 kg resp. 999 kg with deflection pulley (HRS1000)**
- Lifting height – 12 metres single cable and 6 metres double cable
- Easy to install
- Supplied with special fixing clamps

SPECIFICATIONS

	HRS250	HRS400	HRS600	HRS800	HRS1000
Dimensions L x W x H	400 x 185 x 130 mm	452 x 215 x 155 mm	392.5 x 146 x 174 mm	417.5 x 153.5 x 174 mm	482 x 170 x 250 mm
Load capacity without return roller	125 kg	200 kg	300 kg	400 kg	500 kg
Load capacity including return roller	250 kg	400 kg	600 kg	800 kg	999 kg
Lifting height without return roller	12 m	12 m	12 m	12 m	12 m
Lifting height including return roller	6 m	6 m	6 m	6 m	6 m
Motor	230 V~	230 V~	230 V~	230 V~	230 V~
Input	530 W	780 W	1050 W	1350 W	1600 W

LOGISTICAL DATA

	HRS250	HRS400	HRS600	HRS800	HRS1000
Weight net / gross	11.5 / 12.5 kg	17 / 18 kg	17.5 / 18.5 kg	19.5 / 20.5 kg	31.5 / 33.5 kg
Packaging dimensions	418 x 233 x 138 mm	475 x 258 x 160 mm	405 x 150 x 240 mm	520 x 440 x 170 mm	565 x 245 x 325 mm
Order No	4906904000	4906905000	5906903901	5906904901	5906905901
Barcode	4046664015284	4046664015291	4046664068464	4046664068471	4046664068488
20 Container	1560 pcs	1114 pcs	1100 pcs	1000 pcs	644 pcs
40 Container	over weight	over weight	over weight	over weight	over weight
40 HQ Container	over weight	over weight	over weight	over weight	over weight

PROFESSIONAL


650 mm CROSS CUT X

360°



INCLUDED 2 TABLE WIDTH EXTENSION







FS3600 | WET TILE SAW

THIS 8" COMMERCIAL TILE SAW IS BUILT TO HANDLE THE LARGEST TILES ON COMMERCIAL JOB SITES. RADIAL TILE CUTTER AND STAND WITH LARGE TABLE FOR PRECISE CUTTING OF CERAMIC, QUARRY, TERRACOTTA, SLATE, MARBLE, PORCELAIN AND FROST-PROOF TILES.

- It can cut through 920 mm large format tile and 650 mm tile on a diagonal
- The moving cutting head gives added safety and control, while the tilting cutting head gives accurate mitres
- Performs straight cuts
- 2 guide rails ensure accurate cutting efforts
- Two integrated work tables expand as needed to give full support on the largest tiles
- Folding/removable stand with wheels for easy transportation over any terrain or stairs and mobility to and from the jobsite
- Adjustable laser alignment system to easily align blade with cut line for accurate cuts
- Beveling head for cuts at the most common angles

SPECIFICATIONS

Dimensions L x W x H	1560 x 440 x 1140 mm
Table size	1290 x 400 mm
Cutting disc Ø	200 mm
Water	30 L
Cutting height 90°	36 mm
Cutting height 45°	29 mm
Motor	230 V~
Input	900 W

OPTIONAL ACCESSORY

DIAMOND CUTTING DISC
Ø 200 x 25.4 mm



Order No: 7906700705
Barcode: 4046664039686

DIAMOND CUTTING DISC
professional,
Ø 200 x 25.4 mm



Order No: 7906700703
Barcode: 4046664037439


LOGISTICAL DATA

Weight net / gross	50 / 59 kg
Packaging dimensions	1530 x 540 x 585 mm
Order No	5906706901
Barcode	4046664034315
20 Container	42 pcs
40 Container	90 pcs
40 HQ Container	120 pcs



PROFESSIONAL

750 mm CROSS CUT X



360°

INCLUDED 2 TABLE WIDTH EXTENSION

OPTIONAL ACCESSORY

DIAMOND CUTTING DISC
Ø 230 x 2.4 mm
Order number: 7906700704
Barcode: 4046664039648

DIAMOND CUTTING DISC
Professional 180 x 22.2 mm
Order number: 3906705701
Barcode: 4046664034865

DIAMOND CUTTING DISC
180 x 22.2 mm
Order number: 3906705050
Barcode: 4046664014065





SPECIFICATIONS

Dimensions L x W x H	1845 x 440 x 1155 mm
Table size	1377 x 400 mm
Cutting disc Ø	230 mm
Water	40 L
Cutting height 90°	40 mm
Cutting height 45°	34 mm
Motor	230 V~
Input	1200 W

LOGISTICAL DATA

Weight net / gross	58 / 66 kg
Packaging dimensions	1830 x 540 x 585 mm
Order No	5906707901
Barcode	4046664034322
20 Container	36 pcs
40 Container	75 pcs
40 HQ Container	100 pcs




FS4700 | WET TILE SAW

THE SCHEPPACH FS4700 IS IDEAL FOR CUTTING TODAY'S POPULAR LARGE FORMAT TILES. IT IS IDEAL FOR CUTTING CERAMIC, PORCELAIN, MARBLE, TRAVATINE ETC., WALL AND FLOOR TILES AND CAN BE USED FOR ANGLE AND MITRE CUTS.

- It can cut through 1200 mm large format tile and 848 mm tile on a diagonal
- The moving cutting head gives added safety and control, while the tilting cutting head gives accurate mitres.
- Performs straight cuts
- 2 guide rails ensure accurate cutting efforts
- Two integrated work tables expand as needed to give full support on the largest tiles
- Folding/removable stand with wheels for easy transportation over any terrain or stairs and mobility to and from the jobsite
- Adjustable laser alignment system to easily align blade with cut line for accurate cuts
- Beveling head for cuts at the most common angles
- 2 table width extension

PROFESSIONAL

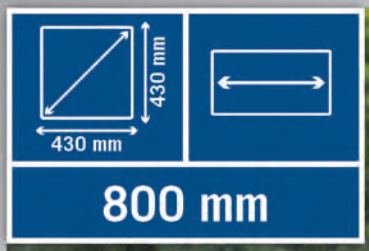

Scheppach HSM3500

Oberklasse **1,6** MOTOR & MASCHINE 4/2018

Preis/Leistung: gut – sehr gut

HSM3500 | WET TILE & BRICK SAW

A PORTABLE WET TILE AND STONE SAW FOR CUTTING BRICKS, BLOCKS, LARGE TILES & SLABS. DURABLE ENOUGH TO WITHSTAND THE RIGOURS OF DAILY SITE USE & WITH A SIDE MOUNTED CUTTING ARM & BLADE FOR 'STRAIGHT-THROUGH' CUTTING CAPACITY IN LONG MATERIALS.

- Accurate cutting of all materials up to 110 mm deep
- It can cut through 800 mm large format tile and 530 mm tile on a diagonal
- Cuts up to 800 mm with guided sliding table
- Beveling head accurately position the head to make 0° and 45° bevel cuts
- Adjustable head plunge
- Large rubberized table work surface
- Plunging head allows controlled cuts
- Submersible pump - high volume pump provides water to the cutting wheel
- Two sawblades included with continuous and segmented cutting rim
- Folding/removable stand with wheels for easy transportation over any terrain or stairs and mobility to and from the jobsite
- Adjustable laser alignment system to easily align blade with cut line for accurate cuts

OPTIONAL ACCESSORIES

DIAMOND CUTTING DISC
Ø 350 x 25.4 mm

Order No: 7906700701
Barcode: 4014915090571

DIAMOND CUTTING DISC-SEGMENTED
Ø 350 x 25.4 MM

Order No: 7906700702
Barcode: 4014915090588

SPECIFICATIONS

Dimensions L x W x H	1200 x 600 x 1260 mm
Table size	530 x 430 mm
Cutting disc Ø	350 mm
Cutting height 90°	110 mm
Cutting height 45°	72 mm
Motor	230 V~
Input	2000 W

LOGISTICAL DATA

Weight net / gross	72 / 90 kg
Packaging dimensions	1230 x 560 x 530mm
Order No	5906708901
Barcode	4046664030454
20 Container	51 pcs
40 HQ Container	148 pcs



HEAVY DUTY

HSC120 | BLOCK SPLITTER

SCHEPPACH´S BLOCK SPLITTER HSC120 IS A PROFESSIONAL SOLUTION FOR PAVING CONTRACTORS, ESPECIALLY THOSE INVOLVED IN THE INSTALLATION OF BLOCK PAVINGS. THE BLOCK SPLITTER IS LEIGHTWEIGHT AND IS EQUIPPED WITH WHEELS FOR EASY TRANSPORTATION. ITS LONG BLADE IS CAPABLE OF CUTTING SMALL OR MEDIUM-SIZED PAVING STONES UP TO A HEIGHT OF 140 MM AND A WIDTH OF 320 MM.

- Leightweight and extremely stable and with precise cutting ability
- Capable of cutting composite blocks and most paving blocks on the market
- Heavy duty construction
- Accurate cuts every time
- Long life blades. The blades can be turned quickly and easily
- Spring loaded suspending table ensures an exact cut

max. 320 mm

max. 140 mm



360°

LOGISTICAL DATA	
Weight net / gross	34 / 37 kg
Packaging dimensions	590 x 340 x 650 mm
Order No	5908503900
Barcode	4046664067979
20 Container	192 pcs
40 Container	405 pcs
40 HQ Container	448 pcs



SPECIFICATIONS	
Dimensions L x W x H	1140 x 306 x 1170 mm
Table height	120 mm
Cutting length max.	320 mm
Cutting height max.	140 mm
Cutting height min.	25 mm
Quantity of knives	2

HEAVY DUTY

360°

max. 330 mm

max. 140 mm



INCLUDED LONG LIFE BLADES





SPECIFICATIONS

Dimensions L x W x H	790 x 260 x 562 mm
Table height	120 mm
Cutting length max.	330 mm
Cutting height max.	140 mm
Cutting height min.	25 mm
Quantity of knives	2

LOGISTICAL DATA

Weight net / gross	41 / 42.5 kg
Packaging dimensions	830 x 295 x 595 mm
Order No	5908501900
Barcode	4046664024026
20 Container	187 pcs
40 Container	377 pcs
40 HQ Container	486 pcs



HSC130 | BLOCK SPLITTER

BLOCK SPLITTERS, ALSO KNOWN AS BLOCK CUTTERS OR GUILLOTINES ARE AN ESSENTIAL PIECE OF KIT FOR MOST PROFESSIONAL PAVING CONTRACTORS, ESPECIALLY THOSE HEAVILY INVOLVED WITH THE INSTALLATION OF BLOCK PAVING. THEY ENABLE BLOCKS AND OTHER SMALL PAVING ELEMENTS TO BE SPLIT OR CUT IN A STRAIGHT LINE USING ONLY MANUAL PRESSURE APPLIED VIA A TELESCOPIC LEVER.

- Light weight but extremely stable and with precise cutting ability
- Capable of cutting composite blocks and most paving blocks on the market
- Heavy duty construction
- Accurate cuts every time
- Long life blades. The blades can be turned quickly and easily
- Spring loaded suspending table ensures an exact cut

HEAVY DUTY



HSC140 | BLOCK SPLITTER

SCHEPPACH´S BLOCK SPLITTER HSC140 IS A PROFESSIONAL SOLUTION FOR PAVING CONTRACTORS, ESPECIALLY THOSE INVOLVED IN THE INSTALLATION OF BLOCK PAVINGS. THE BLOCK SPLITTER IS LEIGHTWEIGHT AND IS EQUIPPED WITH WHEELS FOR EASY TRANSPORTATION. ITS LONG BLADE IS CAPABLE OF CUTTING SMALL OR MEDIUM-SIZED PAVING STONES UP TO A HEIGHT OF 140 MM AND A WIDTH OF 420 MM.

- Leightweight and extremely stable and with precise cutting ability
- Capable of cutting composite blocks and most paving blocks on the market
- Heavy duty construction
- Accurate cuts every time
- Long life blades. The blades can be turned quickly and easily
- Spring loaded suspending table ensures an exact cut

360°

LOGISTICAL DATA	
Weight net / gross	39 / 42 kg
Packaging dimensions	680 x 335 x 650 mm
Order No	5908504900
Barcode	4046664067986
20 Container	174 pcs
40 Container	360 pcs
40 HQ Container	404 pcs

SPECIFICATIONS	
Dimensions L x W x H	1185 x 306 x 1170 mm
Table height	120 mm
Cutting length max.	420 mm
Cutting height max.	140 mm
Cutting height min.	25 mm
Quantity of knives	2

DH1300PLUS
ROTARY AND DEMOLITION HAMMER

THE NEW SCHEPPACH DH1300PLUS IS THE PERFECT DUAL ROTARY AND DEMOLITION HAMMER FOR THE PROFESSIONAL USER. WITH AN IMPACT FORCE OF 5 JOULES IT HAS THE HIGHEST MATERIAL REMOVAL RATE IN ITS CLASS. EQUIPPED AS STANDARD WITH AN SDS-PLUS QUICK CHANGE CHUCK, CHANGEOVER FROM DRILLING TO DEMOLITION IS CARRIED OUT WITH MINIMUM INCONVENIENCE AND TIME LOSS. TRUST SCHEPPACH!

- The SDS-Plus chuck ensures a high power transmission
- Anti-Vibration control ensures convenient working
- 5 Joules to power through tough demolition jobs
- Powerful 1250 W motor
- Four functions for maximum efficiency and performance: drilling – hammer drilling – chiselling – rotary chiselling. With or without chisel lock
- Incredible hammer impact frequency between 0 and 4500 bpm
- BMC box provides convenient transport and storage
- Depth stop, drill-set, flat and point chisel set included
- Adjustable additional handle for fatigue-free and comfortable working

SYSTEM VIBRATION Control

4 FUNCTIONS









SPECIFICATIONS

Dimensions L x W x H	362 x 243 x 114 mm
Impact force	5 Joules
Impact rating	0 – 4500 bpm
Speed	0 – 850 rpm
Working capacity max. Ø	30 mm
Motor	220 – 240 V~
Input	1250 W

LOGISTICAL DATA

Weight net / gross	6 / 7.5 kg
Packaging dimensions	410 x 120 x 330 mm
Order No	5907902901
Barcode	4046664044529
20 Container	1300 pcs
40 Container	2600 pcs
40 HQ Container	2600 pcs



360°

LED INDICATOR

SDS plus

5 kg

5 Joule



OPTIONAL ACCESSORIES

SDS-PLUS DRILL SET
Ø 8 I 10 I 12 mm
L 150 mm



Order No: 7907900004
Barcode: 4046664044987

SDS-PLUS FLAT + POINT CHISEL SET
Ø 13.5 mm
L 250 mm



Order No: 7907900003
Barcode: 4046664044970



INCLUDED BMC BOX, DRILL-SET, FLAT- & POINT CHISEL SET

DH1200MAX
ROTARY AND DEMOLITION HAMMER

THE DH1200MAX ROTARY HAMMER WITH SDS-MAX IS THE CHISELLING SPECIALIST WITH VIBRATION CONTROL. WITH AN IMPACT FORCE OF 9 JOULES, IT HAS THE HIGHEST MATERIAL REMOVAL RATE IN ITS CLASS.

- 9 Joules to power through tough demolition jobs
- This rotary hammer drill has a 1400 W motor
- Three-function rotary for better versatility and performance
- Variable speed making it powerful and versatile
- Incredible hammer impact frequency between 0 and 4100 bpm
- Anti-Vibration control ensures convenient working
- BMC box provides convenient transport and storage
- Flat- and point chisels included

SDS max

6 kg

9 Joule

LED INDICATOR

360°







INCLUDED BMC BOX, FLAT- AND POINT CHISELS INCLUDED

OPTIONAL ACCESSORIES

DRILL SET
Ø 16 I 18 I 20 mm
L 320 mm



Order No: 7907900002
Barcode: 4046664036357

FLAT- & POINT CHISEL SET
Ø 18 mm
L 350 mm



Order No: 7907900001
Barcode: 4046664036340

LOGISTICAL DATA

Weight net / gross	6 / 10.5 kg
Packaging dimensions	410 x 126 x 370 mm
Order No	5907901901
Barcode	4046664036265
20 Container	1160 pcs
40 Container	2320 pcs
40 HQ Container	2320 pcs



SPECIFICATIONS

Dimensions L x W x H	409 x 107 x 275 mm
Impact force	9 Joules
Impact rating	0 – 3780 bpm
Speed	0 – 480 rpm
Working capacity (concrete)	max. 38 mm
Motor	230 V~
Input	1050 W

AB1600 | DEMOLITION HAMMER

HEAVY DUTY, DEMOLITION HAMMER PROVIDES MARKET LEADING PERFORMANCE AND DURABILITY FOR CONSISTENT RESULTS IN MASONRY AND CONCRETE.

- Supplied with 2 chisels and solid case
- 50 Joules of impact energy
- Quick and easy chisel changes
- Soft-grip D-handle for a comfortable grasp
- Compact, streamlined design allows access in confined areas



OPTIONAL ACCESSORIES

FLAT CHISEL
Ø 30 mm, L 390 mm

Order No: 3908201108
Barcode: 4046664014287

POINT CHISEL
Ø 30 mm, L 390 mm

Order No: 3908201109
Barcode: 4046664014294

SPECIFICATIONS

Dimensions L x W x H	652 x 157 x 276 mm
Impact force	50 Joules
Motor	230 V~
Input	1600 W

LOGISTICAL DATA

Weight net / gross	16 / 20 kg
Packaging dimensions	700 x 165 x 280 mm
Order No	5908201901
Barcode	4046664020264
20 Container	710 pcs
40 Container	1200 pcs
40 HQ Container	1200 pcs



60 Joule

1900 W

HEXAGON

AB1900 | PROFESSIONAL DEMOLITION BREAKER

SCHEPPACH´S AB1900 IS THE POWERFUL DEMOLITION HAMMER YOU NEED FOR YOUR HEAVY-DUTY WORKS. THANKS TO THE HIGH IMPACT FORCE OF 60 JOULES YOU CAN FACE ANY CHALLENGE. THIS DEMOLITION HAMMER IS EQUIPPED WITH A HEXAGONAL TOOL HOLDER FOR QUICK TOOL CHANGE AND FEATURES A SOFT-GRIP HANDLE FOR COMFORTABLE HOLDING.

- Powerful 1900 Watt
- 60 Joules of impact energy
- Fatigue-proof working with switch lock for continous operation
- Soft-grip handle for comfortable holding
- Compact, streamlined design allows access in confined areas
- Included flat- & point chisel set & BMC box with wheels

360°

INCLUDED FLAT- & POINT CHISEL SET & BMC BOX




OPTIONAL ACCESSORIES

FLAT CHISEL
Ø 30 mm, L 390 mm



Order No: 3908201108
Barcode: 4046664014287

POINT CHISEL
Ø 30 mm, L 390 mm



Order No: 3908201109
Barcode: 4046664014294

SPECIFICATIONS

Dimensions L x W x H	674 x 155.3 x 264.3 mm
Impact force	60 Joules
Motor	230 – 240 V~
Input	1900 W

LOGISTICAL DATA

Weight net / gross	16.5 / 20.8 kg
Packaging dimensions	910 x 205 x 370 mm
Order No	5908206901
Barcode	4046664068594
20 Container	474 pcs
40 Container	991 pcs
40 HQ Container	1110 pcs



PRE-ASSEMBLED

360°



SPECIFICATIONS

	MIX125	MIX140
Dimensions L x W x H	770 x 700 x 450 mm	1210 x 840 x 1280 mm
Drum capacity	125 L	140 L
Drum speed max.	26.6 rpm	26.6 rpm
Motor	230 V~	230 V~
Input	550 W	550 W

LOGISTICAL DATA

	MIX125	MIX140
Weight net / gross	48 / 52 kg	49 / 53.5 kg
Packaging dimensions	770 x 700 x 450 mm	780 x 700 x 465 mm
Order No	5908403901	5908404901
Barcode	4046664022954	4046664036463
20 Container	120 pcs	120 pcs
40 Container	253 pcs	253 pcs
40 HQ Container	304 pcs	255 pcs

MIX125 / MIX140 | CONCRETE MIXERS

THESE RUGGED CONCRETE MIXERS PROVIDE CONTRACTOR PERFORMANCE AT AN ECONOMICAL PRICE. DESIGNED FOR ON-SITE DURABILITY THESE PORTABLE MIXERS ARE IDEAL FOR ALL SMALL TO MEDIUM BUILDING PROJECTS. DESIGNED FOR DURABLE SERVICE WITH MINIMUM MAINTENANCE REQUIREMENTS.

- Welded bottom drum provides better strength
- 125 L or 140 L large capacity drum
- Wheels for mobility
- Large drum wheel for easy emptying
- Labyrinth housing to prevent water splashing and dual fans for better cooling
- Durable and robust – ideal for professional use
- Cast iron gears (fully enclosed)
- Adjustable spring tensions
- Easy to maintain

PRE-ASSEMBLED

360°



SPECIFICATIONS

	MIX160	MIX180
Dimensions L x W x H	1340 x 810 x 1290 mm	1260 x 850 x 1400 mm
Drum capacity	160 L	180 L
Drum speed max.	29.5 rpm	29.5 rpm
Motor	230 V~	230 V~
Input	650 W	800 W

LOGISTICAL DATA

	MIX160	MIX180
Weight net / gross	56 / 60 kg	57 / 61.5 kg
Packaging dimensions	760 x 740 x 515 mm	760 x 740 x 520 mm
Order No	5908405901	5908406901
Barcode	4046664036470	4046664036487
20 Container	84 pcs	
40 Container	192 pcs	
40 HQ Container	238 pcs	

MIX160 / MIX180 | CONCRETE MIXERS

SCHEPPACH MIX160 OR MIX180 CONCRETE MIXERS ARE DESIGNED FOR BUILDING SITE DURABILITY OFFERING THAT BIGGER OUTPUT OF PERFECTLY MIXED CONCRETE. THEY HAVE ALL THE DESIGN FEATURES NECESSARY FOR THE GENERAL BUILDER.

- Welded bottom drum provides better strength.
- 160 L or 180 L large capacity drum
- Wheels for mobility
- Large drum wheel for easy emptying
- Labyrinth housing to prevent water splashing and dual fans for better cooling
- Durable and robust – ideal for professional use
- Cast iron gears (fully enclosed)
- Adjustable spring tensions
- Easy to maintain

8200 N

2.8 HP

360°

ExpertenTesten.de
Rüttelplatten
SEHR GUT (1,8)
01/2016

HP800S | PLATE COMPACTOR

WHEN YOU REQUIRE GOOD COMPACTING FROM A ROBUST, LIGHTWEIGHT PLATE, THE SCHEPPACH HP800S IS THE PERFECT CHOICE. THE HP800S PLATE COMPACTOR IS A PORTABLE AND EFFECTIVE COMPACTING PLATE FOR WORK ON PATIOS, EXTENSIONS, LANDSCAPING AND OTHER RESIDENTIALLY BASED JOBS.

- Plate size: 490 x 320 mm
- Compaction force: 8200 N
- Faster travel speed – for improved productivity
- Includes foldaway wheels for easy one-man transportation
- Includes black rubber pad for block paving work
- Powered forward movement – light enough to allow user to manually reverse





OPTIONAL ACCESSORIES

RUBBER PAD
black

Order number: 3904604076
Barcode: 4014915217985

SPECIFICATIONS

Dimensions L x W x H	1200 x 400 x 500 mm
Plate size	490 x 320 mm
Compaction force	8200 N
Travel speed	25 m/min
Compaction depth	20 cm
Capacity	87cm³
Engine	2.8 HP, petrol

LOGISTICAL DATA

Weight net / gross	48 / 50 kg
Packaging dimensions	650 x 370 x 430 mm
Order No	5904602903
Barcode	4046664024262
20 Container	216 pcs
40 Container	432 pcs
40 HQ Container	432 pcs











HP1100S | PLATE COMPACTOR

TTHE "HP1100S" PLATE COMPACTOR PROVIDES A LIGHT, PORTABLE AND EFFECTIVE COMPACTION PLATE FOR WORK ON PATIO, GARDEN, LANDSCAPING AND OTHER RESIDENTIALLY BASED JOBS.

- Plate size: 530 x 350 mm
- Compaction force: 11000 N
- Faster travel speed – for improved productivity
- Includes foldaway wheels for easy one-man transportation
- Includes black rubber pad for block paving work
- Powered forward movement – light enough to allow user to manually reverse

SPECIFICATIONS

Dimensions L x W x H	1140 x 400 x 840 mm
Plate size	530 x 350 mm
Compaction force	11000 N
Travel speed	25 m/min
Compaction depth	25 cm
Capacity	163 cm^3
Engine	5.5 HP, petrol

LOGISTICAL DATA

Weight net / gross	57 / 60 kg
Packaging dimensions	700 x 410 x 495 mm
Order No	5904603903
Barcode	4046664024279
20 Container	176 pcs
40 Container	352 pcs
40 HQ Container	352 pcs



PROFESSIONAL

13000 N

6.5 HP

ExpertenTesten.de
Rüttelplatten
SEHR GUT (1,4)
01/2016

360°







INCLUDED RUBBER PAD

SPECIFICATIONS

Dimensions L x W x H	1200 x 420 x 815 mm
Plate size	540 x 420 mm
Compaction force	13000 N
Travel speed	15 m/min
Compaction depth	30 cm
Capacity	196 cm^3
Engine	6.5 HP, petrol

LOGISTICAL DATA

Weight net / gross	83 / 87 kg
Packaging dimensions	700 x 435 x 490 mm
Order No	5904604903
Barcode	4046664024286
20 Container	156 pcs
40 Container	312 pcs
40 HQ Container	312 pcs



HP1300S | PLATE COMPACTOR

PPROFESSIONAL HEAVY DUTY HP1300S COMPACTOR PLATE WITH LOW HAND-ARM VIBRATION AND HIGH PERFORMANCE COMPACTION. THIS MODEL PROVIDES RELIABLE, COMFORTABLE USE FOR A VARIETY OF APPLICATIONS

- Plate size: 540 x 420 mm
- Compaction force: 13000 N
- Powerful 6.5 HP engine for reliable operation
- Faster travel speed – for improved productivity
- Includes foldaway wheels for easy one-man transportation
- Includes black rubber pad for block paving work
- Powered forward movement – light enough to allow user to manually reverse

PROFESSIONAL

360°

6.5 HP

15000 N



OPTIONAL ACCESSORIES

RUBBER PAD
black

Order number: 7904601701
Barcode: 4046664071327

INCLUDED
RUBBER PAD & WHEELS

HP2000S | PLATE COMPACTOR

COMPACT PATHS, DRIVEWAYS AND LARGE AREAS QUICKLY AND EASILY WITH THE SCHEPPACH HP2000S PLATE COMPACTOR. ITS 6.5 HP LONCIN ENGINE ACHIEVES 15000 N COMPACTION FORCE AND A COMPACTION DEPTH OF 30 CM WITHOUT ANY EFFORT. THANKS TO THE AUTOMATIC GEAR, THE PLATE COMPACTOR HAS A TRAVEL SPEED OF 15 M/MIN AND THEREBY DOES THE WORK ALMOST BY ITSELF.

- High-strength steel base plate with curved edges
- Self-cleaning plate for best results
- Plate size 550 x 440 mm
- Compaction force 15000 N
- Powerful 6.5 HP Loncin Engine
- Fast travel speed of 25 m/min for improved productivity
- Includes transport frame for easy one-man transportation
- Includes rubber pad for block paving work

SPECIFICATIONS

Dimensions L x W x H	1025 x 440 x 930 mm
Plate size	550 x 440 mm
Compaction force	15000 N
Travel speed	25 m/min
Compaction depth	30 cm
Capacity	196 cm^3
Engine	6.5 HP, petrol

LOGISTICAL DATA

Weight net / gross	102 / 108 kg
Packaging dimensions	640 x 480 x 760 mm
Order No	5904608903
Barcode	4046664069393
20 Container	126 pcs
40 Container	252 pcs
40 HQ Container	252 pcs



PROFESSIONAL



360°

9 HP

30500 N

OPTIONAL ACCESSORIES

RUBBER PAD
black



Order number: 5904605012
Barcode: 4014915092667



INCLUDED
RUBBER PAD & WHEELS

SPECIFICATIONS

Dimensions L x W x H	1400 x 600 x 850 mm
Plate size	730 x 450 mm
Compaction force	30500 N
Travel speed	25 m/min
Compaction depth	50 cm
Capacity	270 cm^3
Engine	9.0 HP, petrol

LOGISTICAL DATA

Weight net / gross	158 / 171 kg
Packaging dimensions	775 x 480 x 1120 mm
Order No	5904605903
Barcode	4046664026891
20 Container	54 pcs
40 Container	138 pcs
40 HQ Container	N.A.



HP3000S
REVERSIBLE PLATE COMPACTOR

COMPACT SAND, GRAVEL AND COHESIVE SOILS WITH THIS HEAVY COMPACTOR. REVERSIBLE PLATE COMPACTORS ARE MOUNTED BENEATH THE ENGINE. THEIR DESIGN INCORPORATES TWO SETS OF ECCENTRIC WEIGHTS, COMPARED TO THE SINGLE USED ON FORWARD PLATES PREVENTING THEM FROM BEING MOUNTED AHEAD OF THE ENGINE. THEIR VIBRATOR HOUSING IS BOLTED TO THE BOTTOM PLATE.

- High-strength steel base plate with curved edges for superior performance
- Self-cleaning plate for operator convenience
- Highly maneuverable
- Plate size: 730 x 450 mm
- Compaction force: 30500 N
- Powerful 9.0 HP engine for reliable operation
- Faster travel speed – for improved productivity
- Includes transport frame for easy one-man transportation
- Includes black rubber pad for block paving work

PROFESSIONAL

6.5 HP

10000 N







360°

VS1000 | TAMPER

SCHEPPACH VS1000 TAMPER HAS BEEN SPECIALLY DEVELOPED FOR REPAIRS AND IMPROVEMENTS TO EARTHWORKS, DITCHES AND TRENCHES, BACKFILL, FOUNDATIONS AND ASPHALT PATCHING

- Robust and easy to use
- Excellent running characteristics and handling
- Perfectly balanced weight distribution
- Excellent compaction performance
- Optimum working speed
- Wide range of applications
- High reliability and durability
- Easy, safe transport

SPECIFICATIONS

Dimensions L x W x H	740 x 420 x 1150 mm
Working width (tamper plate)	345 x 285 mm
Impact force	10000 N
Compacting depth	40 – 60 mm
Vibration batch	450 – 650 vpm
Input	6.5 HP, petrol

LOGISTICAL DATA

Weight net / gross	78 / 88 kg
Packaging dimensions	570 x 510 x 1100 mm
Order No	3908301915
Barcode	4046664012993
20 Container	88 pcs
40 Container	184 pcs
40 HQ Container	184 pcs



MAX. DRILL DEPTH 800 MM

EB1700 | EARTH AUGER

SCHEPPACH´S EB1700 EARTH AUGER IS SUITABLE FOR MANY APPLICATIONS, SUCH AS DRILLING HOLES FOR FENCE POSTS, PLANT SEEDLINGS AND MANY MORE.

- Easy operation and maintenance
- Powerful 2-stroke petrol engine
- 51.7 cc / 1.77 HP
- 100, 150 and 200 mm drills included

51.7 cc

FOR DRILLING

- FENCE POSTS
- PLANT SEEDLINGS
- TREES



INCLUDED 100, 150 AND 200 MM DRILLS

360°





SPECIFICATIONS

Dimensions L x W x H	540 x 310 x 1120 mm
Drilling speed	310 rpm
Displacement	51.7 cc
RPM max.	9600 rpm
Engine	1.77 HP, 2-Stroke


LOGISTICAL DATA

Weight net / gross	9.5 / 22.5 kg
Packaging dimensions	830 x 570 x 320 mm
Drill Ø	100, 150, 200 mm
Order No	5904702903
Barcode	4046664044925
20 Container	113 pcs
40 Container	230 pcs
40 HQ Container	269 pcs



OPTIONAL ACCESSORIES

Drill Ø 100 mm, length 800 mm



Order No.: 7904702701
Barcode: 4046664045526

Drill Ø 150 mm, length 800 mm



Order No.: 7904702702
Barcode: 4046664045533

Drill Ø 200 mm, length 800 mm



Order No.: 7904702703
Barcode: 4046664045533



DP3000 | DUMPER

SCHEPPACH DP3000 MOTORISED PETROL DUMPER SUPPORTS YOU WITH ALL KIND OF LOADS, ON ANY TERRAIN, FOR VARIOUS APPLICATIONS IN CONSTRUCTION AS WELL AS IN LANDSCAPING, FORESTRY AND AGRICULTURAL WORK.
IDEAL FOR HAULING EARTH, GRAVEL, STONE, RUBBLE, BRICKS AND ANYTHING ELSE YOU WISH TO TRANSPORT.

- Capable of transporting up to 300 kg of solid or bulk material
- Air-filled tyres and four wheel drive for maximum traction
- Quick response, easy maneuverable
- The large tipping container is perfect for hauling earth, gravel, stone, rubble, bricks and anything else you wish to transport
- The lever located on the handlebar controls the direction of travel
- Transmission – 3 forward gears and 1 reverse gear
- Tipping container – 912 x 650 x 560 mm
- Large, air-filled wheels for easy operation

OPTIONAL ACCESSORY

SNOW PLOW
100 x 50 cm



Order No: 7908800001
Barcode: 4046664042563



SPECIFICATIONS - ENGINE

Model	Single-cylinder; 4 stroke petrol engine
Input max.	6.5 HP
Displacement	196 cc

LOGISTICAL DATA

Weight net / gross	148 / 168 kg
Packaging dimensions	1150 x 735 x 850 mm
Order No	5908802903
Barcode	4046664037989
20 Container	30 pcs
40 Container	64 pcs
40 HQ Container	96 pcs



SPECIFICATIONS

Dimensions L x W x H	1330 x 810 x 1038 mm
Dimension container	912 x 650 x 560 mm
Loading capacity max.	300 kg
Tipping	hand
Transmission	gear
Forward speed max.	2.5 / 4.8 / 6.4 km/h
Reverse speed max.	2 km/h

DP5000 | DUMPER

SCHEPPACH DP5000 TRACKED MOTORISED PETROL DUMPER: PROFESSIONAL SUPPORTER OF INDUSTRIES SUCH AS CONSTRUCTION, FORESTRY, AGRICULTURE AND FARMING ETC. IDEAL FOR HAULING EARTH, GRAVEL, STONE, RUBBLE, BRICKS AND ANYTHING ELSE YOU WISH TO TRANSPORT.

- Capable of transporting up to 500 kg of solid or bulk material
- The large tipping container is perfect for hauling earth, gravel, stone, rubble, bricks and anything else you wish to transport
- The lever located on the handlebar controls the direction of travel
- Transmission – 3 forward gears and 1 reverse gear
- Tipping container – 950 x 680 x 465 mm
- Drive tracks for easy operation

INCLUSIVE

DRIVE TRACKS FOR MAXIMUM PERFORMANCE

max. 500 kg

3 X FORWARD & 1 X REVERSE SPEED







SPECIFICATIONS - ENGINE

Model	Single-cylinder; 4 stroke petrol engine
Input max.	6.5 HP
Displacement	196 cc

LOGISTICAL DATA

Weight net / gross	255 / 290 kg
Packaging dimensions	1675 x 775 x 1115 mm
Order No	5908801903
Barcode	4046664026464
20 Container	20 pcs
40 Container	40 pcs
40 HQ Container	42 pcs



SPECIFICATIONS

Dimensions L x W x H	1600 x 715 x 1030 mm
Dimension container	950 x 680 x 465 mm
Loading capacity max.	500 kg
Tipping	hydraulic
Transmission	gear
Forward speed max.	1.57 – 2.93 – 3.66 km/h
Reverse speed max.	1.14 km/h

VARIABLE SPEED

1200 W

120 mm



- Mortar mixer
- Paint mixer

OPTIONAL ACCESSORY

MIXING PADDLE REPLACEMENT



Order No: 3907801009
Barcode: 4046664042372

PM1200 | PADDLE MIXER

WHATEVER YOU NEED TO MIX, THE SCHEPPACH PM1200 PADDLE MIXER IS THE EASY AND EFFICIENT SOLUTION. PAINT – PLASTER – DRY MATERIALS – EVEN THOSE SMALL CONCRETING JOBS. THEY ARE ALL ACCOMPLISHED WITH MINIMUM MANUAL EFFORT AND AT SUCH LOW COST.

- Ideal for mixing mortar, roughcast, paint, etc.
- Variable speed 0 – 700 rpm
- Powerful 1200 Watt motor
- Quick and easy paddle changes
- Soft-grip ergonomic D-handle for a comfortable and firm grasp
- Sturdy M14 thread
- Included paint and mortar mixer





SPECIFICATIONS

Dimensions	315 x 200 x 875 mm
Motor	220 – 240 V~ / 50 Hz
Power	1200 W
No load speed	0 – 700 rpm
Shaft length	550 mm
Tool connection thread	M14

LOGISTICAL DATA

Weight net / gross	4.8 / 6.6 kg
Packaging dimensions	340 x 280 x 290 mm
Order No	5907801901
Barcode	4046664042198
20 Container	1050 pcs
40 Container	2150 pcs
40 HQ Container	2550 pcs



VARIABLE SPEED



PM1600 | PADDLE MIXER

THE SCHEPPACH PM1600 PADDLE MIXER HAS A 1600 W MOTOR FOR DIFFERENT MIXING JOBS LIKE, PAINT – PLASTER – DRY MATERIALS ETC. THANKS TO THE VARIABLE-SPEED CONTROL, YOU CAN EASILY MATCH THE SPEED TO THE TASK AT HAND.

- Ideal for mixing mortar, roughcast, paint, etc.
- Variable speed 0 – 580 / 0 – 780 rpm
- Powerful 1600 Watt motor
- Quick and easy paddle changes
- Soft-grip ergonomic D-handle for a comfortable and firm grasp
- Sturdy M14 thread
- Includes mixing paddle

OPTIONAL ACCESSORY

MIXING PADDLE REPLACEMENT



Order No: 5907800701
Barcode: 4046664063681



SPECIFICATIONS

Dimensions	310 x 180 x 900 mm
Motor	230 V~ / 50 Hz
Power	1600 W
Variable speed, two gears	0 – 580 / 0 – 780 rpm
Shaft length	550 mm
Tool connection thread	M14

LOGISTICAL DATA

Weight net / gross	5.2 / 6.2 kg
Packaging dimensions	420 x 320 x 260 mm
Order No	5907803901
Barcode	4046664043737
20 Container	750 pcs
40 Container	1520 pcs
40 HQ Container	1700 pcs



VARIABLE SPEED

1800 W

110 mm

360°

QUICK EASY CHANGE

DUAL VARIO SPEED



INCLUDED 2 MIXING PADDLES



PM1800D | TWIN PADDLE MIXER

THE SCHEPPACH PM1800D OFFERS TWIN PADDLES AND A STRONG 1800 WATT MOTOR FOR HEAVY-DUTY MIXING JOBS. IT MIXES EVEN VISCOUS MATERIALS THOROUGHLY AND EFFORTLESSLY.

- Two contradirectional rotating paddles for optimum results
- Suitable for mixing plaster, grouts, adhesives, paint, etc.
- Two-speed gearbox with adjustable speed control
- Powerful 1800 Watt motor
- Soft-grip ergonomic D-handle for a comfortable and firm grasp
- Quick and easy paddle changes
- 2 mixing paddles included



OPTIONAL ACCESSORY

MIXING PADDLE REPLACEMENT SET



Order No 5907802701
Barcode: 4046664043300

SPECIFICATIONS

Dimensions L x W x H	315 x 220 x 895 mm
Motor	230 V~ / 50 Hz
Power	1800 W
Variable speed, two gears	0 – 450 / 0 – 790 rpm
Shaft length	570 mm
Tool connection thread	Quick release system

LOGISTICAL DATA

Weight net / gross	7.5 / 8.8 kg
Packaging dimensions	590 x 320 x 250 mm
Order No	5907802901
Barcode	4046664043072
20 Container	450 pcs
40 Container	924 pcs
40 HQ Container	1260 pcs



LEICHTGEWICHT

360°

2-STROKE ENGINE

max. 700 W



OPTIONAL ACCESSORIES

OIL ULTRA PERFORMANCE LONGLIFE SAE 5W-40
500 ml



Order No: 3906100701
Barcode: 4014915073512

SG1000 | GENERATOR

BECOME COMPLETELY INDEPENDENT FROM THE ELECTRICITY NETWORK! THANKS TO THE SCHEPPACH SG1000 63CC GENERATOR, YOU WILL NEVER RUN OUT OF ELECTRICITY, WHEREVER YOU ARE. EQUIPPED WITH A 230 V SOCKET FOR POWERING LOTS OF APPLIANCES, THIS TOOL HAS A MAX. POWER OUTPUT OF 750 W, MAKING IT IDEAL FOR CAMPING, HUNTING OR FISHING. IN ADDITION, THE LARGE TANK CAPACITY OF 4.2 LITERS GUARANTEES A LONG RUNNING-TIMES BEFORE NEEDING TO REFUEL.

- 63 cc, 2-stroke petrol engine
- 700 W max. power output – 680 W continuous output
- Light and portable
- Standard 230 V socket with overload circuit breaker
- Anti-vibration rubber feet, carry handle and recoil starter

SPECIFICATIONS ENGINE

Model	Single-cylinder; 2 stroke petrol engine
Capacity	63 cc
Tank capacity	4 L

SPECIFICATIONS - GENERATOR

Rated output / max. output	650 / 700 W
Socket	1 x 230 V~
AC frequency	50 Hz
Starter	Recoil starter

LOGISTICAL DATA

Weight net / gross	16.5 / 17.5 kg
Packaging dimensions	425 x 350 x 355 mm
Order No	5906218901
Barcode	4046664067931
20 Container	534 pcs
40 Container	1116 pcs
40 HQ Container	1280 pcs

AVR TECHNOLOGY

360°

max. 2700 W





OPTIONAL ACCESSORIES

OIL ULTRA PERFORMANCE LONGLIFE SAE 5W-40
500 ml



Order No: 3906100701
Barcode: 4014915073512

SG3100 | GENERATOR 2700 W

COMPACT AND AFFORDABLE PORTABLE POWER. WHEN YOU NEED TO TAKE YOUR POWER WITH YOU, THIS COMPACT GENERATOR IS THE PERFECT ANSWER. THE SCHEPPACH SG3100 MODEL OFFERS AN AFFORDABLE SOLUTION FOR RECREATION APPLICATIONS AND IS SIZED JUST RIGHT FOR CAMPING AND POWER TOOL USE.

- AVR-System
- Sturdy and robust steel frame protects vital components
- 6.5 HP petrol engine with easy start recoil system
- Impressively low noise output
- 2700 W maximum power output – 2500 W continuous output
- Air cooled 4 stroke engine
- 15 litre fuel tank

SPECIFICATIONS - ENGINE

Model	Single-cylinder; 4 stroke petrol engine
Max. engine power	6.5 HP
Displacement	196 cc
Starter	Recoil starter
Tank capacity	15 L
Fuel consumption 2/3 load	0.715 L/h

SPECIFICATIONS - GENERATOR

Dimensions L x W x H	586 x 424 x 448 mm
Voltage control	AVR-System
Rated output / max. output	2500 / 2700 W
Socket	2 x 230 V~
AC frequency	50 Hz
Overload protection	Yes
Low oil warning	Yes
Voltmeter	Yes

LOGISTICAL DATA

Weight net / gross	45 / 48 kg
Packaging dimensions	610 x 450 x 448 mm
Order No	5906213901
Barcode	4046664040453
20 Container	225 pcs
40 Container	475 pcs
40 HQ Container	475 pcs



AVR TECHNOLOGY







SG7000 | GENERATOR 5500 W

THIS PETROL POWERED GENERATOR OFFERS A RELIABLE SOURCE OF ELECTRICAL POWER FOR APPLICATIONS REMOTE FROM MAINS ELECTRICITY. THE ROBUST UNIT IS IDEAL FOR HOME, BUSINESS AND INDUSTRIAL USE INCLUDING POWERING LIGHTING, FREEZERS, POWER TOOLS AND WATER PUMPS.

- AVR-System
- Fitted with pneumatic tyred wheels and twin handles for on site portability
- Sturdy and robust steel frame protects vital components
- 13 HP petrol engine with easy electric start* and recoil backup system
- Impressively low noise output
- 5500 W maximum power output – 3600 W continuous output
- Air cooled 4 stroke engine
- 25 litre fuel tank

SPECIFICATIONS - ENGINE

Model	Single-cylinder 4 stroke petrol engine
Max. engine power	13 HP
Displacement	389 cc
Starter	Recoil starter, electric starter*
Tank capacity	25 L
Fuel consumption	3 L/h

*optional battery required

SPECIFICATIONS - GENERATOR

Dimensions L x W x H	945 x 655 x 600 mm
Voltage control	AVR-System
230 V max. output / rated	3000 / 3300 W
400 V max. output / rated	3600 / 5500 W
Socket	3 x 230 V~ / 1 x 400 V
AC frequency	50 Hz
Overload protection	Yes
Low oil warning	Yes
Voltmeter	Yes

LOGISTICAL DATA

Weight net / gross	84 / 88 kg
Packaging dimensions	690 x 560 x 570 mm
Order No	5906210901
Barcode	404666037613
20 Container	128 pcs
40 Container	272 pcs
40 HQ Container	272 pcs



PROFESSIONAL

max. 3000 W

POWERED by HONDA

360°



SG3500 | GENERATOR 3000 W

EVERYTHING YOU NEED IN A CLASSIC PORTABLE GENERATOR INCLUDING IT BEING POWERED BY HONDA. ADAPTED TO YOUR NEEDS THE NEW SCHEPPACH SG3500 IS THE IDEAL SOLUTION FOR ALL INDEPENDENT ELECTRICITY REQUIREMENTS. RELIABILITY IN ONE COMPACT GENERATOR.

- Gas-operated generator
- Ideal for your needs in weekend houses, on boats, for your garden, camp or construction site; wherever there is no power available
- Digital multimeter: voltage, frequency and total operating time
- Compact design
- Overload protection
- Oil deficiency safety device
- Tank holds 15 litre of petrol and includes a fuel gauge / indicator
- Noise level 67 dB at distance 7 m

LOGISTICAL DATA

Weight net / gross	48.6 / 52.1 kg
Packaging dimensions	630 x 460 x 525 mm
Order No	5906209901
Barcode	4046664036906
1 Truck	360 pcs



OPTIONAL ACCESSORIES

OIL ULTRA PERFORMANCE LONGLIFE SAE 5W-40
500 ml

Order No: 3906100701
Barcode: 4014915073512

SPECIFICATIONS ENGINE

Model	HONDA GP200; single-cylinder; 4 stroke petrol engine; air cooled
Max. engine power	6.5 HP
Displacement	196 cc
Starter	Recoil starter
Tank volume	15 L
Fuel consumption 3/4 load	1.3 L/h

SPECIFICATIONS GENERATOR

Dimensions L x W x H	600 x 445 x 485 mm
Voltage control	AVR-System
Rated output / max. output	2800 / 3000 W
Socket	2 x 230 V~
AC frequency	50 Hz
Overload protection	Yes
Oil deficiency safety device	Yes
Digital multimeter	Voltage, frequency & total operating hour

INVERTER GENERATOR

max. 2000 W

LOW NOISE GENERATOR

360°



OPTIONAL ACCESSORIES

OIL ULTRA PERFORMANCE LONGLIFE SAE 5W-40
500 ml

Order No: 3906100701
Barcode: 4014915073512

SPECIFICATIONS - ENGINE

Model	Single-cylinder; 4 stroke petrol engine
Max. engine power	2.86 HP
Displacement	105.6 cc
Starter	Recoil starter
Tank capacity	3.2 L
Fuel consumption	1.07 L/h





SPECIFICATIONS - GENERATOR

Dimensions L x W x H	510 x 295 x 440 mm
Rated output / max. output	1600 / 2000 W
Socket	2 x 230 V~ (AC), 1 x 12 V (DC)
AC frequency	50 Hz
Overload protection	Yes
Low oil warning	Yes

LOGISTICAL DATA

Weight net / gross	21 / 23 kg
Packaging dimensions	550 x 315 x 460 mm
Order No	5906208901
Barcode	4046664036494
20 Container	360 pcs
40 Container	745 pcs
40 HQ Container	745 pcs



SG2000 | INVERTER GENERATOR 2000 W

THE SCHEPPACH SG2000 GENERATOR CAN POWER COMMON MAJOR HOUSEHOLD APPLIANCES AND POWER TOOLS, AND PROVIDE EMERGENCY POWER DURING BLACKOUTS. THIS UNIT IS A PERFECT FIT FOR CAMPING AND GENERAL USE AROUND THE HOUSE.

- 2000 Watt peak and 1600 Watt running power to run sensitive electronics, power tools and more
- Equipped with two regular 230 V~ AC outlets and one 12 V DC outlet for battery charging
- 105.6 cc, 4 stroke engine runs on to provide dependable power
- Automatic shutoff when oil levels are low to prevent damage
- Compact size and weight make it easy to transport
- Sine wave gives clean, stable voltage and reliable power for sensitive electronics
- 71 dB sound rating ensures low operational noise for peace and quiet

INVERTER GENERATOR

max. 3400 W

LOW NOISE GENERATOR

ELECTRIC STARTER*



WHEELS (STANDARD)

OPTIONAL ACCESSORIES

OIL ULTRA PERFORMANCE LONGLIFE SAE 5W-40
500 ml



Order No: 3906100701
Barcode: 4014915073512

HANDLE (STANDARD)











SG3400i | INVERTER GENERATOR 3400 W

WITH THE SCHEPPACH SG3400I INVERTER GENERATOR, NO POWER FAILURE HAS TO BE FEARED. THANKS TO THE MODERN INVERTER TECHNOLOGY, WHICH PROVIDES „CLEAN" ELECTRICITY, EVEN SENSITIVE DEVICES LIKE LAPTOPS CAN BE USED WITHOUT A PROBLEM. THE GENERATOR CAN BE EASILY STARTED AND STOPPED USING THE REMOTE CONTROL. WITH ITS EXCELLENT INSULATION, THE GENERATOR IS EXTREMELY QUIET AND THE BUILT-IN ECO MODE, WHICH ADJUSTS THE ENGINE SPEED, MAKES THE GENERATOR EFFICIENT AND PRODUCES LESS EXHAUST. THE LARGE WHEELS AND UPHOLSTERED HANDLE MAKE IT EASY TO TRANSPORT.

- AVR-System
- Sturdy and robust steel frame protects vital components
- Max 5.1 HP petrol engine with easy start recoil system
- Impressively low noise output
- 3400 W maximum power output – 2800 W continuous output
- Air cooled 4 stroke engine
- 7.8 litre fuel tank
- Noise level 61 dB at distance 7 m



SPECIFICATIONS - ENGINE	
Model	Single-cylinder; 4 stroke petrol engine
Max. engine power	5.1 HP
Displacement	212 cc
Starter	Electric starter & Recoil starter
Tank capacity	7.4 L
Fuel consumption load	2.1 L/h

SPECIFICATIONS - GENERATOR	
Dimensions L x W x H	579 x 425 x 443 mm
Voltage control	Inverter
Rated output / max. output	3000 / 3400 W
Socket	2 x 230 V~
AC frequency	50 Hz
Overload protection	Yes
Low oil warning	Yes
Voltmeter	Yes

LOGISTICAL DATA	
Weight net / gross	43.8 kg / 47 kg
Packaging dimensions	580 x 508 x 450 mm
Order No	5906217901
Barcode	4046664072362
20 Container	160 pcs
40 Container	320 pcs
40 HQ Container	420 pcs



180 L/min

1.5 HP

8 bar

360°



INCLUDED INFLATING GUN, NOZZLES AND NEEDLES FOR INFLATINGS & HIGH QUALITY 3 M HOSE



MULTI APP





AIR FORCE 2 | MOBILE COMPRESSOR

SCHEPPACH´S "AIR FORCE 2" COMES WITH MANY INFLATING TOOLS FOR A WIDE RANGE OF APPLICATIONS. IT IS IDEAL FOR INFLATING CAR AND BIKE TYRES, BALLS, RAFTS, MATTRESSES, ETC. THIS LIGHTWEIGHT COMPRESSOR IS PERFECT FOR USE AT HOME, FOR YOUR CAR OR BOAT: A PERFECT TOOL FOR YOUR LEISURE ACTIVITIES.

- Lightweight and portable
- Large air capacity
- 8 bar maximum pressure
- Cord and hose storage
- Includes an inflating gun, nozzles and needles for inflating and a high quality 3 m hose

SPECIFICATIONS

Dimensions L x W x H	445 x 142 x 348 mm
Operating pressure max.	8 bar
Intake capacity	180 L/min
Cable length	5 m
Hose length	3 m
Speed max.	3750 rpm
Motor	220 – 240 V~
Input	1100 W

LOGISTICAL DATA

Weight net / gross	5.5 / 6 kg
Packaging dimensions	450 x 147 x 358 mm
Order No	5906126901
Barcode	4046664065159
20 Container	1008 pcs
40 Container	2100 pcs
40 HQ Container	2450 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

360°

180 L/min

1.5 HP

8 bar





MULTI APP



INCLUDED INFLATING GUN, NOZZLES AND NEEDLES FOR INFLATINGS & HIGH QUALITY 3 M HOSE





AIR FORCE 3 | MOBILE COMPRESSOR

THE SCHEPPACH AIR FORCE3 IS THE LATEST GENERATION OF THE SUCCESSFUL AIR FORCE AIR COMPRESSOR FAMILY. THE 1.5 HP MOTOR AND THE 180 L/MIN AIR INTAKE MAKE THE MOBILE AIR COMPRESSOR A STRONG ASSISTANT IN AND AROUND THE HOUSE, CAR, BOAT AND FOR RECREATIONAL USE. AND WITH THE COMPREHENSIVE ACCESSORY KIT OF THE AIR FORCE 3 NOTHING IS LEFT TO BE DESIRED.

- Compact and mobile
- Max air intake of 180 l/min
- Maintenance-free, oilless pump
- Max. working pressure 8 bar
- Integrated storage place for cable and accessory
- Included a comprehensive accessory kit

PRODUKTDATEN

Dimensions L x W x H	445 x 136 x 328 mm
Operating pressure max.	8 bar
Intake capacity	180 L/min
Cable length	3 m
Hose length	3 m
Speed max.	3750 rpm
Motor	220 – 240 V~ / 50 Hz
Input	1100 W

LOGISTISCHE DATEN

Weight net / gross	5.5 / 6 kg
Packaging dimensions	450 x 140 x 330 mm
Order No	5906127901
Barcode	4046664068365
20 Container	1200 pcs
40 Container	2400 pcs
40 HQ Container	2800 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

360°

OIL-FREE

2 L
1.5 HP
8 bar













INCLUDED 12 PIECE ACCESSORY KIT

AIR CASE | MOBILE COMPRESSOR

A MAGNIFICENT LITTLE WORKHORSE AT AN INCREDIBLE PRICE! THIS INNOVATIVE COMPRESSOR FROM SCHEPPACH IS A MUST HAVE TOOL FOR EVERY HOME AND SMALL WORKSHOP.

- Comes with a 12 piece accessory kit
- The AIR CASE is compact and portable
- Weighing only 8 kg this compressor can easily be taken on location
- It is free from oil and does not require lubrication, therefore there is no possibility of oils age in transit
- Built-in storage for accessories
- Built-in remote pressure regulator on the hose
- An indispensable aid for the holidays, camping and outdoor games

SPECIFICATIONS

Dimensions L x W x H	560 x 360 x 155 mm
Tank capacity	2 L
Operating pressure max.	8 bar
Intake capacity	180 L/min
Motor	230 – 240 V~
Input	1100 W

LOGISTICAL DATA

Weight net / gross	8 / 9 kg
Packaging dimensions	565 x 365 x 168 mm
Order No	5906118901
Barcode	4046664040309
20 Container	832 pcs
40 Container	1664 pcs
40 HQ Container	1920 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

HC06 | 6 L COMPRESSOR

WITH THE SCHEPPACH HC06 COMPRESSOR YOU GET A POWERFUL BUT NEVERTHELESS COMPLETELY MOBILE OIL FREE COMPRESSOR, WHICH, THANKS TO THE LARGE ACCESSORY KIT, CAN TACKLE THE WHOLE RANGE OF COMPRESSED-AIR TASKS. IT COMES WITH A 6 L AIR TANK AND 1200 W POWER, BY WHICH IT CAN HANDLE EVEN CHALLENGING APPLICATIONS. THE LIGHTWEIGHT 9.8 KG WEIGHT, IN CONJUNCTION WITH THE ERGONOMIC HANDLE, MAKE THE COMPRESSOR MOBILE AND EASY TO TRANSPORT.

- Light 9.8 kg weight
- Compressor features a long-life, oil-free, maintenance-free pump for convenience
- Intake capacity 192 L/min
- Powerful 1200 W
- Tank capacity 6 L
- Operating pressure max. 8 bar
- Comes with large accessory kit
- Ergonomic handle for easy
- Secure stand with rubber feet

OIL-FREE

360°

6 L
1.6 HP
8 bar

PORTABLE & COMPACT





INCLUDED INFLATING GUN, NOZZLES AND NEEDLES FOR INFLATINGS & HIGH QUALITY 5 M HOSE





SPECIFICATIONS

Dimensions L x W x H	355 x 345 x 305 mm
Tank capacity	6 L
Operating pressure max.	8 bar
Intake capacity	192 L/min
Sound level	96 dB(A)
Motor	220 – 240 V~ / 50 Hz
Input	1200 W

LOGISTICAL DATA

Weight net / gross	9.7 / 11.2 kg
Packaging dimensions	395 x 370 x 375 mm
Order No	5906132901
Barcode	4046664069430
20 Container	516 pcs
40 Container	1104 pcs
40 HQ Container	1288 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

INDUCTION MOTOR

24 L
1.5 HP
8 bar

OIL-FREE



INCLUDED 14 PIECE ACCESSORY KIT

SPECIFICATIONS

Dimensions L x W x H	560 x 300 x 590 mm
Tank capacity	24 L
Operating pressure max.	8 bar
Intake capacity	165 L/min
Sound level	96 dB(A)
Motor	220 – 240 V~
Input	1100 W

LOGISTICAL DATA

Weight net / gross	20 / 21 kg
Packaging dimensions	548 x 320 x 580 mm
Order No	5906112904
Barcode	4046664067986
20 Container	360 pcs
40 Container	720 pcs
40 HQ Container	816 pcs



HC25o | 24 L COMPRESSOR

THE SCHEPPACH 24 L OIL FREE AIR COMPRESSOR IS THE IDEAL COMPRESSOR FOR ALL OF YOUR NEEDS.
IT CAN EASILY HANDLE A VARIETY OF JOBS FROM INFLATION TO STAPLING.

- The HC25o is compact and portable
- 24 litre tank for continuous operation of air tools
- Maintenance-free, oilless pump
- The HC25o is capable of running a wide selection of air tools including tyre inflators, blow guns and many more
- The Scheppach HC25o represents an incredible value for money
- 2 pressure gauges and 2 quick-release couplings for regulated working pressure
- Max. 8 bar vessel pressure
- Comes with a 14 piece accessory kit

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

PROFESSIONAL



OIL LUBRICATED

24 L
2.0 HP
8 bar

360°



SPECIFICATIONS

Dimensions L x W x H	560 x 310 x 570 mm
Tank capacity	24 L
Operating pressure max.	8 bar
Intake capacity	220 L/min
Sound level	93 dB(A)
Motor	230 V~ / 50 Hz
Input	1500 W

LOGISTICAL DATA

Weight net / gross	21 / 23 kg
Packaging dimensions	580 x 250 x 580 mm
Order No	5906135901
Barcode	4046664072980
20 Container	360 pcs
40 Container	720 pcs
40 HQ Container	720 pcs



HC26 | 24 L COMPRESSOR

THIS COMPRESSOR IS IDEAL FOR BOTH HEAVY DUTY AND LIGHT APPLICATIONS. IT IS EQUIPPED WITH WHEELS FOR EASY TRANSPORTATION, SO IT CAN BE USED ANYWHERE.

- Tank capacity 24 L
- Max. 8 bar vessel pressure
- Oil lubricated pump
- Pressure gauge and quick-release coupling for regulated working pressure
- Come with wheels for easy maneuverability

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178



SPECIFICATIONS

Dimensions L x W x H	710 x 410 x 680 mm
Tank capacity	50 L
Operating pressure max.	8 bar
Intake capacity	220 L/min
Sound level	97 dB(A)
Motor	230 V~
Input	1500 W

LOGISTICAL DATA

Weight net / gross	30 / 33 kg
Packaging dimensions	760 x 325 x 655 mm
Order No	5906103901
Barcode	4046664020271
20 Container	156 pcs
40 Container	324 pcs
40 HQ Container	420 pcs



HC54 | 50 L COMPRESSOR

THE SCHEPPACH HC54 AIR COMPRESSOR IS DESIGNED WITH THE DIY, HOBBY AND SEMI-PROFESSIONAL USER IN MIND. BUILT TO COMBINE HIGH QUALITY, SAFETY AND RELIABILITY WITH UNBEATABLE VALUE FOR MONEY.

- The HC54 is compact and portable
- 50 litre tank for continuous operation of air tools such as spray guns
- The HC54 is capable of running a wide selection of air tools including tyre inflators, blow guns and many more
- Oil lubricated pump
- Pressure gauge and quick-release coupling for regulated working pressure
- Max. 8 bar vessel pressure
- Non-return valve
- Comes with wheels and handle for easy maneuverability

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

50 L

2.0 HP

10 bar

360°

OIL LUBRICATED



PRESSURE GAUGE





INCLUDED OIL

HC60 | 50 L COMPRESSOR

THE HC60 COMPRESSOR IS SPECIALLY BUILT FOR THE NEEDS OF THE DIY AND SEMI-PROFESSIONAL USERS. IT OFFERS A FANTASTIC COMBINATION OF PERFORMANCE, SAFETY AND VALUE.

- Tank capacity 50 L
- Powerful 1500 W
- Pressure gauge and quick-release coupling for regulated working pressure
- Operating pressure max. 10 bar
- Comes with wheels for easy maneuverability
- Included oil ultra performance longlife sae 5W-40 280 ml

SPECIFICATIONS	
Dimensions L x W x H	730 x 355 x 655 mm
Tank capacity	50 L
Operating pressure max.	10 bar
Intake capacity	225 L/min
Sound level	97 dB(A)
Motor	230 V~ / 50 Hz
Input	1500 W

LOGISTICAL DATA	
Weight net / gross	26 / 28 kg
Packaging dimensions	745 x 330 x 640 mm
Order No	5906128901
Barcode	4046664069386
20 Container	162 pcs
40 Container	324 pcs
40 HQ Container	432 pcs

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

PROFESSIONAL

50 L
3.0 HP
8 bar

360°



OIL LUBRICATED

DOUBLE CYLINDER

HC52DC | 50 L COMPRESSOR

THE SCHEPPACH HC52DC DOUBLE CYLINDER AIR COMPRESSOR OFFERS A FANTASTIC COMBINATION OF PERFORMANCE, SAFETY AND VALUE FOR MONEY.

- A compact and powerful unit with 412 L/min air displacement
- 8 bar (approx. 115 psi) maximum working pressure
- Directly driven by a high performance 3.0 HP peak motor
- The 50 litre tank is very quickly re-charged
- The double cylinder air compressor ensures a high intake capacity
- Able to drive nearly all air tools
- 2 pressure gauges and 2 quick-release couplings for regulated working pressure
- Comes with wheels and handle for easy maneuverability

SPECIFICATIONS

Dimensions L x W x H	865 x 370 x 685 mm
Tank capacity	50 L
Operating pressure max.	8 bar
Intake capacity	412 L/min
Sound level	97 dB(A)
Motor	230 V~
Input	2200 W

LOGISTICAL DATA

Weight net / gross	40 / 44.8 kg
Packaging dimensions	940 x 385 x 710 mm
Order No	5906101901
Barcode	4046664020103
20 Container	126 pcs
40 Container	270 pcs
40 HQ Container	270 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

PROFESSIONAL

50 L
3.0 HP
10 bar

OIL LUBRICATED

DOUBLE CYLINDER

360°





HC53DC | 50 L COMPRESSOR

THIS TWIN CYLINDER SCHEPPACH AIR COMPRESSOR OFFERS A FANTASTIC COMBINATION OF PERFORMANCE, SAFETY AND VALUE FOR MONEY. AN EXCELLENT MEDIUM SIZED MACHINE FOR MOST WORKSHOP SITUATIONS, SUCH AS GARAGES, JOINERY WORKSHOPS, AND GENERAL WOODWORKING.

- A compact and powerful unit with 412 L/min air displacement
- 10 bar maximum working pressure
- Directly driven by a high performance 3.0 HP peak motor
- The 50 litre tank is very quickly recharged
- The double cylinder air compressor ensures a high intake capacity
- 2 pressure gauges and 2 quick-release couplings for regulated working pressure
- Comes with wheels and handle for easy maneuverability

SPECIFICATIONS

Dimensions L x W x H	910 x 415 x 680 mm
Tank capacity	50 L
Operating pressure max.	10 bar
Intake capacity	412 L/min
Sound level	97 dB(A)
Motor	230 V~
Input	2200 W

LOGISTICAL DATA

Weight net / gross	41 / 45.8 kg
Packaging dimensions	925 x 385 x 690 mm
Order No	5906102901
Barcode	4046664020110
20 Container	108 pcs
40 Container	216 pcs
40 HQ Container	216 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

PROFESSIONAL

50 L
2.5 HP
10 bar

360°

OIL-FREE

DOUBLE CYLINDER





SPECIFICATIONS

Dimensions L x W x H	715 x 415 x 665 mm
Tank capacity	50 L
Operating pressure max.	10 bar
Intake capacity	322 L/min
Sound level	97 dB(A)
Motor	230 V~
Input	1800 W

LOGISTICAL DATA

Weight net / gross	33.9 / 38.8 kg
Packaging dimensions	770 x 380 x 740 mm
Order No	5906129901
Barcode	4046664069409
20 Container	126 pcs
40 Container	270 pcs
40 HQ Container	270 pcs

HC54DC | 50 L PRO. TWIN CYLINDER AIR COMPRESSOR

STRONG AND RELIABLE PARTNER FOR YOUR WORKSHOP, GARAGE OR CONSTRUCTION SITE. THE MAINTENANCE-FREE AND LONG-LIFE OIL-FREE TWIN-CYLINDER MOTOR ALWAYS SUPPLIES YOU WITH ENOUGH POWER TO TACKLE EVEN HEAVY-DUTY TASKS. THANKS TO ANTI-VIBRATION FEET AND THE LARGE WHEELS, IT IS QUIET AND HAS LOW VIBRATION WHILE OPERATING AND IS EASY TO TRANSPORT WITHOUT A LOT OF EFFORT.

- Powerful 322 L/min air displacement
- Compressor features a long-life, oil-free, maintenance-free pump for convenience
- Max. 10 bar vessel pressure
- Powerful 2.5 HP motor
- The double cylinder air compressor ensures a high intake capacity and quick filling of the vessel
- Pressure gauge for regulated working pressure
- 50 L tank
- Comes with wheels for easy maneuverability
- Anti-vibration feet
- 2 quick-release couplings enable the operation of 2 air tools at the same time

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

PROFESSIONAL

100 L
3.0 HP
8 bar



OIL LUBRICATED

DOUBLE CYLINDER

HC100DC | 100 L COMPRESSOR

POWER UP PNEUMATIC NAILERS, IMPACT WRENCHES, RATCHETS AND MORE WITH THIS AIR COMPRESSOR FROM SCHEPPACH. IT DELIVERS ENOUGH AIR POWER TO TACKLE ALL NAILING JOBS AND WORKS WITH MOST MODERATE AIR-TOOL APPLICATIONS.

- An excellent medium sized machine for most workshop situations, such as garages, joinery workshops, and general woodworking
- A compact and powerful unit with 412 L/min air displacement
- 8 bar maximum working pressure
- Powered by a high performance 3.0 HP peak motor
- The 100 litre tank is very quickly recharged
- The double cylinder air compressor cares for a high intake capacity
- Able to drive nearly all air tools
- Pressure gauge and quick-release coupling for regulated working pressure
- Comes with wheels and handle for easy maneuverability
- Air-filled wheels for easy operation





LOGISTICAL DATA

Weight net / gross	52 / 57 kg
Packaging dimensions	1085 x 385 x 810 mm
Order No	5906120901
Barcode	4046664042143
20 Container	50 pcs
40 Container	108 pcs
40 HQ Container	180 pcs



SPECIFICATIONS

Dimensions L x W x H	1070 x 490 x 815 mm
Tank capacity	100 L
Operating pressure max.	8 bar
Intake capacity	412 L/min
Sound level	97 dB(A)
Motor	230 V~
Input	2200 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

PROFESSIONAL

100 L
2.5 HP
8 bar

360°

OIL-FREE

DOUBLE CYLINDER



SPECIFICATIONS

Dimensions L x W x H	1050 x 420 x 850 mm
Tank capacity	100 L
Operating pressure max.	8 bar
Intake capacity	322 L/min
Sound level	97 dB(A)
Motor	230 V~
Input	1800 W

LOGISTICAL DATA

Weight net / gross	45 / 50 kg
Packaging dimensions	1085 x 390 x 820 mm
Order No	5906133901
Barcode	4046664072850
20 Container	50 pcs
40 Container	108 pcs
40 HQ Container	180 pcs



HC104DC | 100 L PRO. TWIN CYLINDER AIR COMPRESSOR

THE SCHEPPACH COMPRESSOR HC104DC IS THE PERFECT COMPANION FOR YOUR DIY OR PROFESSIONAL ACTIVITIES IN YOUR OWN GARAGE OR ON THE JOBSITE. ITS OIL-FREE LOW-MAINTENANCE DOUBLE CYLINDER MOTOR GUARANTEES LONG PERFORMANCES FOR NEARLY ALL APPLICATIONS. THE COMPRESSOR FEATURES ANTI-VIBRATIONS SUPPORT FEET FOR QUIET OPERATION AND WHEELS FOR EASY TRANSPORTATION.

- Powerful 322 L/min air displacement
- Oil-free low-maintenance compressor for long life
- Max working pressure 8 bar
- Powerful 2.5 HP motor
- Double cylinder provides high air intake capacity
- Pressure gauge and quick-release coupling for regulated working pressure
- 100 L tank
- Wheels for easy transportation
- Anti-vibration support feet
- 2 quick-release couplings for use of 2 pneumatic tools

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

PROFESSIONAL

100 L
2.5 HP
10 bar

360°

OIL-FREE

DOUBLE CYLINDER



2 PRESSURE GAUGES



HC105DC | 100 L PRO. TWIN CYLINDER AIR COMPRESSOR

HTHE SCHEPPACH HC105DC IS A STRONG AND RELIABLE PARTNER FOR YOUR WORKSHOP, GARAGE OR CONSTRUCTION SITE. THE MAINTENANCE-FREE AND LONG-LIFE OIL-FREE TWIN-CYLINDER MOTOR ALWAYS SUPPLIES YOU WITH ENOUGH POWER TO TACKLE EVEN HEAVY-DUTY TASKS. THANKS TO ANTI-VIBRATION FEET AND THE LARGE WHEELS, IT IS QUIET AND HAS LOW VIBRATION WHILE OPERATING AND IS EASY TO TRANSPORT WITHOUT A LOT OF EFFORT.

- Powerful 322 L/min air displacement
- Compressor features a long-life, oil-free, maintenance-free pump for convenience
- Max. 10 bar vessel pressure
- Powerful 2.5 HP motor
- The double cylinder air compressor ensures a high intake capacity and quick filling of the vessel
- Pressure gauge for regulated working pressure
- 100 L tank
- Comes with wheels for easy maneuverability
- Anti-vibration feet
- 2 quick-release couplings enable the operation of 2 air tools at the same time

SPECIFICATIONS

Dimensions L x W x H	1050 x 420 x 820 mm
Tank capacity	100 L
Operating pressure max.	10 bar
Intake capacity	322 L/min
Sound level	97 dB(A)
Motor	230 V~
Input	1800 W

LOGISTICAL DATA

Weight net / gross	51 / 56 kg
Packaging dimensions	1085 x 390 x 820 mm
Order No	5906134901
Barcode	4046664072867
20 Container	50 pcs
40 Container	108 pcs
40 HQ Container	180 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

PROFESSIONAL

100 L
3 HP
10 bar

BELT DRIVE

3 CYLINDER



HC550TC | 100 L BELT-DRIVEN COMPRESSOR

SCHEPPACH´S HC550TC IS A BRAND NEW THREE-CYLINDER BELT-DRIVEN COMPRESSOR TO TACKLE THE MOST DEMANDING CHALLENGES. THIS 100 L COMPRESSOR FEATURES A 3 HP MOTOR, AS WELL AS A 550 L/MIN AIR INTAKE CAPACITY AND A 10 BAR OPERATING PRESSURE. IDEAL FOR DIY ENTHUSIASTS AND CRAFTSMEN.

- Powerful 550 L/min air displacement
- High-efficiency induction motor
- Max. 10 bar vessel pressure
- Powerful 3 HP motor
- The 3 cylinder air compressor ensures a high intake capacity and quick filling of the vessel
- Pressure gauge and quick-release coupling for regulated working pressure
- 100 L tank
- Comes with wheels for easy maneuverability
- Anti-vibration feet
- Quick-release coupling enables the operation of 2 air tools at the same time

SPECIFICATIONS

Dimensions L x W x H	1000 x 420 x 870 mm
Tank capacity	100 L
Operating pressure max.	10 bar
Intake capacity	550 L/min
Sound level	97 dB(A)
Motor	230 V~
Input	2200 W

LOGISTICAL DATA

Weight net / gross	74 / 80 kg
Packaging dimensions	1070 x 380 x 860 mm
Order No	5906136901
Barcode	4046664073994
20 Container	90 pcs
40 Container	198 pcs
40 HQ Container	198 pcs

PROFESSIONAL

24 L
2.0 HP
10 bar

OIL-FREE

HC24V | 24 L COMPRESSOR

AN ESPECIALLY COMPACT AND PORTABLE AIR COMPRESSOR IDEAL FOR SITE WORK AND ESPECIALLY USEFUL IN AWKWARD LOCATIONS.

- 24 litre tank
- The HC24V is capable of running a wide selection of air tools including tyre inflators, blow guns and many more
- Compressor features a long life, oil-free, maintenance free pump for convenience
- Pressure gauge and quick-release coupling for regulated working pressure
- Max. 10 bar vessel pressure

360°







LOGISTICAL DATA

Weight net / gross	16.2 / 17.7 kg
Packaging dimensions	345 x 325 x 665 mm
Order No	5906117901
Barcode	4046664040293
20 Container	416 pcs
40 Container	836 pcs
40 HQ Container	952 pcs



SPECIFICATIONS

Dimensions L x W x H	340 x 305 x 660 mm
Tank capacity	24 L
Operating pressure max.	10 bar
Intake capacity	180 L/min
Sound level	95 dB(A)
Motor	230 – 240 V~
Input	1500 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

HC30V | 30 L COMPRESSOR

THIS 30 L VERTICAL TANK WITH HIGH AIR FLOW FEATURES AN OIL-FREE PUMP AND CAN DO ALL DIY JOBS SUCH AS NAILER/ STAPLER, FINISHING/FRAMING NAILER, ROOFING NAILER, IMPACT WRENCH, RATCHET, AIR HAMMER, SPRAY GUN, DRILL, SCREWDRIVER, ETC.

- 30 litre tank for continuous operation of air tools such as spray guns
- The HC30V is capable of running a wide selection of air tools
- Compressor features a long-life, oil-free, maintenance-free pump for convenience
- Pressure gauge and quick-release coupling for regulated working pressure
- Max. 10 bar vessel pressure
- Vertical tank for space saving

30 L
2.0 HP
10 bar

OIL-FREE







SPECIFICATIONS

Dimensions L x W x H	340 x 345 x 740 mm
Tank capacity	30 L
Operating pressure max.	10 bar
Intake capacity	180 L/min
Sound level	95 dB(A)
Motor	230 V~
Input	1500 W

LOGISTICAL DATA

Weight net / gross	17 / 18.9 kg
Packaging dimensions	330 x 320 x 725 mm
Order No	5906121901
Barcode	4046664042532
20 Container	357 pcs
40 Container	726 pcs
40 HQ Container	838 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

HC51V | 50 L COMPRESSOR

THE SCHEPPACH 50 L COMPRESSOR IS IDEAL FOR A HOST OF INFLATING AND NAILING TASKS. THIS TALL, SLIM, VERTICAL DESIGN IS ESPECIALLY USEFUL IN AREAS WITH LITTLE ROOM OR RESTRICTED FLOOR SPACE. DESIGNED WITH THE DIY, HOBBY AND SEMI-PROFESSIONAL USER IN MIND

- 50 litre tank
- The HC51V is capable of running a wide selection of air tools including tyre inflators, blow guns and many more
- Compressor features a long-life, oil-free, maintenance-free pump for convenience
- Pressure gauge and 2 quick-release couplings for regulated working pressure
- Max. 10 bar vessel pressure
- Non-return valve
- Integrated carry handle

50 L
2.0 HP
10 bar

OIL-FREE

360°







SPECIFICATIONS

Dimensions L x W x H	355 x 345 x 980 mm
Tank capacity	50 L
Operating pressure max.	10 bar
Intake capacity	220 L/min
Sound level	97 dB(A)
Motor	230 V~
Input	1500 W

LOGISTICAL DATA

Weight net / gross	22.5 / 24.5 kg
Packaging dimensions	345 x 325 x 1030 mm
Order No	5906125901
Barcode	4046664063674
20 Container	228 pcs
40 Container	484 pcs
40 HQ Container	556 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

24 L
0.75 HP
8 bar

DOUBLE CYLINDER

OIL-FREE

360°







HC24Si | 24 L SILENT COMPRESSOR

WHISPER QUIET BUT STILL POWERFUL - THE SCHEPPACH HC24SI SILENT COMPRESSOR. THE 24 L VESSEL AND THE 120 L/MIN AIR INTAKE SUPPLY YOU WITH THE POWER YOU NEED FOR ALL TASKS IN AND AROUND YOUR HOME. THE 0.75 HP ENGINE WORKS EXTREMELY QUIETLY AT ONLY 78 DB, WHICH EQUATES TO A REGULAR CONVERSATION, MAKING THE AIR COMPRESSOR A PERFECT FIT FOR APPLICATIONS WHERE LOUD NOISE IS UNDESIRABLE.

- 24 litre tank for continuous operation of air tools
- Max. 8 bar tank pressure
- Maintenance free oilless pump
- Whisper quiet 60 dB noise
- Large wheels for easy transport
- 120 L/min air intake
- Anti-vibration feet for smooth work
- T2 quick release couplings

SPECIFICATIONS

Dimensions L x W x H	550 x 280 x 565 mm
Tank capacity	24 L
Operating pressure max.	8 bar
Intake capacity	120 L/min
Sound level (LpA)	60 dB(A)
Motor	230 V~ 50 Hz
Input	550 W

LOGISTICAL DATA

Weight net / gross	20 / 22 kg
Packaging dimensions	565 x 250 x 570 mm
Order No	5906131901
Barcode	4046664069423
20 Container	240 pcs
40 Container	480 pcs
40 HQ Container	656 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

DOUBLE CYLINDER

OIL-FREE

50 L
1.0 HP
8 bar







360°

HC50Si | 50 L SILENT COMPRESSOR

BIG AIRFLOW COMBINED WITH WHISPER QUIET OPERATION. THE SCHEPPACH HC50SI PRODUCES ONLY 79 DB EVEN UNDER FULL THROTTLE, AND IS NO LOUDER THAN A REGULAR CONVERSATION. THE AIR COMPRESSOR PERFECTLY SUITS APPLICATIONS WHERE LOUD NOISE IS UNDESIRABLE. WITH ITS 50 L TANK AND POWERFUL 1.0 HP ENGINE, THE COMPRESSOR TACKLES EVERY TASK IN AND AROUND YOUR HOME.

- 50 litre tank for continuous operation of air tools
- Max. 8 bar tank pressure
- Maintenance free oilless pump
- Whisper quiet 60 dB noise
- Large wheels for easy transport
- 170 L/min air intake
- Anti-vibration feet for smooth work
- 2 quick release couplings

SPECIFICATIONS

Dimensions L x W x H	730 x 300 x 620 mm
Tank capacity	50 L
Operating pressure max.	8 bar
Intake capacity	170 L/min
Sound level (LpA)	67 dB(A)
Motor	230 V~ / 50 Hz
Input	750 W

LOGISTICAL DATA

Weight net / gross	27 / 29 kg
Packaging dimensions	740 x 330 x 650 mm
Order No	5906130901
Barcode	4046664069416
20 Container	160 pcs
40 Container	320 pcs
40 HQ Container	440 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 178

ADVANTAGES

- ✓ Minimum worker fatigue
- ✓ Maximum output compared to hand digging
- ✓ Multiple garden and site operations
- ✓ High efficiency low consumption compressor. Air required is only 160 litres per minute (2 HP compressor)



AERO$_2$ SPADE PNEUMATIC 5 IN 1 MULTI TOOL

MAKE LIGHT WORK OF LANDSCAPING AND ON-SITE DIGGING WITH THE NEW SCHEPPACH AERO$_2$ SPADE. IDEAL FOR LANDSCAPERS, HOME OWNERS, AND LIGHT INDUSTRIAL BUILDING SITE USERS. MULTI-APPLICATION USE WITH INCLUDED TOOLS.

- Compact design allows ergonomic work even in difficult-to-reach
- Vibration-dampening rubber grip
- Quick and easy tool changes
- Working pressure 6.3 bar
- Forged spade blade

INCLUDED SPADE, FLAT SCRAPER BLADE, 60 MM FLAT CHISEL, 25 MM FLAT CHISEL & POINTED CHISEL



PLUS X AWARD
2018 achieved for:
Innovation
High Quality
Ease of Use
Functionality

selbst ist der Mann
Das Do-it-yourself-Magazin
SELBST AUSPROBIERT
RESULT: TTTTT
Rated as "VERY GOOD"
Edition 10/2018
www.selbst.de

Scheppach Aero2spade
Oberklasse
Heimwerker Praxis 4/2018
1,4
Preis/Leistung: gut – sehr gut

Scheppach Aero2spade
Alles für den Garten
BestOF Heimwerker Praxis 2019
1,4
Preis/Leistung: gut – sehr gut





POINTED CHISEL
Is used primarily on concrete. Having a sharp tip rather than a sharp edge means that this chisel is better suited to cutting through concrete

FLAT CHISEL (25 mm)
A flat chisel may sometimes be used in order to outline any channels

FLAT CHISEL (60 mm)
Demolition tool for stripping away plaster, tiles, renders and motars from walls

FLAT SCRAPER BLADE
Ideal for removal of paint, printing ink, impacted soil, linoleum, adhesive compounds

SPADE (FORGED)
Is particularly useful for severing roots and excavations or when working in areas containing services or tree roots. The spade is manufactured in forged steel.

MULTI-FUNCTIONAL IN GARDEN & CONSTRUCTION



SPECIFICATIONS

Dimensions L x W x H	820 x 360 x 75 mm
Operating pressure max.	6.3 bar
Intake capacity max.	280 L/min

COMPRESSOR RECOMMENDATIONS

24 L compressor	Minor excavation work
50 L compressor	Medium heavy excavation work, removal of roots
100 L compressor	Heavy excavation work, breaking work

LOGISTICAL DATA

Weight net / gross	9.6 / 11 kg
Packaging dimensions	835 x 375 x 70 mm
Order No	5909601900
Barcode	4046664064299
20 Container	1010 pcs
40 Container	2020 pcs
40 HQ Container	2020 pcs





A 3/8" REVERSIBLE AIR DRILL KIT
THIS COMPACT, LIGHTWEIGHT AND REVERSIBLE UNIT IS IDEAL FOR GENERAL WORKSHOP, GARAGE OR FACTORY USE

- Easy-to-use forward / reverse switch
- Compact push handle design
- Working pressure is 91 PSI (6.3 bar)
- Average air consumption: 141 L/min
- Includes 10 x HSS drill bits, 6 x CrV bits and 1 bit holder, lubricator, oil, wrench for chuck
- Comes with blow moulded case

Order No: 7906100714
Barcode: 4046664041924



B 2IN1 NAIL AND STAPLE GUN
A LIGHTWEIGHT, HIGH-PERFORMANCE AND EASY TO USE AIR STAPLER / NAILER PERFECT FOR A WIDE RANGE OF APPLICATIONS

- Nailer capacity: 15 – 50 mm, 18-gauge brad nails
- Staples capacity: 16 – 40 mm
- Air consumption per shoot: 1.5 L
- Easy-to-use – 360° adjustable exhaust port
- Kit includes: 1000 x brad nails, nailer, 1000 x staples, hex wrench, safety goggles and oil
- Comes with blow moulded case

Order No: 7906100715
Barcode: 4046664041931



C AIR HAMMER KIT
IDEAL FOR CUTTING METAL SHEET, REMOVING STUBBORN FITTINGS AND MINOR DEMOLITION WORK

- Delivers 4500 blows per minute
- Working pressure is 91 PSI (6.3 bar)
- Average air consumption: 79.2 L/min
- Polished metal body with protective rubber grip
- This robust air hammer is supplied complete with a selection of 5 chisels
- Kit includes: 5 chisels and oil
- Comes with blow moulded case

Order No: 7906100716
Barcode: 4046664041948



D 1/2" AIR IMPACT WRENCH KIT
IDEAL FOR CHANGING, GENERAL ASSEMBLY WORK AND OTHER WORKSHOP APPLICATIONS

- 7000 rpm helps provide high power fastening
- 312 Nm working torque
- Average air consumption: 141 L/min
- 1-hand operation-forward / reverse switch for quick and easy switching
- Kit includes: impact wrench, 10 x 1/2" sockets, extension, lubricator and oil
- Comes with blow moulded case

Order No: 7906100717
Barcode: 4046664041955





E 1/2" REVERSIBLE AIR RATCHET KIT
A VERSATILE, REVERSIBLE TOOL IDEAL FOR AUTOMOTIVE AND WORKSHOP USE

- Delivers 68 Nm of torque for fast removal of stubborn fasteners
- Average air consumption: 77 L/min
- Conveniently located forward and reverse switch for quick direction changes
- Comes with 7 x various sized 1/2" sockets, 1 x 1/2" extension bar, 1 x 1/2" U joint, 3 x bit, 1 x bit holder and oil pot
- Comes with blow mould case

Order No: 7906100718
Barcode: 4046664041962



F 6" DUAL ACTION RANDOM ORBITAL SANDER
GIVES A SMOOTH, VIRTUALLY SCRATCH FREE FINISH ON A VARIETY OF SURFACES

- Max air pressure: 6.3 bar
- 10000 rpm at top speed
- Average air consumption: 93.4 L/min
- Suitable for 150 mm diameter sanding disks
- Tough reinforced aluminium housing
- for increased durability
- Kit includes: 1 x oil pot,1 x 6" velcro sanding pad,1 x coil tape, 1 x protection cuff and 5 x 6" sanding paper

Order No: 7906100719
Barcode: 4046664041979



G AIR SANDBLASTER GUN KIT
IDEAL FOR ELIMINATING RUST SPOTS AND CLEANING OTHER VERY LOCALISED AREAS

- Working pressure: 3 – 4 bar
- Air consumption: 113 L/min
- Recycling bag automatically collects used abrasive
- Kit includes: 4 x nozzles, 1 x 0.5 kg sand (bottle) and 1 x white collection bag

Order No: 7906100720
Barcode: 4046664041986



H AIR GRAVITY SPRAY GUN
POPULAR CHOICE FOR AUTO REFINISHING AND MANUFACTURING TRADES

- Air consumption: 120 – 205 L/min
- Working pressure: 2 – 3.5 bar
- Paint cup capacity is 600 ml
- Includes adjustment knobs for air, liquid and spray pattern

Order No: 7906100721
Barcode: 4046664041993

I 5 PIECES AIR TOOL KIT




J 5 PIECES AIR TOOL KIT



K 8 PIECES AIR TOOL KIT



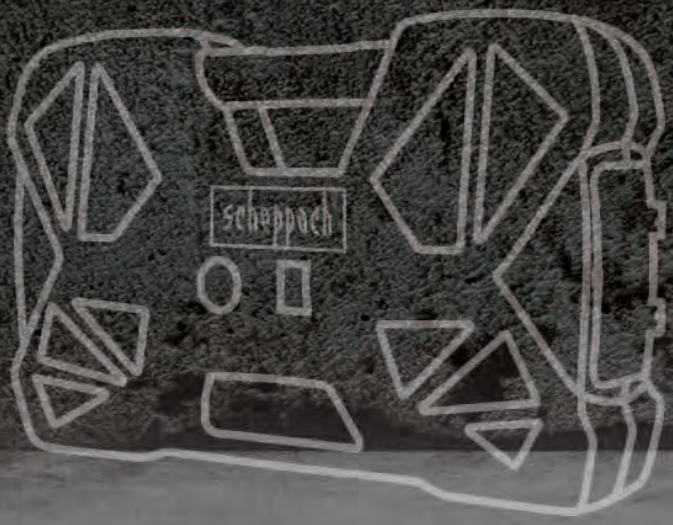

I 5 PIECES AIR TOOL KIT

FIVE OF THE MOST POPULAR WORKSHOP TOOLS FOR USE WITH DIY AND HOBBY AIR COMPRESSORS

The kit includes:

- Gravity fed spray gun – suitable for most spray painting applications
- Air wash gun with steel pot – for cleaning and degreasing applications
- Tyre inflator – with rubber gauge protector, dual scale (bar/psi) gauge and deflation button
- Air blow gun – suitable for cleaning and drying application
- 5 metre air recoil hose – for easy connection

Order No: 3906101704
Barcode: 4046664005568

J 5 PIECES AIR TOOL KIT

THREE POPULAR ACCESSORIES TO SUIT ANY AIR COMPRESSOR

The kit includes:

- Tyre inflator – with rubber gauge protector, dual scale (bar/psi) gauge and deflation button
- 5 metre air recoil hose – for easy connection
- 3 inflating nozzles

Order No: 7906100724
Barcode: 4046664042020

K 8 PIECES AIR TOOL KIT

PERFECT FOR THE DO-IT-YOURSELFER, RIGHT UP TO THE PROFESSIONAL. FIVE OF THE MOST POPULAR WORKSHOP TOOLS FOR USE WITH DIY AND HOBBY AIR COMPRESSORS & NOZZLES

The kit includes:


- Gravity fed spray gun – suitable for most spray painting applications
- Air wash gun with steel pot – for cleaning and degreasing applications
- Tyre inflator – with rubber gauge protector, dual scale (bar/psi) gauge and deflation button
- Air blow gun – suitable for cleaning and drying application
- 5 metre air recoil hose – for easy connection
- 3 inflating nozzles

Order No: 7906100723
Barcode: 4046664042013

L 13 PIECES ACCESSORY KIT ENSEMBLE



M SPLITTER (AIR QUICK CONNECTORS)

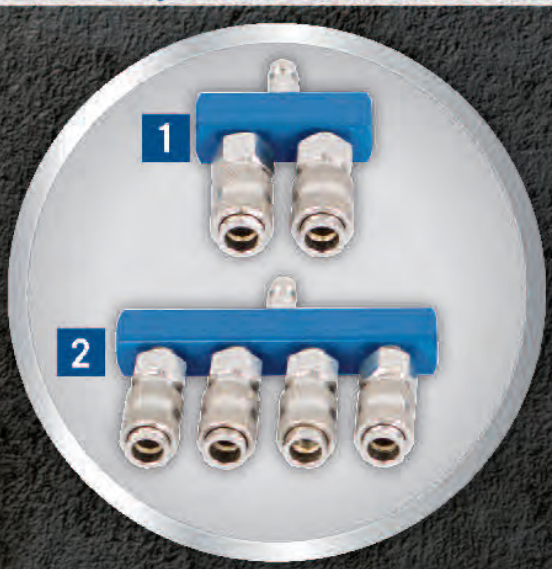

N 15 METRE RUBBER AIR HOSE



O OIL ULTRA PERFORMANCE



L 13 PIECES ACCESSORY KIT ENSEMBLE
USE FOR MULTIPLE APPLICATIONS:
AIR DUSTING, INFLATING, PRESSURE CHECKING, AND AIR LINE CONNECTION

The kit includes:
- Tyre inflator – with rubber gauge protector, dual scale (bar/psi) gauge and deflation button
- Air blow gun – suitable for cleaning and drying application
- 11 x assorted accessories (hose, nozzles, etc.)

Order No: 7906100710
Barcode: 4046664040125

M SPLITTER (AIR QUICK CONNECTORS)
ALLOWS CONNECTION OF SEVERAL TOOLS TO A SINGLE OUTLET

1 2-way air manifold and splitter
- Durable and lightweight aluminium construction
- For longer life and smoother operation than standard couplers

Order No.: 7906100722
Barcode: 4046664042006

2 4-way air manifold and splitter
- Durable and lightweight aluminium construction
- For longer life and smoother operation than standard couplers

Order No: 7906100725
Barcode: 4046664042112

N 15 METRE RUBBER AIR HOSE
FOR PERFORMANCE AND SAFETY IN PROFESSIONAL GARAGES AND WORKSHOPS

- High quality rubber hose
- 8 mm (5/16") bore inner core
- Working pressure up to 20 bar / 290 PSI

Order No: 7906100711
Barcode: 4046664040132

O OIL ULTRA PERFORMANCE
LONGLIFE SAE 5W-40

500 ml

Order No: 3906100701
Barcode: 4014915073512

TW1000 | TOOL CABINET

ALWAYS GET THE RIGHT TOOL. THE SCHEPPACH TW1000 ROLLER CABINET IS A FULLY LOADED WORKSHOP ON WHEELS. THE SOLID AND DURABLE ROLLER CABINET COMES EQUIPPED WITH A 263 PIECE TOOL SET. EVERY TOOL HAS ITS OWN, PERFECTLY FITTED SPACE AND THEREFORE IS ALWAYS EASY TO FIND. THE 4 LARGE WHEELS WITH TWO CASTORS AND INTEGRATED BRAKE MAKE THE CABINET EASY TO MOVE. THE CABINET'S LARGE TOP SHELF ALLOWS SAFE STORAGE OF OFTEN-USED TOOLS.


- 7 large and easy-pull tool drawers
- Large shelf on the roller cabinet
- Cuttings for extra tool storage
- Large and easy-moving wheels and castors, with integrated brake
- Handle with soft grip for comfortable transport

max. 450 kg

263 x

360°



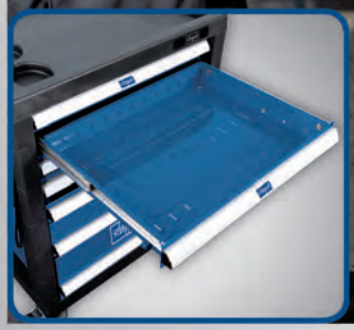

LOGISTICAL DATA

Weight net / gross	66 / 68 kg
Packaging dimensions	780 x 500 x 870 mm
Order No	5909304900
Barcode	4046664071402
40 HQ Container	198 pcs



SPECIFICATIONS

Dimensions L x W x H	770 x 460 x 970 mm
Number of drawers	7
Height of drawers	58 / 128 / 195 mm
Payload max.	450 kg



HAMMER
500 g
PLASTIC HAMMER



COMBINATION SPANNERS
12 pcs



6 SCREWDRIVER SLOT
1 x phase tester,
4 x 100, 5 x 100,
3 x 75, 6 x 150, 6 x 38,
8 x 200



4 CIRCLIP PLIERS
2 for inner rings
2 for outer rings



3 PLIERS
1 pointed pliers
1 side cutting
1 combination pliers





17 PIECE SOCKET WRENCHES INSERTS
10" – 32"
REVERSIBLE RATCHET
1/2"
UNIVERSAL CONNECTION
1/2"
2X EXTENSION
5" + 10"
SLIDING ADAPTER
1/2"



13X SOCKET WRENCH INSERTS
4" – 14"
REVERSIBLE RATCHET
1/4"
UNIVERSAL CONNECTION
1/4"
2X EXTENSIONS
2" + 4"
SLIDING ADAPTER
1/4"
SCREWDRIVER
1/4"



6 PIECE INSULATED SCREWDRIVERS
(-) 3 x 75, 4 x 100, 5,5 x 125 /
(+) PH0 x 75, PH1 x 100, PH2 x 100
7 PIECE PRECISION SCREWDRIVERS
PH0, PH00, PH1,
1,4 x 50, 2 x 50, 2,5 x 50, 3 x 50
ALLEN KEY SET
T40, T30, T27, T25, T20, T15, T10, T9



ALLEN KEY
2 x 100 mm, 2,5 x 100 mm,
3 x 100 mm, 4 x 150 mm,
5 x 150 mm, 6 x 150 mm,



6 PCS CROSSHEAD SCREWDRIVER
PH1 x 100, PH2 x 100, PH2 x 150,
PH0 x 75, PH3 x 200, PH2 x 38



CRIMPING TOOL
200 mm, 160 pcs

max. 450 kg

185 x

360°

TW1800 | PROFESSIONAL TOOL CABINET

SCHEPPACH´S TW1800 IS THE PROFESSIONAL 185 PIECE TOOL CABINET THAT IS A MUST-HAVE FOR YOUR WORKSHOP. WITH SUCH A LARGE VARIETY OF DRAWERS, YOU CAN BE SURE TO FIND THE CORRECT PLACE TO SUIT YOUR SPECIFIC TOOL STORAGE NEEDS AND HAVE THE DESIRED TOOL WITHIN EASY REACH AT ANY TIME. THE CABINET IS EQUIPPED WITH 4 LARGE WHEELS WITH LOCK FUNCTION, FOR EASY TRANSPORTATION AND A TOOL HOLDER BOARD ON THE BACK, WHICH CAN BE EASILY BE REMOVED FOR ALL YOUR NEEDS.

- A roller cabinet with 7 sturdy drawers
- Adjustable tool holder board with lockable roller shutter cabinet
- Large shelf on the roller cabinet
- Cut-outs for further mounting and storage options
- Large wheels with lock function, for easy transportation
- Handle with soft grip for comfortable transport









SPECIFICATIONS

Dimensions L x W x H	932 x 1220 – 1765 x 530 mm
Number of drawers	7 pcs
Number of roller shutter cabinets	1 pc
Height of drawers	58 / 127 / 202 mm
Payload max.	450 kg

LOGISTICAL DATA

Weight net / gross	118.5 / 122 kg
Packaging dimensions	Tool Cabinet: 950 x 540 x 1030 mm Roller shutter cabinet: 875 x 280 x 260 mm
Order No	5909305900
Barcode	4046664072713
20 Container	44 pcs
40 Container	88 pcs





HAMMER
500 g

PLASTIC HAMMER
40 mm

CHISEL
4 pcs 3, 4, 5, 6*150 mm
1 pcs 3*150 mm
2 pcs 15*150 mm 21*200 mm

CALIPER
150 mm

RULER
300 mm

MAGNETIC GRIPPER

COMBINATION PLIERS
8"

SIDE CUTTING
7,5"

POINTED PLIERS
8"

WATER PUMP PLIER
10"



18 X 1/2" SOCKET SET INSERTS
10 – 32 mm

UNIVERSAL CONNECTION
1/2"

1/2" sliding T-bar
250 mm

2 PCS 1/2" EXTENSION
125 – 250 mm

REVERSIBLE RATCHET
1/2"

1/2" E-IMPACT SOCKET
E10, E11, E12, E14 und E16

13 X 1/4" SOCKET SET INSERTS
4 – 14 mm

2 PCS 1/4" EXTENSION
50 – 100 mm

UNIVERSAL CONNECTION
1/4"

Sliding T-bar
1/4"

REVERSIBLE RATCHET
1/4"

SCREWDRIVER
1/4"

1/4" E-IMPACT SOCKET
E4, E5, E6, E7 und E8

11 PCS 1/4" IMPACT SOCKET
4 – 14 mm

14 PCS 1/2" IMPACT SOCKET
8 – 22 mm

30 PCS 1/4" BIT INSERTS
sl 4-5-6, ph 0-1-1-2-2-3-3,
pz 0-1-1-2-2-3-3, h 3-4-5-6-8,
t 8-10-15-20-25-27-30-40

1/2" SPARK PLUG WRENCH
16 – 21 mm



SCREWDRIVERS

7 pcs PH 2*38, 0*75, 1*100,
2*100, 1*125, 2*150, 3*150

6 pcs SL 6*38, 3*75, 4*100,
5,5*100, 6*125, 8*150

6 pcs T 10, 15, 20, 25, 30, 40

6 pcs 2*100 mm, 2,5*100 mm, 3*100 mm,
4*150 mm, 5*150 mm, 6*150 mm



ADJUSTABLE SPANNER
8"

22 PCS COMBINATION SPANNER
8 – 32 mm

11 PCS RATCHET-COMBINATION SPANNER
8 – 19 mm


- HOT START
- ANTISTICKING
- ARC FORCE

1.6 – 3.2 mm

130 AMP

INVERTER TECHNOLOGY

360°

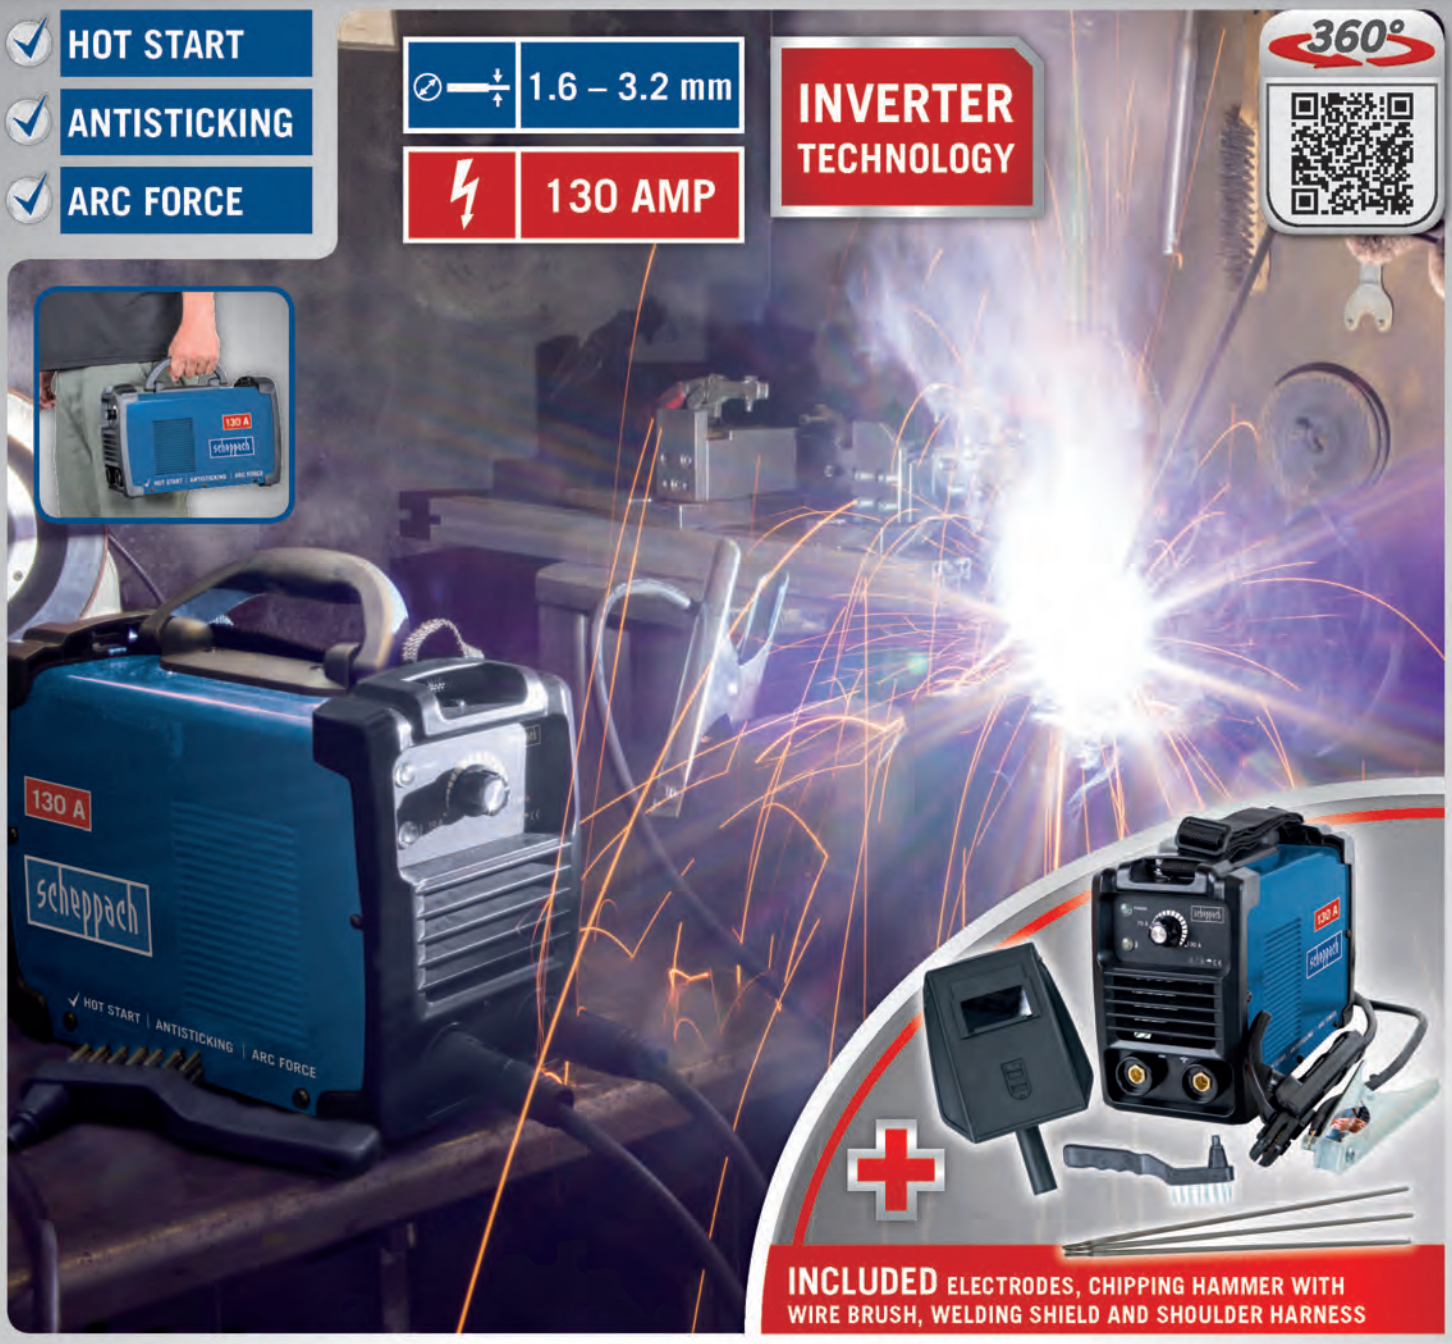

INCLUDED ELECTRODES, CHIPPING HAMMER WITH WIRE BRUSH, WELDING SHIELD AND SHOULDER HARNESS

SPECIFICATIONS

Dimensions L x W x H	280 x 120 x 200 mm
Electrode thickness	1.6 – 3.2 mm
Welding current	10 – 130 A
No-load voltage	85 V
Motor	230 V~ / 50 Hz

LOGISTICAL DATA

Weight net / gross	5.2 / 6 kg
Packaging dimensions	380 x 175 x 240 mm
Order No	5906602903
Barcode	4046664073710
20 Container	1440 pcs
40 Container	2880 pcs
40 HQ Container	3240 pcs



WSE1000 | INVERTER WELDER

THE SCHEPPACH WSE860 INVERTER-WELDER IS IDEAL FOR THE DIY ENTHUSIAST. THE WELDING CURRENT CAN BE CONTROLLED FROM 10 TO 130 A IN ORDER TO PROVIDE EXACTLY THE RIGHT POWER FOR EVERY PURPOSE.

- Innovative inverter technology for longer duty cycle, ultra-compact size and smoothest welding
- Easy, homogeneous bonding of alloy and non-alloy steels, stainless steel and cast iron
- The **ARC FORCE** function monitors the welding current and the welding voltage to ensure an even performance at all times.
- The increased striking voltage with **HOT START** function ensures a stable arc in seconds.
- Effective protection against overheating is provided by a thermostatic cut out with warning lamp
- Long work sessions are also possible thanks to a fan cooling system
- Included electrodes, chipping hammer with wire brush, welding shield and shoulder harness

1.6 – 4.0 mm

160 AMP

- HOT START
- ANTISTICKING
- ARC FORCE



INVERTER TECHNOLOGY





INCLUDED ELECTRODES, CHIPPING HAMMER WITH WIRE BRUSH, WELDING SHIELD AND SHOULDER HARNESS

SPECIFICATIONS

Dimensions L x W x H	330 x 145 x 215 mm
Electrode thickness	1.6 – 4.0 mm
Welding current	20 – 160 A
No-load voltage	85 V
Motor	230 V~ / 50 Hz

LOGISTICAL DATA

Weight net / gross	6.6 / 7.6 kg
Packaging dimensions	385 x 225 x 240 mm
Order No	5906603903
Barcode	4046664073727
20 Container	960 pcs
40 Container	1920 pcs
40 HQ Container	2160 pcs



WSE1100 | INVERTER WELDER

THIS ULTRA-LIGHTWEIGHT AND PORTABLE INVERTER-WELDER IS IDEAL FOR THE DIY ENTHUSIAST. THE WELDING CURRENT CAN BE CONTROLLED FROM 20 TO 160 A IN ORDER TO PROVIDE EXACTLY THE RIGHT POWER FOR EVERY PURPOSE.

- Innovative inverter technology for longer duty cycle, ultra-compact size and smoothest welding.
- Easy, homogeneous bonding of alloy and non-alloy steels, stainless steel and cast iron.
- The **ARC FORCE** function monitors the welding current and the welding voltage to ensure an even performance at all times.
- The increased striking voltage with **HOT START** function ensures a stable arc in seconds.
- Effective protection against overheating is provided by a thermostatic cut out with warning lamp.
- Long work sessions are also possible thanks to a fan cooling system
- Included electrodes, chipping hammer with wire brush, welding shield and shoulder harness.

0.6 – 0.9 mm

90 AMP

360°

ARC WELDER







SPECIFICATIONS

Dimensions L x W x H	347 x 182 x 299 mm
Electrode wire diameter	0.6 / 0.9 mm
Welding current	45 / 90 A
No-load voltage	31 V
Motor	230 V~ / 50 Hz

LOGISTICAL DATA

Weight net / gross	12.5 / 15 kg
Packaging dimensions	475 x 220 x 345 mm
Order No	5906604901
Barcode	4046664069775
20 Container	800 pcs
40 Container	1600 pcs
40 HQ Container	1600 pcs



WSE3200 | INVERTER WELDER

CREATE PERMANENT CONNECTIONS WITH THE SCHEPPACH WSE3200 ARC WELDER. IN COMBINATION WITH THE POWERFUL 3200 W AND 90 AMPS CURRENT, THE WELDER CREATES SAFE AND DURABLE CONNECTIONS. WITH THE ADJUSTABLE AMPERAGE, MATERIAL THICKNESSES FROM 2 – 5 MM CAN BE WELDED.

- Strong 3200 W and 90 A current
- Useable wire diameter 0.6 / 0.9 mm
- Amperage adjustable between 45 A and 90 A
- Extra-long 2 m welding torch
- Welding mask, 3 welding wire spools and brushes included

700 mm

2000 m²/h

360°

INCLUSIVE

16 L
ON-BOARD WASTE CONTAINER











S700 | PUSH SWEEPER

DOMESTIC OR LIGHT INDUSTRIAL: TAKING PRIDE IN YOUR SURROUNDINGS COULD NOT BE EASIER. WHETHER DRIVEWAYS, PATIOS, GARAGE FLOORS OR WORKSHOP FLOORS, THE SCHEPPACH S700 SWEEPER MAKES LIGHT WORK OF MAINTAINING A CLEAN ENVIRONMENT. FIVE TIMES FASTER THAN A BROOM AND FAR HEALTHIER.

- Space-saving and maneuverable
- Very light
- Adjustable handle allows for easy operation
- Equipped with 2 rotating side brushes on the front for cleaning corners and edges
- Sturdy plastic casing
- Dirt collected in large 16 litre hopper

SPECIFICATIONS

Dimensions L x B x H	680 x 580 x 1000 mm
Sweeping width	700 mm
Waste container	16 L
Height adjustment max.	10 mm

LOGISTICAL DATA

Weight net / gross	8.8 / 10 kg
Packaging dimensions	680 x 600 x 210 mm
Order No	5909802900
Barcode	4046664037446
20 Container	350 pcs
40 Container	680 pcs
40 HQ Container	810 pcs



POWERPACK

1400 W

max. 105 bar

















HCE1500 | HIGH PRESSURE CLEANER

THE SCHEPPACH HCE1500 HIGH PRESSURE CLEANER IS COMPACT AND LIGHTWEIGHT, MAKING IT EASY TO MOVE TO VARIOUS LOCATIONS AROUND THE HOUSE AND JOB SITE. THIS HIGH-PRESSURE CLEANER IS A RELIABLE ASSISTANT AROUND YOUR HOME. THE RANGE OF ACCESSORIES ALLOW A WIDE SPECTRUM OF USES.

- Powerful 1400 W Motor with a maximum pressure of 105 bar
- Quick Connect System, for quickly changing the accessories
- Light 6 kg weight for mobile use
- On-board accessory and hose storage
- Ideal for mobile applications
- Durable owing to reliable high-quality aluminium pump
- Included 3 m high pressure hose, cleaning agent container, deck and patio cleaner, spray gun with extension, nozzle, adapter and detergent bottle

SPECIFICATIONS

Dimensions L x W x H	305 x 207 x 415 mm
Pressure max.	105 bar
Rated pressure	70 bar
Flow rate max.	408 L/h
Water temperature max.	50 °C
Inlet water pressure max.	4 bar
Detergent bottle	0.4 L
Motor	220 – 240 V~
Input	1400 W

LOGISTICAL DATA

Weight net / gross	6 / 7 kg
Packaging dimensions	360 x 260 x 430 mm
Order No	5907703901
Barcode	4046664065661
20 Container	680 pcs
40 Container	1440 pcs
40 HQ Container	1680 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 194

POWERPACK



360°

1600 W

max. 135 bar











SPECIFICATIONS

Dimensions L x W x H	365 x 276 x 820 mm
Pressure max.	135 bar
Rated pressure	90 bar
Flow rate max.	408 L/h
Water temperature max.	50 °C
Detergent bottle	560 ml
Motor	220 – 240 V~
Input	1600 W

LOGISTICAL DATA

Weight net / gross	7.5 / 8.5 kg
Packaging dimensions	385 x 285 x 430 mm
Order No	5907713903
Barcode	40 46664 07357 4
20 Container	585 pcs
40 Container	1200 pcs
40 HQ Container	1440 pcs



HCE1600 | HIGH PRESSURE CLEANER

THE SCHEPPACH HCE1600 HIGH PRESSURE CLEANER IS A POWERFUL PARTNER FOR ALL JOBS AROUND YOUR HOME. WITH ITS MANY ACCESSORIES AND POWERFUL 135 BAR, IT IS A PERFECT MATCH TO TACKLE A VARIETY OF CLEANING TASKS: RVS, CARS, TRUCKS, BOATS, DECKS, DRIVEWAYS, PATIOS, LAWN EQUIPMENT AND MORE

- Powerful 1600 W motor generates up to 135 bar
- Quick Connect System, for quickly changing the accessories
- 7.5 kg weight for a solid stand and easy transport
- Large wheels for an easy transport
- Large work radius with the 5 m high pressure hose
- On-board accessory and hose storage
- Ideal for mobile applications
- Durable owing to reliable high-quality aluminium pump
- Including turbo and standard nozzle, rotating and cleaning brush, deck and patio cleaner, spray gun with extension, nozzle, adapter and detergent bottle

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 194

POWERPACK



HCE2200 | HIGH PRESSURE CLEANER

THE SCHEPPACH HCE2200 HIGH PRESSURE CLEANER IS A POWERFUL PARTNER FOR JOBS IN AND AROUND YOUR HOME. WITH ITS MANY ACCESSORIES IT IS A MATCH TO TACKLE A VARIETY OF CLEANING TASKS: HOMES, BUILDINGS, RVS, CARS, TRUCKS, BOATS, DECKS, DRIVEWAYS, PATIOS, LAWN EQUIPMENT AND MORE.

- Powerful 2200 W motor generates up to 165 bar for maximum cleaning power
- Quick Connect System, for fast change of the accessories
- 12 kg weight for a solid stand
- Versatile design tackles light, medium and heavy duty cleaning tasks
- Large wheels for an easy transport
- Large work radius with the 10 m high pressure hose
- On-board accessory and hose storage
- Ideal for mobile applications
- Durable owing to reliable high-quality aluminium pump
- Included cleaning agent container, 90° corner nozzle, 6 m drain pipe cleaning hose, turbo and standard nozzle, rotating and cleaning brush, deck and patio cleaner, spray gun with extension, nozzle, adapter and detergent bottle













LOGISTICAL DATA

Weight net / gross	12 / 13 kg
Packaging dimensions	490 x 345 x 505 mm
Order No	5907702901
Barcode	4046664065654
20 Container	313 pcs
40 Container	649 pcs
40 HQ Container	775 pcs



SPECIFICATIONS

Dimensions L x W x H	365 x 276 x 820 mm
Pressure max.	165 bar
Rated pressure	110 bar
Flow rate max.	468 L/h
Water temperature max.	50 °C
Inlet water pressure max.	4 bar
Detergent bottle	1 L
Motor	220 – 240 V~
Input	2200 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 194

POWERPACK

2400 W

max. 180 bar

360°



INCLUDED 9 PIECE ACCESSORY KIT

HCE2400 | HIGH PRESSURE CLEANER

THE SCHEPPACH HCE2400 HIGH PRESSURE CLEANER IS A POWERFUL PARTNER FOR ALL JOBS AROUND YOUR HOME. WITH ITS MANY ACCESSORIES AND POWERFUL 180 BAR IT IS A PERFECT MATCH TO TACKLE A VARIETY OF CLEANING TASKS: RVS, CARS, TRUCKS, BOATS, DECKS, DRIVEWAYS, PATIOS, LAWN EQUIPMENT AND MORE.

- Powerful 2400 W Motor generates up to 180 bar for maximum cleaning power
- Quick Connect System, for fast change of the accessories
- 11 kg weight for a solid stand and easy transport
- Versatile design tackles light, medium and heavy duty cleaning tasks
- Large wheels for an easy transport
- Large work radius with the 5 m high pressure hose
- On-board accessory and hose storage
- Ideal for mobile applications
- Durable owing to reliable high-quality aluminium pump
- Included turbo and standard nozzle, rotating and cleaning brush, deck and patio cleaner, spray gun with extension, nozzle, adapter and detergent bottle









LOGISTICAL DATA

Weight net / gross	11 / 12 kg
Packaging dimensions	440 x 345 x 505 mm
Order No	5907705901
Barcode	4046664068419
20 Container	360 pcs
40 Container	730 pcs
40 HQ Container	850 pcs

SPECIFICATIONS

Dimensions L x W x H	365 x 276 x 820 mm
Pressure max.	180 bar
Rated pressure	120 bar
Flow rate max.	480 L/h
Water temperature max.	50 °C
Detergent bottle	560 ml
Motor	230 – 240 V~
Input	2400 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 194

HCE1500 / HCE1600 / HCE2200 / HCE2400

	Order number	Barcode
1 Patio cleaner	5907702701	4046664067160
2 Detergent tank	5907702704	4046664067245
3 Kärcher adapter	5907702706	4046664067269
4 Drain pipe cleaner	5907702709	4046664069072
5 Spray lance	5907702014	4014915186571
6 Spray gun	5907702015	4014915186588
7 Adjustable spray nozzle	5907702012	4014915186557
8 Turbo nozzle	5907702013	4014915186564
9 Nozzle cleaning needle	5907702708	4046664067283
10 90° turbo nozzle	5907702705	4046664067252
11 Rotating washing brush	5907702703	4046664067207
12 Cleaning brush	5907702702	4046664067191



- Wet vacuum
- Dry vacuum
- Blower function

3 IN 1

360°

ASP12-ES | WET-DRY VACUUM CLEANER

SCHEPPACH ASP12-ES STAINLESS STEEL WET DRY VACUUM IS THE PERFECT COMPANION FOR DIY AND SMALL WORKSHOPS. EVEN THOUGH IT'S SMALL, IT COMES WITH A POWERFUL BUT QUIET 1200 W MOTOR AND A 12 L STAINLESS STEEL DRUM CONSTRUCTION. THE WORKSHOP VACUUM, WITH ACCESSORY STORAGE, IS EASY TO HANDLE, OWING TO ITS LIGHT WEIGHT, TOP HANDLE AND CASTOR FEET.

- Stainless steel tank with 12 L capacity
- Powerful 1200 W motor with 18 kPa suction power
- Blow connector for hard-to-reach areas
- Four wheels for easy transport
- Large 4.5 m working radius
- Integrated accessories holder for practical stowage
- 1.5 m suction hose with 3-part plastic tube, 38 mm diameter
- Included large combi nozzle with insert for carpets/smooth floors
- Included 1 foam filter for wet vacuuming and 1 paper bag



18 kPa

1200 W

12 L



INCLUDED 3 PLASTIC SUCTION TUBES, 1.5 M HOSE, FOAM FILTER, PAPER BAG AND COMBI NOOZLE

LOGISTICAL DATA	
Weight net / gross	4.1 / 4.6 kg
Packaging dimensions	280 x 280 x 380 mm
Order No	5907706901
Barcode	4046664068600
20 Container	960 pcs
40 Container	2000 pcs
40 HQ Container	2268 pcs

SPECIFICATIONS	
Dimensions L x W x H	260 x 260 x 420 mm
Max Vacuum Pressure	18 kpa
Vacuum capacity	12 L
Cord length	3 m
Hose length	1.5 m
Motor	220 – 240 V~
Input	1200 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 202

ASP15-ES | WET-DRY VACUUM CLEANER

WITH ITS POWERFUL 1200 W MOTOR THE SCHEPPACH STAINLESS STEEL WET DRY VACUUM ASP15-ES IS THE IDEAL TOOL FOR DIY. IT IS PERFECT FOR CLEANING THE GARAGE, CAR, HOME OR WORKSHOP. ITS STAINLESS-STEEL DRUM CONSTRUCTION, MAKES THE VACUUM CLEANER STURDY BUT NEVERTHELESS EASY TO STORE. OWING TO ITS LIGHT WEIGHT, THE TOP HANDLE AND CASTOR FEET, AND WITH ACCESSORY STORAGE, THE WORKSHOP VACUUM IS EASY TO HANDLE.

- Stainless steel tank with 15 L capacity
- Powerful 1200 W motor with 18 kPa suction power
- Blow connector for hard-to-reach areas
- 4 castors for better mobility
- Integrated accessories holder for practical stowage
- 3-piece plastic suction tube, diameter 38 mm
- 2 m suction hose, diameter 38 mm
- Included largebig combi nozzle with insert for carpets/smooth floors
- Included 1 foam filter for wet vacuuming and 1 paper bag

Wet vacuum

Dry vacuum

Blower function


18 kPa

1200 W

15 L

3 IN 1

360°

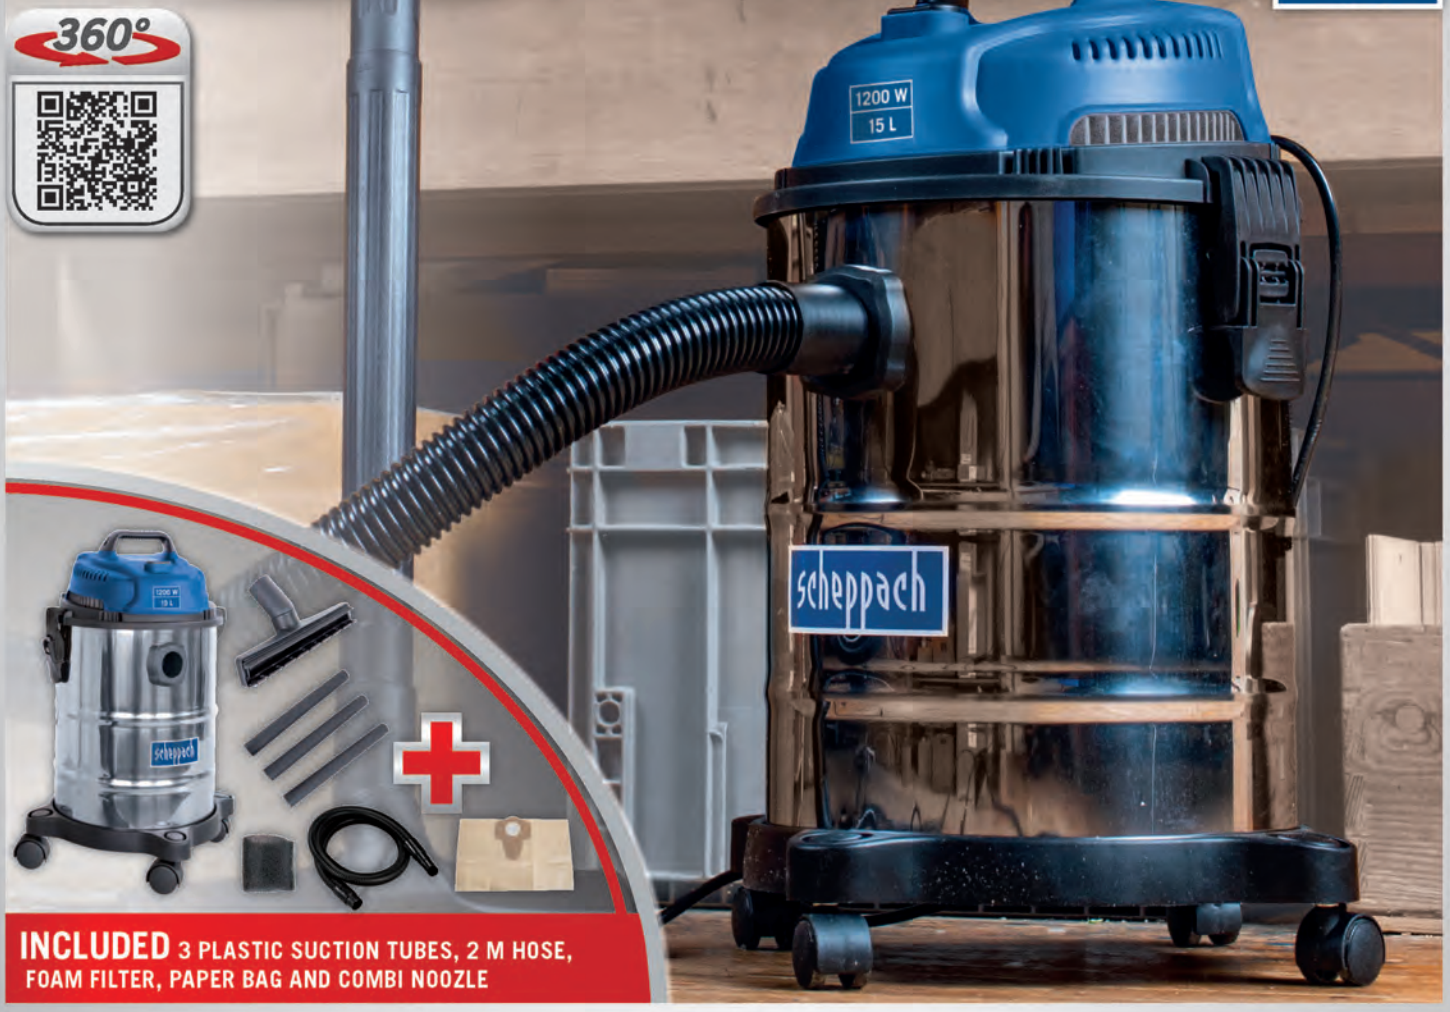

INCLUDED 3 PLASTIC SUCTION TUBES, 2 M HOSE, FOAM FILTER, PAPER BAG AND COMBI NOOZLE

LOGISTICAL DATA

Weight net / gross	3.8 / 4.2 kg
Packaging dimensions	280 x 280 x 440 mm
Order No	5907707901
Barcode	4046664068617
20 Container	800 pcs
40 Container	1680 pcs
40 HQ Container	2060 pcs



SPECIFICATIONS

Dimensions L x W x H	260 x 260 x 490 mm
Max Vacuum Pressure	18 kpa
Vacuum capacity	15 L
Cord length	3 m
Hose length	2 m
Motor	220 – 240 V~
Input	1200 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 202

ASP20-ES | WET-DRY VACUUM CLEANER

THE SCHEPPACH ASP20-ES STAINLESS STEEL WET DRY VACUUM IS, WITH ITS RUGGED CONSTRUCTION, IS DESIGNED TO DELIVER GREAT SUCTION IN A COMPACT PACKAGE. WITH ITS TOP HANDLE, CABLE WRAP, STAINLESS STEEL DRUM CONSTRUCTION, INTEGRATED BLOWER PORT AND CASTOR FEET, AND WITH ACCESSORY STORAGE, THE WORKSHOP VACUUM MEETS THE DEMANDS OF PROS, DIYERS AND HOMEOWNERS. ITS 4.5 M CABLE AND 2 M SUCTION HOSE ALLOW THE UNIT TO REACH EVEN THE FARTHEST CORNER. THE TOOL-LESS FILTER FASTENING SYSTEM MAKES INSTALLING OR REMOVING YOUR FILTER QUICK, EASY, AND SECURE.

- Stainless steel tank with 20 L capacity
- Powerful 1200 W motor with 18 kPa suction power
- Blow connector for hard-to-reach areas
- 4 castors for better mobility
- Integrated cable and accessories holder for practical stowage
- 2 m suction hose with 3-piece plastic suction tube, diameter 38 mm
- Included large comfort nozzle with insert for carpets/smooth floors, cable holder and crevice nozzle
- Included 1 foam filter for wet vacuuming and 1 paper bag



INCLUDED 3 PLASTIC SUCTION TUBES, 2 M HOSE, FOAM FILTER, PAPER BAG LONG-SQUARE BRUSH AND CREVICE NOZZLE

LOGISTICAL DATA

Weight net / gross	5.1 / 6.1 kg
Packaging dimensions	345 x 345 x 440 mm
Order No	5907708901
Barcode	4046664068624
20 Container	512 pcs
40 Container	1090 pcs
40 HQ Container	1262 pcs



SPECIFICATIONS

Dimensions L x W x H	370 x 350 x 520 mm
Max Vacuum Pressure	18 kpa
Vacuum capacity	20 L
Cord length	4 m
Hose length	2 m
Motor	220 – 240 V~ / 50 Hz
Input	1200 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 202

ASP30-ES | WET-DRY VACUUM CLEANER

THE ASP30-ES IS AN ALL-ROUNDER MEETING THE DEMANDS OF PROS, DIYERS AND HOMEOWNERS. THE 30 L STAINLESS STEEL DRUM CONSTRUCTION COVERS HEAVY DUTY REQUIREMENTS. WITH ITS POWERFUL 1400 W COMBINED WITH THE AUTOMATIC SWITCH, THE WORKSHOP VACUUM IS A RELIABLE ASSISTANT IN MANY OF THE TASKS IN THE WORKSHOP OR ON THE CONSTRUCTION SITE.
THE 4.5 M POWER CORD AND 3 M SUCTION HOSE GIVE THE ASP30-ES A RESPECTABLE WORKING RADIUS. THE LIGHTWEIGHT UNIT, WITH TOP HANDLE, CASTOR FEET AND ACCESSORY STORAGE IS EASILY MOVEABLE.

- Stainless steel tank with 30 L capacity with Water drain screw
- Powerful 1400 W motor with 20 kPa suction power
- Blow connector for hard-to-reach areas
- Power Socket with automatic switch
- 4 castors for better mobility
- Integrated cable and accessories holder for practical stowage
- 3 m suction hose with metal suction pipe, diameter 38 mm
- Included large combi nozzle with insert for carpets/smooth floors, cable holder and crevice nozzle
- Included 1 foam filter for wet vacuuming, Hepa filter and 1 paper bag

3 IN 1

20 kPa

1400 W

30 L

Wet vacuum

Dry vacuum

Blower function

360°



INCLUDED TELESCOPIC METAL HOSE, 3 PLASTIC SUCTION TUBES, 3 M HOSE, HEPA FILTER, FOAM FILTER, CREVICE NOZZLE, COMBI NOZZLE AND PAPER BAG

HEPA FILTER





SPECIFICATIONS

Dimensions L x W x H	340 x 340 x 650 mm
Max Vacuum Pressure	20 kPa
Vacuum capacity	30 L
Cord length	4 m
Hose length	3 m
Max. connected Powertool Power	2000 W
Motor	220 – 240 V~
Input	1400 W
Total rated input	3400 W

LOGISTICAL DATA

Weight net / gross	7.0 / 8.0 kg
Packaging dimensions	350 x 350 x 600 mm
Order No	5907709901
Barcode	4046664068631
20 Container	408 pcs
40 Container	816 pcs
40 HQ Container	950 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 202

ASP30-ES | WET-DRY VACUUM CLEANER

THE ASP30-ES IS AN ALL-ROUNDER MEETING THE DEMANDS OF PROS, DIYERS AND HOMEOWNERS. THE 30 L STAINLESS STEEL DRUM CONSTRUCTION COVERS HEAVY DUTY REQUIREMENTS. WITH ITS POWERFUL 1400 W COMBINED WITH THE AUTOMATIC SWITCH, THE WORKSHOP VACUUM IS A RELIABLE ASSISTANT IN MANY OF THE TASKS IN THE WORKSHOP OR ON THE CONSTRUCTION SITE.
THE 4.5 M POWER CORD AND 3 M SUCTION HOSE GIVE THE ASP30-ES A RESPECTABLE WORKING RADIUS. THE LIGHTWEIGHT UNIT, WITH TOP HANDLE, CASTOR FEET AND ACCESSORY STORAGE IS EASILY MOVEABLE.

- Stainless steel tank with 30 L capacity with Water drain screw
- Powerful 1400 W motor with 20 kPa suction power
- Blow connector for hard-to-reach areas
- Power Socket with automatic switch
- 4 castors for better mobility
- Integrated cable and accessories holder for practical stowage
- 3 m suction hose with metal suction pipe, diameter 38 mm
- Included large combi nozzle with insert for carpets/smooth floors, cable holder and crevice nozzle
- Included 1 foam filter for wet vacuuming, Hepa filter and 1 paper bag

3 IN 1

20 kPa

1400 W

30 L

Wet vacuum

Dry vacuum

Blower function

360°



INCLUDED TELESCOPIC METAL HOSE, 3 PLASTIC SUCTION TUBES, 3 M HOSE, HEPA FILTER, FOAM FILTER, CREVICE NOZZLE, COMBI NOZZLE AND PAPER BAG

HEPA FILTER





SPECIFICATIONS

Dimensions L x W x H	340 x 340 x 650 mm
Max Vacuum Pressure	20 kPa
Vacuum capacity	30 L
Cord length	4 m
Hose length	3 m
Max. connected Powertool Power	2000 W
Motor	220 – 240 V~
Input	1400 W
Total rated input	3400 W

LOGISTICAL DATA

Weight net / gross	7.0 / 8.0 kg
Packaging dimensions	350 x 350 x 600 mm
Order No	5907709901
Barcode	4046664068631
20 Container	408 pcs
40 Container	816 pcs
40 HQ Container	950 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 202

ASP50-ES | WET-DRY VACUUM CLEANER

THE SCHEPPACH 50 L PROFESSIONAL WET DRY VACUUM ASP50-ES IS DESIGNED TO DELIVER POWERFUL SUCTION, DURABLE CONSTRUCTION, AND EXCELLENT MOBILITY THAT PROS DEMAND FOR THE JOB-SITE OR WORKSHOP. THE POWERFUL 1400 W MOTOR COMBINED WITH THE AUTOMATIC SWITCH, IS THE IDEAL PARTNER FOR CONSTRUCTION SITE AND WORKSHOP. MOVING UP AND DOWN STEPS OR ACROSS ROUGH TERRAIN IS EASY WITH THE LARGE FIXED REAR WHEELS AND CART HANDLE. THE TOP HANDLE WITH CORD WRAP, HEAVY-DUTY DRUM CONSTRUCTION, BLOWER PORT, OVER-SIZED DRAIN OPENING, AND ACCESSORY STORAGE; AND YOU HAVE A VAC THAT MEETS THE DEMANDS OF A PRO.

- Stainless steel tank with 50 L capacity and Water drain screw
- Powerful 1400 W motor with 19 kPa suction power
- Blow connector for hard-to-reach areas
- With 4 castors and metal handle for better mobility
- Integrated accessories holder for practical stowage
- 3 m suction hose with metal suction tube, diameter 38 mm
- Included large combi nozzle with insert for carpets/smooth floors, 0.45 m drainage hose and crevice nozzle
- Included 1 foam filter for wet vacuuming, 1 Hepa filter and 1 paper bag



INCLUDED TELESCOPIC METAL HOSE, 3 PLASTIC SUCTION TUBES, 3 M HOSE, HEPA FILTER, FOAM FILTER, CREVICE NOZZLE, COMBI NOZZLE AND PAPER BAG

SPECIFICATIONS

Dimensions L x W x H	580 x 580 x 740 mm
Max vacuum pressure	19 kpa
Vacuum capacity	50 L
Cord length	5 m
Hose length	3 m
Max. connected Powertool Power	2000 W
Motor	220 – 240 V~
Input	1400 W
Total rated input	3400 W

LOGISTICAL DATA

Weight net / gross	10.8 / 13.1 kg
Packaging dimensions	500 x 445 x 620 mm
Order No	5907710901
Barcode	4046664068648
20 Container	400 pcs
40 Container	800 pcs
40 HQ Container	950 pcs



OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 202

1600 W

max. 65 L/s

FOR WET & DRY APPLICATION

3 IN 1



360°



ASP30 | WET-DRY VACUUM CLEANER

THE SCHEPPACH ASP30 WET-DRY VACUUM CLEANER PROVIDES POWERFUL, CONVENIENT CLEANING PERFORMANCE. WITH ITS 3-FILTER TECHNOLOGY, EVEN THE FINEST DUST IS NO PROBLEM. BECAUSE OF ITS POWERFUL 1600 W AND 30L CAPACITY, THE VACUUM CLEANER NEVER LETS YOU DOWN. THE BUILT-IN BLOWER QUICKLY MOVES DIRT AND DEBRIS FROM HARD-TO-REACH AREAS

- For wet and dry vacuum use
- Modern and practical design with large carry handle for easy transport
- Integrated 2000 W automatic switch power socket
- Robust 30 L tank
- Large rear wheels and front castors for easy movement of the unit
- Integrated blower function
- 3-Filter technology



INCLUDED 2 M HOSE, FOAM FILTER, FILTER BAG, TELESCOPIC METAL HOSE, CREVICE NOZZL, HEPA FILTER, BRUSH NOZZLE AND COMBI NOZZLE

LOGISTICAL DATA

Weight net / gross	13.5 / 16.5 kg
Packaging dimensions	600 x 375 x 575 mm
Order No	5907704901
Barcode	4046664068068
20 Container	216 pcs
40 Container	488 pcs
40 HQ Container	532 pcs



SPECIFICATIONS

Dimensions L x W x H	600 x 340 x 520 mm
Max. Airflow	65 L/sec
Max Vacuum Pressure	19 kpa
Vacuum capacity	30 L
Cord length	5 m
Hose length	2 m
Max. connected Powertool Power	2000 W
Motor	220 – 240 V~
Input	1600 W
Total rated input	3600 W

OPTIONALES ZUBEHÖR FINDEN SIE AUF SEITE 202

ASP12-ES / ASP15-ES

	Description	Order Numbers	Barcode
1 Hepa filter		7907702701	4046664070054
2 Foam filter	5 pcs	7907702703	4046664070078
3 Paper bag	5 pcs	7907702704	4046664070085
4 Re-usable cloth filter	6 pcs	7907702706	4046664070108
5 Re-usable cloth filter	2 pcs	7907702707	4046664070115
6 Re-usable cloth filter	1 pcs	7907702708	4046664070122
7 Filter cartridge		7907702709	4046664070139
8 Plastic suction tube	3 pcs	7907702713	4046664071068
9 Long-square brush		7907702714	4046664071136
10 Hose	2 m	7907702721	4046664071297



ASP20-ES / ASP30-ES / ASP30-0ES

	Description	Order Numbers	Barcode
1 Hepa filter		7907702702	4046664070061
2 Foam filter	5 pcs	7907702703	4046664070078
3 Paper bag	5 pcs	7907702705	4046664070092
4 Re-usable cloth filter	6 pcs	7907702706	4046664070108
5 Re-usable cloth filter	2 pcs	7907702707	4046664070115
6 Re-usable cloth filter	1 pcs	7907702708	4046664070122
7 Filter cartridge		7907702710	4046664070146
8 Hose	2 m	7907702711	4046664071044
9 Hose	3 m	7907702712	4046664071051
10 Plastic suction tube	3 pcs	7907702713	4046664071068
11 Long-square brush		7907702714	4046664071136
12 Telescopic metal hose		7907702717	4046664071167
13 Hose	1.5 m	7907702719	4046664071242
14 Hose	1 m	7907702720	4046664071259
15 Crevice nozzle		7907710701	4046664069614



ASP30

	Description	Order Numbers	Barcode
1 Hose	2 m	7907701701	4046664068655
2 Metal telescopic hose		7907701702	4046664068686
3 Re-usable cloth filter	2 pcs	7907701703	4046664068693
4 Hepa filter		7907701704	4046664068709
5 Foam filter		7907701705	4046664068716
6 Long-square brush		7907701706	4046664068723
7 Round brush		7907701707	4046664068730
8 Crevice nozzle		7907701708	4046664068747
9 Tool connector		7907701709	4046664068754



ASP50-ES

	Description	Order Numbers	Barcode
1 Foam filter	5 pcs	7907702703	4046664070078
2 Re-usable cloth filter	6 pcs	7907702706	4046664070108
3 Re-usable cloth filter	2 pcs	7907702707	4046664070115
4 Re-usable cloth filter	1 pcs	7907702708	4046664070122
5 Hose	3 m	7907702712	4046664071051
6 Long-square brush		7907702714	4046664071136
7 Paper bag		7907702715	4046664071143
8 Hepa filter		7907702716	4046664071150
9 Metal telescopic tube		7907702717	4046664071167
10 Drain pipe		7907702718	4046664071174
11 Crevice nozzle		7907710701	4046664069614





2019 | TOOLS CATALOGUE

Our Garden catalogue is available on our website:
www.scheppach.com

scheppach
Germany

scheppach Fabrikation von Holzbearbeitungsmaschinen GmbH
D-89335 Ichenhausen | Fon 0049/8223/4002-0 | Fax 0049/8223/4002-93
export@scheppach.com | www.scheppach.com

Artikel-Nr. 5909999029 | Ausgabe 07/2019 | Changes reserved | Responsibility cannot be accepted for translation or printing errors. We reserve the right to change the specification without prior notification.