

**iQ parts**  
IQ-PARTS-SHOP.COM



**SPECS &  
INFORMATION**



- 1 Male threaded adaptor -MA
- 2 Straight coupler - SC
- 3 Female threaded adaptor - FA
- 4 Flange adaptor - FLA
- 5 Equal bend -EB
- 6 Male threaded elbow - MB
- 7 Female threaded elbow - FB
- 8 Male threaded tee - MT
- 9 Female threaded tee - FT

## PN 16 for non-potable water

NORMA® Compression fittings are made of polypropylene for high-and-low density polyethylene tubing, diameters 16 to 110. Maximum service pressure: PN 16\* bar from diameter 16 to diameter 63 – PN 12.5 bar from diameter 75 to diameter 110. DOES NOT INCLUDE hot water application. NORMA products are made in factories certified under ISO 9001 Version 2008. NORMA® fittings are tested and approved according to these standards: ISO 14236 (Czech Republic). ITC (Poland): BS Standard 5114, AS / NZ 4129, AS 4020. These products are not certified as compliant with international sanitary regulations for transport of potable water and liquid foods.

\*PN 10 version available in our water management catalogue




### Advantages at a glance

- Safe and durable
- Fast and easily connected
- Perfect water tightness
- Locking nut for a clinching system
- Simple insertion of the tube in the fitting
- No special workforce required
- High resistance to temperature and ultraviolet shocks

### Applications

- Watering: Residential, municipal, sport fields, golf courses.
- Irrigation: Agriculture, horticulture, vineyards.
- Industry: Compressed air.

### Information

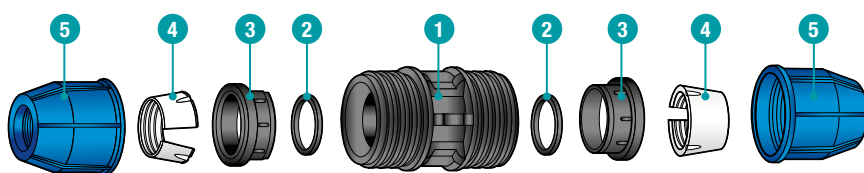

- 1 Body of Polypropylene
- 2 O-ring of NBR
- 3 Holder of Polypropylene
- 4 Clinching Ring of POM, acetal
- 5 Locking nut of Polypropylene

**Wall plate elbow – WPE**



Size mm x inch	Designation	Polypropylene homopolymer Product No.
25 x 3/4"	WALL PLATE ELBOW (WPE) 25 x 3/4"	0796 2030 360

**Male threaded adaptor with brass insert – MAB**



Size mm x inch	Designation	Polypropylene homopolymer Product No.
20 x 1/2"	MALE THREADED ADAPTOR WITH BRASS INSERT (MAB) 20 x 1/2"	0796 2651 119
25 x 3/4"	MALE THREADED ADAPTOR WITH BRASS INSERT (MAB) 25 x 3/4"	0796 2651 123
25 x 1"	MALE THREADED ADAPTOR WITH BRASS INSERT (MAB) 25 x 1"	0796 2651 125
32 x 1"	MALE THREADED ADAPTOR WITH BRASS INSERT (MAB) 32 x 1"	0796 2651 129

**Female threaded adaptor with brass insert – FAB**



Size mm x inch	Designation	Polypropylene homopolymer Product No.
20 x 1/2"	FEMALE THREADED ADAPTOR WITH BRASS INSERT (FAB) 20 x 1/2"	0796 2651 017
25 x 3/4"	FEMALE THREADED ADAPTOR WITH BRASS INSERT (FAB) 25 x 3/4"	0796 2651 024
25 x 1"	FEMALE THREADED ADAPTOR WITH BRASS INSERT (FAB) 25 x 1"	0796 2651 027
32 x 1"	FEMALE THREADED ADAPTOR WITH BRASS INSERT (FAB) 32 x 1"	0796 2651 032

**Female threaded bend with brass insert – FBB**



Size mm x inch	Designation	Polypropylene homopolymer Product No.
20 x 3/4"	FEMALE THREADED BEND WITH BRASS INSERT (FBB) 20 x 3/4"	0796 2651 053
25 x 3/4"	FEMALE THREADED BEND WITH BRASS INSERT (FBB) 25 x 3/4"	0796 2651 058
32 x 1"	FEMALE THREADED BEND WITH BRASS INSERT (FBB) 32 x 1"	0796 2651 067

NORMACONNECT®



info@iq-parts.nl  
Harsweg 34A  
2431 EZ Ter Aar  
T +31 252 624 126  
The Netherlands